

11-06-00

A

Please type a plus sign (+) inside this box ☐

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U S DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

A-004

First Inventor

Fadel, Tarek

Title

Methods and Apparatus for Implementing ...

Express Mail Label No.

EK671162570US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☐ Applicant claims small entity status.
See 37 CFR 1.27.
3. ☒ Specification [Total Pages]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets]
5. Oath or Declaration [Total Pages]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
6. ☒ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Form (CRF)
 - b. Specification Sequence Listing on:
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ paper
 - c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☐ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other: Computer Program Appendix
.....On paper--299 pages.....

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No. _____ / _____

Prior application information.

Examiner _____

Group / Art Unit _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

021253

021253

☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

PATENT TRADEMARK OFFICE

Name	Charles G. Call				
Address	Patent Attorney				
	53 Saint Stephen Street				
City	Boston	State	MA	Zip Code	02115
Country	U.S.A.	Telephone	(617) 266-2925	Fax	(508) 629-6540


Name (Print/Type)

Charles G. Call

Registration No. (Attorney/Agent)

20,406

Signature



Date November 3, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision.

Complete if Known

Application Number	
Filing Date	
First Named Inventor	Fadel, Tarek
Examiner Name	
Group Art Unit	
Attorney Docket No.	A-004

TOTAL AMOUNT OF PAYMENT (\$) **710**
METHOD OF PAYMENT

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number

Deposit Account Name

- ☐ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17
- ☐ Applicant claims small entity status. See 37 CFR 1.27

2. ☒ **Payment Enclosed:**

☐ Check ☒ Credit card ☐ Money Order ☐ Other

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Entity Fee Code	Small Entity Fee Code	Fee (\$)	Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for <i>ex parte</i> reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	
Other fee (specify) _____					

FEE CALCULATION**1. BASIC FILING FEE**

Large Entity Fee Code	Small Entity Fee Code	Fee (\$)	Fee (\$)	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	710
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$) **710****2. EXTRA CLAIM FEES**

Total Claims	Extra Claims	Fee from below	Fee Paid
10	-20** = 0	0	0
2	-3** = 0	0	0
Multiple Dependent		0	0


Large Entity Fee Code	Small Entity Fee Code	Fee (\$)	Fee (\$)	Fee Description
103	18	203	9	Claims in excess of 20
102	80	202	40	Independent claims in excess of 3
104	270	204	135	Multiple dependent claim, if not paid
109	80	209	40	** Reissue independent claims over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) **0**

**for number previously paid, if greater, For Reissues, see above

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$) **0****SUBMITTED BY**

Name (Print/Type)	Charles G. Cath	Registration No (Attorney/Agent)	20,406	Telephone	(617) 266-2925
Signature		Date	November 3, 2000		

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U. S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Inventor Information

Inventor One Given Name:: Tarek
Family Name:: Fadel
Postal Address Line One:: 20 Chestnut Street, Apt. 604
City:: Cambridge
State or Province:: MA
Country:: U.S.A.
Postal or Zip Code:: 02139
Citizenship Country:: Lebanon

Inventor Two Given Name:: David
Family Name:: Feuerstein
Postal Address Line One:: 5 Lexington Circle
City:: Bedford
State or Province:: MA
Country:: U.S.A.,
Postal or Zip Code:: 01730
Citizenship Country:: U.S.A.

Inventor Three Given Name:: Sean
Family Name:: Noyes
Postal Address Line One:: 7 Bayley Street
City:: Westwood
State or Province:: MA
Country:: U.S.A.
Postal or Zip Code:: 02090
Citizenship Country:: U.S.A.

Inventor Four Given Name:: Robert
Family Name:: Wessa
Postal Address Line One:: 129 Wilson Road
City:: Nahant
State or Province:: MA
Country:: U.S.A.
Postal or Zip Code:: 01908
Citizenship Country:: U.S.A.

Correspondence Information

Correspondence Customer Number:: 021253
Name Line One:: Charles G. Call
Address Line One:: Patent Attorney
Address Line Two:: 53 Saint Stephen Street
City:: Boston
State or Province:: MA
Country:: U.S.A.
Postal or Zip Code:: 02115
Telephone:: (617) 266-2925
Fax:: (508) 629-6540
Electronic Mail:: call@patentsoft.com

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99
0	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	
2	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99		
3	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99			
4	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90													

[illegible]

Specification

for

Methods and Apparatus for Implementing Internet Storefronts
to Provide Integrated Functions

Invented by

Tarek Fadel

20 Chestnut Street, Apt. 604
Cambridge, MA 02139
A citizen of Lebanon

David Feuerstein

5 Lexington Circle
Bedford, MA 01730
A citizen of the United States

Sean Noyes

7 Bayley Street
Westwood, MA 02090
A citizen of the United States

and

Robert Wessa

129 Wilson Road
Nahant, MA 01908
A citizen of the United States

--

Attorney Docket No. A-004
Charles G. Call, Reg. No. 20,406
53 Saint Stephen Street, Boston, MA 02115
(617) 266-2925 - _call@patentsoft.com

Field of the Invention

This invention relates to methods and apparatus for enabling online merchants to sell complex products and services using an integrated mechanism for personalizing sales, managing content and advertising, and generating reports.

Reference to Appendix and Copyright Statement

An appendix consisting of 299 pages accompanies and forms a part of this specification and contains Unix operating system script file listings and related data that illustrate a working illustrative embodiment of selected components of the invention. A portion of the disclosure of this patent document contains material that is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

Background of the Invention

The online sales market and its underlying technologies are quickly maturing. With the rapid market maturation, what were once competitive advantages are becoming commonplace. For example, most online consumers now expect competitive pricing, shopping carts, advance search capabilities, online status checking, email notifications, and more. These trends set lofty goals for companies who must develop more compelling online experiences, determine more ways to drive sales, and enhance their competitive advantages. Whether the intent is to sell complex or custom products over the Internet, to conduct one-on-one marketing, to understand the behavior and patterns of customers, to manage the ever-changing web store contents, or to enhance the ease of shopping, online companies must implement advanced techniques if they are to effectively compete

5

The ever increasing level of competition necessitates the infusion of best practices from sales and marketing with compelling product offerings. Product Managers must be able to maintain and build complex selling models without the traditional reliance on skilled programmers. Moreover, e-commerce applications need to be rapidly deployed and must be easily maintainable, even for complex & custom products.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100

In order to create distinct competitive advantages, companies must integrate sales and services. To improve customer attraction and retention, companies must develop and manage customer relationship via better sales and service integration and new technology. To insure that buyers to find what they need and place an order, the online selling process must be provide timely & accurate enterprise data, be structured in a way that is easy to use for the buyer, allow the buyer to find what they need without undue effort and frustration, and suggest products and services that are in the best interest of the customer.

Summary of the Invention

20

The present invention takes the form of a rapidly deployable, integrated online sales system which comprises a core storefront application that executes on a conventional web database server, guided buying and sales configuration capabilities for selling complex custom products and services, content management functions, a recommendation system for predicting the preferences of individual customers and making specific real-time recommendations during a shopping session, an advertising management system, a profiling system for customizing customer interactions based on the site visitor's demonstrated interests, and a reporting system that provides accurate and reliable analysis of user' behavior to create the valuable reports.

As contemplated by the invention, the core storefront database server system, the advertising management engine, the recommendation engine, the content manager, and the analysis report generator take the form of separate modules that can be rapidly integrated and deployed using pre-written installation and configuration scripts. The various components of the desired system are preferably first assembled as a pre-integrated prototype system that can be rapidly recreated, thereby seamlessly integrating the core storefront component with the other functional units. As the pre-written scripts execute during the deployment process, the installer is prompted to provide data values which are used to modify the content of pre-written configuration template files to accommodate the special needs of each individual installation. This rapid deployment methodology ensures a repeatable solution that allows businesses to quickly build and deploy e-commerce sites complete with guided buying and configuration capabilities.

In accordance with another feature of the invention, a web-based user interface provides centralized system administration functions. The administration system provides password protected log-in so that only authorized persons can perform the supported administration functions which include content management, content workflow, user management, product management, the creation of advertising programs, and the design and invocation of analytical reporting functions.

These and other objects, features and advantages of the present invention may be better understood through a consideration of the following detailed description in which frequent reference is made to the accompanying drawings.

Brief Description of the Drawings

Fig. 1 is a block diagram illustrating the relationship between the application modules that together form the integrated online sales system contemplated by the invention, and

Fig. 2 is a flow diagram illustrating the method used to rapidly deploy the integrated application to a target installation using pre-written operating system script files.

Detailed Description

5 The preferred embodiment of the invention takes the form of a fully integrated online sales system which can be used by companies that sell simple to complex products and services and which employ personalization, content management, ad management, and report generation.

10 The core of the system is provided by an online storefront seen at 101 in Fig. 1 which is preferably implement using iStore, a storefront application available from Oracle Corporation, Redwood Shores, CA, which employs the Oracle 8 relational database management system and Oracle application server. In addition, the storefront 101 preferably employs Oracle's Selling Point Internet Edition to add the guided buying and sales configuration capabilities need to sell complex products and services.

15 The storefront 101 is integrated with a content manager 103 such as the Vignette Story Server available from Vignette Corporation, Austin, TX. The storefront 103 is further integrated with a recommendation engine 105 such NetPerceptions, available from Net Perceptions, Inc. of Eden Prairie, MN, an application which provides buying recommendations to site visitors based on a prediction of each visitor's preferences. NetPerceptions is integrated with iStore by means of a pre-written Java interface called iMarketing provided by Oracle.

20 The system further integrates advertising management functions as indicated at 107 which are preferably performed by AdManager that delivers targeted advertising and by ProfileServer, which provides customized advertising presentations based on a visitors demonstrated interests while preserving visitor anonymity. Both AdManager and ProfileServer are available from Engage, Inc.

of Raleigh, NC. Finally, Log files that record visitor activity are passed to an analysis and reporting module 109 which may be implemented by the NetAnalysis program from NetGenesis Corp. of Cambridge, MA. Each of these functional units is managed by the administration module 111. Module 111 provides a Web based menu interface to permit store employs to more easily manage the system.

The additional components integrated with the storefront applications enhance the capabilities of those applications by providing implicit and explicit personalization. Implicit personalization is achieved by observing the click-stream of the user and serving up relevant content on the store pages. Explicit personalization is achieved by asking the user to explicitly rate preferences and tastes, such as hobbies, age etc. and then using these to serve up relevant content.

In order to rapidly deploy such a comprehensive e-commerce solution, the present invention makes use of a pre-integrated prototype that is used to deploy all of the underlying components required to seamlessly integrate the various components of the system. The storefront applications 101, the recommendation engine 105, , the content manager 107, the advertising manager 109, the analysis and reporting module 109, and the administration menu system 111 are first individually loaded, configured and tested on a source computer to form an operational prototype. A like system is then be installed on one or more target machines by executing operating system script files which automatically load and initially configure the separately purchased application programs which make up system. By combining these preferred components in a rapidly deployable prototype, an easily repeatable integrated solution is provided to businesses, enabling them to quickly build e-commerce sites complete with guided buying and configuration capabilities.

Storefront 101

The core storefront 101 is preferably implemented by Oracle iStore 3.1, an application designed to enable businesses to sell non-configurable products and services over the Internet. Oracle iStore is a packaged e-commerce application that provides businesses with the necessary components to create Internet store sites for selling products and services in a secure and personalized environment. iStore supports multiple payment systems, allows the store operator to manage affiliate web links, and provides customers with coupons, discounts, and special promotions. iStore operates on the underlying technology platform of provided by the Oracle 8 relational database management system and Oracle Application Server. The iStore application can be readily integrated with back-office applications such as order entry, accounts receivable, and inventory, as well as with tax and shipping systems. Using iStore and its integrated back-office applications, customers may check inventory, place orders, and follow their orders through to delivery, all through the browser interface provided by the storefront 101.

The functionality of the storefront 101 can be further enhanced by adding the guided buying and sales configuration capabilities required to sell complex and custom products and services over the Internet. Oracle SellingPoint Internet Edition delivers these capabilities in the form of a customizable DHTML (Dynamic HyperText Markup Language) window that can be integrated into iStore. The Oracle SellingPoint adds guided buying, configuration and streamlined order submission to the core capabilities of iStore.

Content Manager 103

The Vignette StoryServer application may be advantageously integrated with the storefront to provide content management functions: this application provides a content management,

personalization, decision support, and enterprise integration services to efficiently create shopping experiences that attract, engage, and retain customers. The content manager 103 simplifies the tasks performed by content authors, business users, and application developers.

5 **Recommendation Engine 105**

The recommendation engine 105 is a further application that is integrated with the storefront 105 to predict an individual shopper's preferences and make specific real-time buying recommendations during a shopping session. The recommendation engine determines each individual's preferences by observing that individual's behavior. It monitors such as click-through; analyzes past behavior; and obtains responses to queries, such as asking a shopper to rate a number of relevant items. Pooling this information with knowledge gained from a community of other individuals, the engine can makes buying recommendations with high predictive accuracy. The prototype system preferably employs the Oracle iMarketing application to provide personalized recommendations to the users, such as displaying the best selling items in the store, displaying popular items in each store section, displaying similar items bought by other users based on the items the current user has placed in his or her shopping cart.

Advertising Manager 107

The advertising manager application which forms part of the prototype system enables the site to deliver targeted advertising. The advertising manager functions are preferably performed by the AdManager and ProfileServer applications. AdManager presents automatically presents different advertising content in different sections of the store the user is browsing and works with ProfileServer which develops user profiles in real time so that the advertising which is presented to

the user is customized based on visitor's demonstrated interests while preserving the anonymity and privacy of the visitor.

Analysis and Reporting Module 109

5 During each shopping session, the prototype captures the user's behavior in log files indicated at 111 in Fig. 1. The log files 113 are then processed by the analysis and reporting module 109 to analyze the behavior of the site visitors and to provide useful management reports that can be used to provide the insight needed to improve the site's performance. The preferred prototype system integrate the functions provided b the Net Genesis NetAnalysis application to provide the desired analysis and reporting functions.

The Administration Menu System 111

10 The Administration Menu System 111 is a web based user interface that provides store employees with additional store management functionality to complement the basic management functionality provided by iStore, and to provide a unified mechanism for managing the other applications that are integrated with the storefront 101 to form the prototype systems.

15 The administration menu is password protected so that only authorized users can access its functions. As used here, the term Auser@ refers to employees, supervisors and administrators for a particular store which employs the combined functionality provided by the prototyped system. The user initially accesses the administration store system by entering a specific URL which then prompts the user to enter the correct user name and password. If the user name and password is valid, the user will see an "Admin Menu" screen which displays links to the following options (1) manage content, 20 (2) manage users, or (3) manage products. This page can serve as the home Page for all

administrative functions on the store. It provides links to all the third party products as well as to the iStore Store Manager page.

Content management functions allow users to create new product reviews or articles. The content can be optionally associated with a URL, an image and one or more keywords. The keywords are used to classify content and personalize it to consumers based on their preferences. After the content is entered, the user can click on a "start" button which will save the data to the database and begin a workflow process to obtain necessary approvals, etc as described below. Content previously saved can be located by performing a search for the title or part of the title. Once located, the user can select the content specified by the title for viewing and editing.

When content is created or edited, it goes through a pre-defined workflow. The workflow steps are:

(1) a given content item is created, or existing content is edited.

(2) the content item is displayed on a store supervisor or administrator's tasklist which is divided into two portions: the top portion consists of a status list of all the content currently in the system and the bottom portion consists of a list of all content currently in workflow. The status list specifies the title of the content, its type, its status in the workflow process (ready to launch, live or expired, and potential actions that can be taken with respect to the item (launch content, change status to live or expired, etc.).

(3) The Store Supervisor/Administrator will click on "Edit" under the Edit column to review the content, make any necessary changes, and save the content.

(4) The Store Supervisor/Administrator will click on "Finish" under the Action column.

(5) The Store Administrator will click on "Launch" under the Action column.

(6) The Store Administrator may click on "Expire" under the Action column to remove the content from the live site. Note: Store products are not be subject to the workflow.

The Amanage users@ option on the main administrative menu permits the user to perform a search of a specific user. When the search results are displayed, the person managing users can the click on the user of interest to bring up the user description page. This page includes means for changing the password for the selected user.

The administrative menu system 111 provides product management tools. The Find Product function in the Administration Menu uses iStore's PowerSearch functionality to allow a Store Employee/Supervisor/Administrator find a product from the iStore tables. Results will be displayed in a window below the search fields and the user can double-click a product in order to edit its information. A Retrieve/Edit/Submit Product Information option reveals a screen that allows attributes of the product (retrieved from the step above) to be changed by Store Employees, Supervisors, and Administrators. The attributes that can be changed include product name, label, description, image and manufacturer.

The manage accounts option on the administrative menu permits the user to search for particular accounts. Search results will be returned in a window and the Employee / Supervisor / Administrator can scroll through a list of matching accounts and double-click on the one they want to manage. Double clicking on an account opens a new window where the user will be able to enter a new password and must type the same password in a "Verify Password" field. If the passwords match it will be changed to the new password.

20 A link in the manage accounts screen takes the user to the AdManager application that allows the user to create AdCampaigns. Based on the criteria set in these ad campaigns, the AdManager will randomly serve these ads on the Store pages.

A further link takes the user to NetAnalysis reporting that allows the user to choose the types of reports that need to be generated and run them on the Store log files.

An additional link takes the Store Administrator/ Supervisor to the iStore Manager page provided by iStore for regular store management.

5

Deploying the Prototype

As noted earlier, the rapid deployment and initialization of a complete system which combines the functionality provided by the several integrated applications is achieved through the use of operating system script files which automatically installs the various packaged software products, as purchased from each software vendor.

Performance improvements may be made by utilizing a middle tier approach in which the database functions are handled on one server and one or more application servers are used for the various integrated applications. When this approach is used, a separate installation is performed for each application. Note that the Oracle Application Server and Vignette require the presence of the Apache Web server which means these combinations must be installed and kept together on whatever server is chosen. An installation could potentially have separate application servers for iStore and Vignette.

While there are a number of files that make up the set of scripts required to clone the prototype system on the source machine, the actual number of files which must be executed by the system administrator to install a new iPrototype Storefront consists only of one file: setup.sh. The setup.sh script will prompt the user for all the necessary information to complete the installation using the cloning scripts. It is assumed that user has first performed the proper pre-installation tasks and is

familiar with the process before setup.sh is executed to call the proper scripts based on the answers provided to prompts.

Part IV of the Appendix contains a full list of all the Required Setup Information prompted by the setup.sh script. A first time install can usually use the default values that have been supplied.

5 Part V of the Appendix contains an explanation of the supporting shell scripts and other files which comprise the cloning scripts and may be called by the setup.sh script, or by a script which was called by that script. It is not necessary to fully understand exactly how the cloning scripts work, but this is explained here for the interested user.

There are three main reasons for using the automated Acloning method of installation contemplated by the present invention, rather than using the standard installation procedure for the each of the products which comprise the iPrototype Storefront: to perform the installation more rapidly, to improve consistency, and to automate the integration of the various application program which form the online sales system.

There is a significant time savings with this method as opposed to performing a standard install for each product. As described above, there are several different products which comprise the iPrototype Storefront. The total installation time for all of them using conventional procedures would typically be measured in hours or more likely days when they are separately installed. In contrast, installation time for all products using the cloning approach can be measured in minutes on most machines.

20 In addition to the time saving of cloning versus a standard install for each product, the installer also saves a more substantial amount of time integrating the products. The files used in the cloning process are based on a working iPrototype Storefront. All products have already been integrated and are working together. This is a substantial time savings measured in days or more likely even in

weeks. Finally, after running the cloning scripts, the installer is assured of an integrated system that is working together properly.

To execute an installation, the user need merely perform the following steps:

1. Ensure that all files in the target system have a good backup.
2. Completed the pre installation steps and know the answers to the questions you will be asked by the cloning scripts.
3. Log in to the target machine as root.
4. Execute setup.sh.
5. Answer the questions properly for the target's specific environment

As previously mentioned, the iPrototype Storefront Cloning scripts perform a complete install by essentially copying an existing Storefront that has been fully integrated and is fully functional onto your machine. The initial iPrototype Storefront system integrating the various components is first installed and tested at a source installation. A copy of the necessary files for cloning this source installation is contained in the tar files from the installation media. The cloning scripts themselves are written and tested in at the source installation.

The task of Acopying@ a storefront to another machine is by no means a simple copy of source prototype's files from one machine to another. There are numerous files which contain site specific information which will not function properly in a new environment. The task of Acloning@ must therefore not only make a copy of all files, it must then reconfigure the appropriate files to contain the proper information for the new environment.

The deployment method is illustrated in Fig. 2 of the drawings. A main script file calls a series of application specific script files as illustrated at 201. Each subscript or set of subscripts performs the installation of a particular application module and issues prompts to the installer

indicating needed configuration data values and option choices as illustrated at 205 and accepts the values provided in response as indicate at 207.

This reconfiguration is achieved using a set of template files, which are reconfigured for the new environment. This set of template files consist of every file for all applications which contain any site specific configuration information. The template file is almost but not quite an exact copy of the original file from which it is based. Any site specific information has been replaced with a predefined string. This predefined string can be identified and located by the cloning scripts, which will then replace this string with a new value which is the actual value specific for the new machine hosting the new storefront site. These new values are derived from questions answered by the installer when he or she runs the setup script and are posted as illustrated at 209 in Fig. 2. There are dozens of files which must be edited and reconfigured, which means there are dozens of questions posed in the initial setup phase. The content of each of these template files is listed in the Appendix.

In addition to templates files, there are SQL scripts which must run to update information in the database to complete the reconfiguration. Proper execution of the iPrototype cloning scripts should result in a working storefront. The storefront and supporting server applications should be working and should include the applications selected when executing the cloning scripts.

Conclusion

It is to be understood that the methods and apparatus that have been described are merely illustrative applications of the principles of the present invention. Numerous modifications may be made by those skilled in the art without departing from the true spirit and scope of the invention.

What is claimed is:

1 1. An integrated online sales system which comprises, in combination,
2 a web database server connected to the Internet for storing product, customer and sales
3 transaction data, and
4 means for installing and managing the integrated operation of a cooperating set of
5 separate application program modules comprising:
6 a storefront application which executes on said web database server,
7 a content management application for creating and updating product data stored on said
8 database server,
9 a recommendation system for analyzing said customer and sales transaction data for
10 predicting the preferences of individual customers and making specific real-time
11 recommendations during a shopping session,
12 an advertising management application for selectively presenting advertising to each
13 customers during a shopping session, and
14 a reporting system for analyzing said sales transaction data to generate reports.

1 2. An integrated online sales system as set forth in claim 1 wherein said means for
2 installing and managing the integrated operation of said application program modules includes
3 pre-written operating system scripts for rapidly deploying said sales system onto one or more
4 target computers by automatically issuing prompts and accepting data values during the course of
5 the installation of said application program modules to modify said integrated system in
6 accordance with the needs of an individual installation.

1 3. An integrated online sales system as set forth in clam 2 wherein said means for
2 installing comprises a set of template configuration files and wherein said scripts when executed
3 issue prompts and accept data for modifying the content of said template configuration files in
4 accordance with the needs of an individual installation.

1 4. An integrated online sales system as set forth in claim 1 wherein said means for
2 installing and managing the integrated operation of said application program modules includes an
3 administration system that provides a Web interface for permitting authorized users to perform
4 centralized system administration functions.

1 5. The integrated online sales system as set forth in claim 4 wherein said administration
2 system performs a password protected log-in procedure to permit only authorized persons to
3 perform administration functions.

1 6. A method for rapidly deploying an integrated online sales system for performing online
2 sales transactions which comprises, in combination, the steps of:

3 providing a web database server connected to the Internet for storing product, customer
4 and sales transaction data in database tables, and

5 providing an integrated set of one or more pre-written operating system installation
6 scripts to perform the steps of:

7 installing a storefront application for execution on said web database server,

8 installing a content management application for creating and updating product data stored
9 in said database tables,

10 installing a profiling application for accumulating customer profile data describing the
11 activity of individual customers during shopping sessions,

12 installing a recommendation application for analyzing said customer profile data and said
13 sales transaction data to predicting the preferences of individual customers and for making
14 specific real-time recommendation to customers during a shopping session,

15 installing an advertising management application for selectively presenting advertising to
16 each customers during a shopping session, and

17 installing a reporting application for analyzing said sales transaction data to generate
18 reports.

1 7. The method as set forth in claim 6 wherein said pre-written operating system scripts

2 automatically perform the steps of issuing prompts and accepting data values during the course of
3 the installation of said application program modules to modify the operation of applications in
4 accordance with the needs of an individual installation.

1 8. The method as set forth in claim 7 wherein each of said applications accesses a
2 configuration file and wherein the steps of issuing prompts and accepting data modify the content
3 of each of said configuration files in accordance with the needs of an individual installation.

1 9. The method as set forth in claim 7 further comprising the steps of installing an
2 administration application and employing said administration application to present a centralized
3 menu system to an authorized user for performing centralized system administration functions.

1 10. The method as set forth in claim 9 wherein said administration system performs a
2 password protected log-in procedure to permit only authorized persons to perform said
3 centralized administration functions using said centralized menu system.

Abstract of the Disclosure

A rapidly deployable, integrated online sales system consisting of a core storefront application that executes on a conventional web database server, a guided buying and sales configuration module for selling complex custom products and services, a content management module, a recommendation system for predicting the preferences of individual customers and making specific real-time recommendations during a shopping session, an advertising management system, a profiling system for customizing customer interactions based on the site visitor's demonstrated interests, and a reporting system that provides accurate and reliable analysis of user' behavior to create the valuable reports. The various components of the desired system are preferably first assembled as a pre-integrated prototype system on a source computer that can be rapidly recreated using pre-written operating system installation scripts which execute during the deployment process, prompting the installer to provide data values used to modify the content of pre-written configuration template files to accommodate the special needs of each individual installation. A web-based user interface provides centralized system administration which include content management, content workflow, user management, product management, the creation of advertising programs, and the design and invocation of analytical reporting functions.

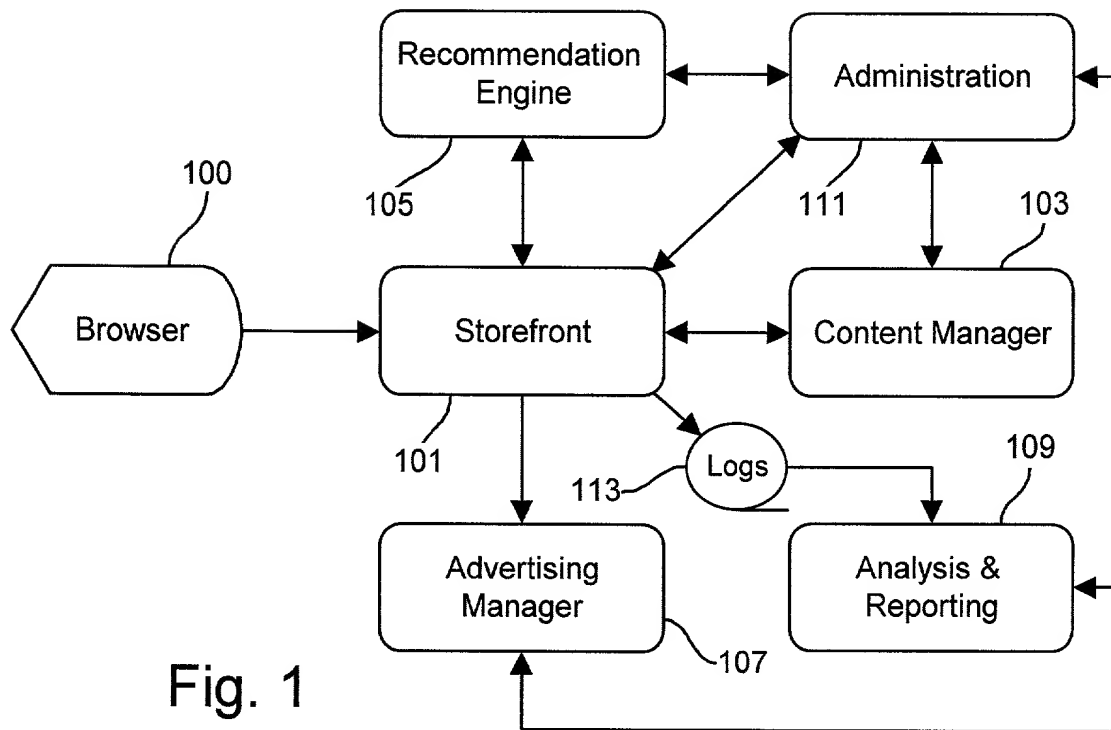


Fig. 1

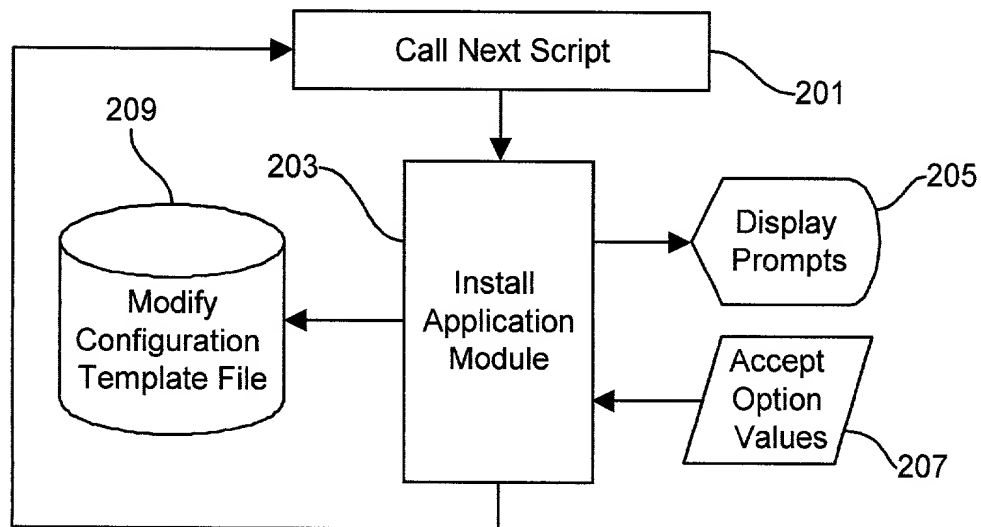


Fig. 2

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.



DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	A-004
	First Named Inventor	Fadel, Tarek
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Methods and Apparatus for Implementing Internet Storefronts to Provide Integrated Functions

the specification of which (Title of the Invention)

☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number **021253**
OR
☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number **021253** OR ☐ Correspondence address below

Name	Charles G. Call				
Address	Patent Attorney				
Address	53 Saint Stephen Street				
City	Boston	State	MA	ZIP	02115
Country	U.S.A.	Telephone	(617) 266-2925	Fax	(617) 424-6779

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])	Family Name or Surname
Tarek	Fadel

Inventor's Signature					Date	10/23/00	
Residence: City	Cambridge	State	MA	Country	U.S.A.	Citizenship	Lebanon
Post Office Address	20 Chestnut Street, Apt. 604						
Post Office Address							
City	Cambridge	State	MA	ZIP	02139	Country	U.S.A.

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet

Page 2 of 2

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

David Marc

Feuerstein

Inventor's
Signature

Date

10/11/00

Residence: City

Bedford

State

MA

Country

U.S.A.

Citizenship

U.S.A.

Post Office Address

5 Lexington Circle

Post Office Address

City

Bedford

State

MA

ZIP

01730

Country

U.S.A.

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Shawn

Noyes

Inventor's
Signature

Date

10/30/00

Residence: City

Westwood

State

MA

Country

U.S.A.

Citizenship

U.S.A.

Post Office Address

7 Bayley Street

Post Office Address

City

Westwood

State

MA

ZIP

02090

Country

U.S.A.

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Robert

Wessa

Inventor's
Signature

Date

10/13/2000

Residence: City

Nahant

State

MA

Country

USA

Citizenship

U.S.A.

Post Office Address

129 Wilson Road

Post Office Address

City

Nahant

State

MA

ZIP

01908

Country

U.S.A.

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Appendix to Specification

for

Methods and Apparatus for Implementing Internet

Storefronts to Provide Integrated Functions

invented by

Tarek Fadel, David Feuerstein, Sean Noyes and Robert Wessa

Attorney Docket A-004, Law Offices of Charles G. Call, Reg. No. 20,406

Table of Contents

Script File Listings	Pages 1 - 290
Appendix I - User and Group Names	Page 291
Appendix II - Port Usage	Page 292
Appendix III - Base Port Number Restrictions	Page 293
Appendix IV - Required Setup Information	Page 294 - 297
Appendix V - Shell Script Reference	Page 298 - 299

```
#!/bin/ksh
# Filename:  setup.sh
# Author:   Robert Wessa
# Parameters:      None
#
# Description:      This file will prompt the user for the necessary input
#                  parameters to run the iPrototype installation.
#
#                  This file will prompt you for directory, port number,
#                  username, etc., information.  Please note the following two key
#                  items.
#
#                  Install type: (Full, DB only, iStore/OAS/iMarketing only,
#                  Vignette only).
#                  The installation has the ability to load everything on one
#                  server or split it into a multitier architecture, consisting
#                  of a database tier, application server/iStore/iMarketing tier,
#                  and a Vignette tier.
#
#                  iStore, OAS and iMarketing must be on the same server. They
#                  can be included with the database on one central server or
#                  loaded separately onto a middle tier applications server.
#
#                  If the install type is
#                  Full:      all products will be installed
```



```

#         DB Only: only the database (database files and software) will
#             be loaded onto the current machine.
#         Application server: iStore, OAS, and iMarketing are installed
#             on the current machine.
#         Vignette only: only the Vignette and Apache piece will be
#             installed. Vignette requires the Apache server and does not
#             work with OAS currently.
#
#         If you do not choose a full install, you must install each
#             of the other options separately.
#
#         Vignette Inclusion: Vignette can be included or dropped
#             from the solution set.
#
#         If the solution includes Vignette
#             iStore templates which call Vignette will be copied.
#         If the solution does not include Vignette
#             iStore templates which do not call Vignette will be copied.
#             The Vignette schema will be removed from the database.
#             The Vignette files will be removed from the file system
#             The Apache files will be removed from the file system.
#             Apache and Vignette references will be removed from the
#             startup scripts.
#
#         After prompting for the required information, other variables
#             will be defined based on the values just received.
#
#listener3      1559/tcp      #Oracle ispeed db listener
#ispnodemgr3    7781/tcp      #iSpeed OAS Node mgr
#ispadminmgr3   7782/tcp      #iSpeed OAS admin mgr
#vhs_port3      56624       #iSpeed Vignette VHS Port
#storeadmin3    16000       #iSpeed store admin
#store3         16001       #iSpeed store
#lots3          16005       #iSpeed lots
#ispeed3        16007       #iSpeed store
#store3         16649       #iSpeed ORB
#storedeploy3   16999       #iSpeed store deploy
#apache3        31201       #iSpeed Apache server
#casccachemgr3  31206       #iSpeed vignette CAS Cache mgr
#casplcmgr3     31207       #iSpeed vignet CAS placement mgr
#castmplmgr3    31208       #iSpeed vignett CAS template mgr
#caspaggen3     31209       #iSpeed vignette CAS page gener

```

```

#cmsserver3      31210                      #iSpeed vignette CMS Server
#netp4           9350                      #Net Perception
# =====
# Revision History
# Date           Who           Why
# 01/31/2000  rwessa          Initial create date
#
# =====
# =====
# =====
# ===== Begin Main Program =====
# =====

date
#
# determine the installation type
# we can install everything on the current machine, just the database,
# or just the OAS/iStore/iMarketing piece.
# we do loop through until we get a valid response (F,I or D) to this question
ans_ok="N"
#echo starting while
while [ "$ans_ok" = "N" ]
do
    export INSTALL_TYPE=F
    echo
    echo "Please specify 1 of the 4 installation types to be performed."
    echo "  Vignette/Apache only(V)"
    echo "  iStore/OAS/iMarketing only(I)"
    echo "  Database only (D)"
    echo "  Full solution set(F)"
    echo "  Exit installer without installing anything(X)"
    echo "Please select one of the above (V,I,D,F, X) [$INSTALL_TYPE]"
    read ans
    if [ $ans ] ; then
        INSTALL_TYPE=`echo ${ans} | tr "[a-z]" "[A-Z]"`
        if [ "$INSTALL_TYPE" = "V" ] ; then
            ans_ok="Y"
        elif [ "$INSTALL_TYPE" = "I" ] ; then
            ans_ok="Y"
        elif [ "$INSTALL_TYPE" = "D" ] ; then
            ans_ok="Y"
        elif [ "$INSTALL_TYPE" = "F" ] ; then
            ans_ok="Y"

```



```

elif [ "$INSTALL_TYPE" = "X" ] ; then
    ans_ok="Y"
    echo "Installing terminated, no installation tasks performed."
    exit
else
    echo
    echo Please answer V,I,D,F or X. $INSTALL_TYPE is an invalid response.
    ans_ok="N"
fi
else
    ans_ok="Y"
fi
done
#
# determine if we will include Vignette in the solution set
# we do loop through until we get a valid response (Y or N) to this question
ans_ok="N"
#echo starting while
while [ "$ans_ok" = "N" ]
do
    INCLUDE_VIGNETTE=Y
    echo "Will Vignette be part of the solution set (Y or N) [$INCLUDE_VIGNETTE]"
    read ans
    if [ $ans ] ; then
        INCLUDE_VIGNETTE=`echo ${ans} | tr "a-z" "A-Z"`
        if [ "$INCLUDE_VIGNETTE" = "Y" ] ; then
            ans_ok="Y"
        elif [ "$INCLUDE_VIGNETTE" = "N" ] ; then
            ans_ok="Y"
        else
            echo
            echo Please answer Y or N, $INCLUDE_VIGNETTE is an invalid response.
            ans_ok="N"
        fi
    else
        ans_ok="Y"
    fi
done
#
export SHOWDBG="NO"
echo "Would you like to see debugging information (YES/NO? [$SHOWDBG]"
read ans
if [ $ans ] ; then

```

```

SHOWDBG=$ans
fi
#
# obtain general information
export INSTALL_HOME=`pwd`
echo "Enter the installation home directory[$INSTALL_HOME]"
read ans
if [ $ans ] ; then
    INSTALL_HOME=$ans
fi
#
export USER_BASE_DIR=/u08/users
echo "Enter the base user home directory [$USER_BASE_DIR]"
read ans
if [ $ans ] ; then
    USER_BASE_DIR=$ans
fi
#
export BASE_DIR=/u08/app
echo "Enter the base applications directory [$BASE_DIR]"
read ans
if [ $ans ] ; then
    BASE_DIR=$ans
fi
#
# obtain previous installation information
export OLD_HOSTNAME=dallsoluctrsv01
echo "Enter the old hostname [$OLD_HOSTNAME]"
read oh
if [ $oh ] ; then
    OLD_HOSTNAME=$oh
fi
#
export OLD_ORACLE_SID=ISP01
#export OLD_ORACLE_SID=FITS
echo "Enter the old ORACLE_SID [$OLD_ORACLE_SID]"
read oos
if [ $oos ] ; then
    OLD_ORACLE_SID=$oos
fi
# #####
#export OLD_APACHE_BASE=454
export OLD_APACHE_BASE=65

```

```

echo "Enter the old Apache Base number [OLD_APACHE_BASE] "
read oab
if [ $oab ] ; then
    OLD_APACHE_BASE=$oab
fi
#
# obtain new user information
export ORACLE=sp01ora
echo "Enter the Oracle OS username [$ORACLE] "
read ou
if [ $ou ] ; then
    ORACLE=$ou
fi
#
export APACHE=sp0lap
echo "Enter the apache OS username [$APACHE] "
read au
if [ $au ] ; then
    APACHE=$au
fi
#
export ICS=sp0lics
echo "Enter the iStore OS username [$ICS] "
read iu
if [ $iu ] ; then
    ICS=$iu
fi
#
export NETP=sp0lnp
echo "Enter the Net Perceptions OS username [$NETP] "
read ans
if [ $ans ] ; then
    NETP=$ans
fi
#
#export OLD_ORACLE_NP_BASE=/u02/app/fitsnp
export OLD_ORACLE_NP_BASE=/u05/app/isp01ora
echo "Enter the old Net Perceptions base directory [OLD_ORACLE_NP_BASE] "
read ans
if [ $ans ] ; then
    OLD_ORACLE_NP_BASE=$ans
fi
#

```

```

export VIGNETTE=sp01vg
echo "Enter the Vignette OS username [$VIGNETTE]"
read ans
if [ $ans ] ; then
    VIGNETTE=$ans
fi
# #####
#export CAS_PORT_OLD="45440"
export CAS_PORT_OLD="6540"
echo "Enter the old Vignete CAS Port [$CAS_PORT_OLD]"
read ans
if [ $ans ] ; then
    CAS_PORT_OLD=$ans
fi
#export ORACLE_VGN_BASE_OLD="/u02/app/fitsvg"
export ORACLE_VGN_BASE_OLD="/u05/app/isp01vg"
echo "Enter the old Vignete base directory [$ORACLE_VGN_BASE_OLD]"
read ans
if [ $ans ] ; then
    ORACLE_VGN_BASE_OLD=$ans
fi
#
export GROUPNAME=dba
echo "Enter the new Group name for these users [$GROUPNAME]"
read ans
if [ $ans ] ; then
    GROUPNAME=$ans
fi
#
export ORACLE_SID=SP01
#create a lower case and upper case version, both are needed
export oracle_sid=`echo $ORACLE_SID | tr " [A-Z]" " [a-z]"`
ORACLE_SID=`echo $ORACLE_SID | tr " [a-z]" " [A-Z]"`
echo "Enter the new ORACLE_SID [$ORACLE_SID]"
read ans
if [ $ans ] ; then
    ORACLE_SID=`echo $ans | tr " [a-z]" " [A-Z]"`
    oracle_sid=`echo $ans | tr " [A-Z]" " [a-z]"`
fi
#
export ORACLE_BASE=$BASE_DIR/$ORACLE
echo "Enter the location for your ORACLE_BASE [$ORACLE_BASE]"
read ans

```

```

if [ $ans ] ; then
    ORACLE_BASE=$ans
fi
#
export ORACLE_HOME=$ORACLE_BASE/product/805
echo "Enter the location for your ORACLE_HOME [$ORACLE_HOME]"
read ans
if [ $ans ] ; then
    ORACLE_HOME=$ans
fi
#
export ORACLE_OAS_BASE=$BASE_DIR/$ICS
echo "Enter the location for your ORACLE_OAS_BASE [$ORACLE_OAS_BASE]"
read ans
if [ $ans ] ; then
    ORACLE_OAS_BASE=$ans
fi
#
export ORACLE_OAS_PROD_BASE=$ORACLE_OAS_BASE/product/OAS4081
echo "Enter the location for your ORACLE_OAS_PROD_BASE [$ORACLE_OAS_PROD_BASE]"
read ans
if [ $ans ] ; then
    ORACLE_OAS_PROD_BASE=$ans
fi
#
export OAS_SITE_NAME=$ORACLE_SID
echo "Enter your new OAS_SITE_NAME [$OAS_SITE_NAME]"
read ans
if [ $ans ] ; then
    OAS_SITE_NAME=$ans
fi
#
# obtain Vignette information
#
export OAS_SITE_NAME_OLD=$OLD_ORACLE_SID
echo "Enter your old OAS_SITE_NAME [$OAS_SITE_NAME_OLD]"
read ans
if [ $ans ] ; then
    OAS_SITE_NAME_OLD=$ans
fi
#
export ORACLE_VGN_BASE=$BASE_DIR/$VIGNETTE
echo "Enter the location for your Vignette base directory [$ORACLE_VGN_BASE]"

```



```

read ans
if [ $ans ] ; then
    ORACLE_VGN_BASE=$ans
fi
#
# obtain Apache information
#
export ORACLE_AP_BASE=$BASE_DIR/$APACHE
echo "Enter the location for your Apache base directory [$ORACLE_AP_BASE]"
read ans
if [ $ans ] ; then
    ORACLE_AP_BASE=$ans
fi
#
export APACHE_BASE=245
echo "Enter the Apache Ports Base #[$APACHE_BASE]"
read apacheb
if [ $apacheb ] ; then
    APACHE_BASE=$apacheb
fi
#
# obtain NetP information
#
export ORACLE_NP_BASE=$BASE_DIR/$NETP
echo "Enter the location for your Net Perceptions base directory [$ORACLE_NP_BASE]"
read ans
if [ $ans ] ; then
    ORACLE_NP_BASE=$ans
fi
#
#
# #####
export NETP_PORT=${APACHE_BASE}35
echo "Enter the new Net Perceptions port # [$NETP_PORT]"
read np
if [ $np ] ; then
    NETP_PORT=$np
fi
#
# obtain DB file information
#
export DB_ROOT_DIR=/u08/oradata
echo "Enter the parent Oracle database file directory[$DB_ROOT_DIR]"

```

```

read ans
if [ $ans ] ; then
    DB_ROOT_DIR=$ans
fi
#
export DB_DATA_DIR=${DB_ROOT_DIR}/${ORACLE_SID}
echo "Enter the base Oracle database file directory[$DB_DATA_DIR]"
read ans
if [ $ans ] ; then
    DB_DATA_DIR=$ans
fi
#
export DB_HOSTNAME=`hostname`
echo "Enter the database server hostname if different [$DB_HOSTNAME]"
read ans
if [ $ans ] ; then
    DB_HOSTNAME=$ans
fi
#
# obtain environment information
#
export DOMAIN=us.oracle.com
echo "Enter the new domain [$DOMAIN]"
read dom
if [ $dom ] ; then
    DOMAIN=$dom
fi
#
export proxyserver=www-proxy.us.oracle.com
echo "Enter the new proxy server [$proxyserver]"
read ps
if [ $ps ] ; then
    proxyserver=$ps
fi
#
export proxyport=80
echo "Enter the new proxy port [$proxyport]"
read pp
if [ $pp ] ; then
    proxyport=$pp
fi
#
# obtain OAS information

```

```

#
# #####
export OAS_BASE=245
echo "Enter the OAS Ports Base # [$OAS_BASE]"
read oasb
if [ $oasb ] ; then
    OAS_BASE=$oasb
fi
#
export OAS_NODE_PORT=${OAS_BASE}12
echo "Enter your OAS_NODE_PORT [$OAS_NODE_PORT]"
read ans
if [ $ans ] ; then
    OAS_NODE_PORT=$ans
fi
#
export OAS_NODE=${OAS_NODE_PORT}
echo "Enter the new OAS Node port number [$OAS_NODE]"
read oasn
if [ $oasn ] ; then
    OAS_NODE=$oasn
fi
#
export TNS_PORT=${OAS_BASE}37
echo "Enter the new TNS Port number [$TNS_PORT]"
read tnsp
if [ $tnsp ] ; then
    TNS_PORT=$tnsp
fi
#
export VHS_PORT=${OAS_BASE}36
echo "Enter the VHS Port number [$VHS_PORT]"
read vhsp
if [ $vhsp ] ; then
    VHS_PORT=$vhsp
fi
#
export OAS_ORB_BASE=${OAS_BASE}14
echo "Enter the OAS ORB Base [$OAS_ORB_BASE]"
read oasob
if [ $oasob ] ; then
    OAS_ORB_BASE=$oasob
fi

```

```

#
export OAS_ADMIN=${OAS_BASE}13
echo "Enter the new OAS Admin port # [$OAS_ADMIN]"
read oasa
if [ $oasa ] ; then
    OAS_ADMIN=$oasa
fi
#
# obtain tar file information
#
#export TAR_DIR=/u14/cdimage/iPrototype/WithoutEMU
export TAR_DIR=/u13/stage/SellingPoint.com
echo "Enter the directory location containing the TAR files [$TAR_DIR]"
read tdir
if [ $tdir ] ; then
    TAR_DIR=$tdir
fi
#
export ORACLETS_FILE=oraclets.tar.Z
echo "Enter the Oracle technology stack tar file [$ORACLETS_FILE] "
read ans
if [ $ans ] ; then
    ORACLETS_FILE=$ans
fi
#
export ORADATA_FILE=oradata.tar.Z
echo "Enter the Oracle data tar file [$ORADATA_FILE] "
read ans
if [ $ans ] ; then
    ORADATA_FILE=$ans
fi
#
export MIDTIER_FILE=middletier.tar.Z
echo "Enter the Middle Tier tar file [$MIDTIER_FILE] "
read ans
if [ $ans ] ; then
    MIDTIER_FILE=$ans
fi
#
export NETP_FILE=netp.tar.Z
echo "Enter the Net Perceptions tar file [$NETP_FILE] "
read ans
if [ $ans ] ; then

```

```

    NETP_FILE=$ans
fi
#
export APACHE_FILE=apache.tar.Z
echo "Enter the Apache tar file [$APACHE_FILE] "
read ans
if [ $ans ] ; then
    APACHE_FILE=$ans
fi
#
export VIGNETTE_FILE=vignette.tar.Z
echo "Enter the Vignette tar file [$VIGNETTE_FILE] "
read ans
if [ $ans ] ; then
    VIGNETTE_FILE=$ans
fi
#
# Need to know db usernames
export DB_USER_NETP=netp
echo "Enter the Net P Database username[$DB_USER_NETP] "
read ans
if [ $ans ] ; then
    DB_USER_NETP=$ans
fi
#
export DB_PW_NETP=netp
echo "Enter the Net P Database password [$DB_PW_NETP] "
read ans
if [ $ans ] ; then
    DB_PW_NETP=$ans
fi
#
# #####
#export STARTUP_LOCATION=$USER_BASE_DIR/$ORACLE
export STARTUP_LOCATION=$INSTALL_HOME/startup
echo "Enter the directory in which to place startup scripts [$STARTUP_LOCATION] "
read ans
if [ $ans ] ; then
    STARTUP_LOCATION=$ans
fi
#
export LOGDIR=$INSTALL_HOME/log
echo "Enter the directory to write installation log files [$LOGDIR] "
read ans

```

```

if [ $ans ] ; then
    LOGDIR=$ans
fi
#
export SUMMARY_FILE=$LOGDIR/summary.log
echo "Enter the summary file name [$SUMMARY_FILE] "
read ans
if [ $ans ] ; then
    SUMMARY_FILE=$ans
fi
#
export INSTALL_LOGFILE=$LOGDIR/install.log
echo "Enter the installation log file name [$INSTALL_LOGFILE] "
read ans
if [ $ans ] ; then
    INSTALL_LOGFILE=$ans
fi
#
# need $TOOLS_DIR for previous version compatibility
TOOLS_DIR="shouldnotbeused" ; export TOOLS_DIR
HOSTNAME=`hostname | tr "[a-z]" "[A-Z]"` ; export HOSTNAME
hostname=`echo ${HOSTNAME} | tr "[A-Z]" "[a-z]"` ; export hostname
IP_ADDRESS=`grep ${hostname} /etc/hosts | awk '{print $1}'` ; export IP_ADDRESS
ORACLE_SID=`echo ${ORACLE_SID} | tr "[a-z]" "[A-Z]"` ; export ORACLE_SID
oracle_sid=`echo ${ORACLE_SID} | tr "[A-Z]" "[a-z]"` ; export oracle_sid
OLD_ORACLE_SID=`echo ${OLD_ORACLE_SID} | tr "[a-z]" "[A-Z]"` ; export OLD_ORACLE_SID
old_oracle_sid=`echo ${OLD_ORACLE_SID} | tr "[A-Z]" "[a-z]"` ; export old_oracle_sid
domain=`echo ${DOMAIN} | tr "A-Z" "[a-z]"` ; export domain
#export ORACLE_HOME="${ORACLE_BASE}/oracle/product/8.0.5" ; export
logged_user=`id | cut -c7-10` ; export logged_user

old_hostname=`echo ${OLD_HOSTNAME} | tr "[A-Z]" "[a-z]"` ; export old_hostname
#
PORT_LISTENER="$TNS_PORT" ; export PORT_LISTENER #Oracle ispeed db listener
PORT_NODEMGR=" " ; export PORT_NODEMGR #iSpeed OAS Node mgr
PORT_ADMINMGR=" " ; export PORT_ADMINMGR #iSpeed OAS admin mgr
PORT_STOREADMIN=" " ; export PORT_STOREADMIN #iSpeed store admin
PORT_STORE=" " ; export PORT_STORE #iSpeed store
PORT_IOTS=" " ; export PORT_IOTS #iSpeed iots
PORT_ISPEED=" " ; export PORT_ISPEED #iSpeed store
#PORT_ORB="16649" ; export #iSpeed ORB
PORT_ORB=" " ; export PORT_ORB #iSpeed ORB
PORT_STOREDEPLOY="storedeploy3" ; export PORT_STOREDEPLOY #16999 #iSpeed store deploy

```

```

PORT_APACHE="${APACHE_BASE}01" ; export PORT_APACHE          #apache3 iSpeed Apache
server
PORT_CAS_CACHEMGR="${APACHE_BASE}06" ; export PORT_CAS_CACHEMGR #vignette CAS Cache mgr
PORT_CAS_PLCMGR="${APACHE_BASE}07" ; export PORT_CAS_PLCMGR    #vignette CAS placement
mgr
PORT_CAS_TPMLMGR="${APACHE_BASE}08" ; export PORT_CAS_TPMLMGR  #vignette CAS template
mgr
PORT_CAS_PAGGEN="${APACHE_BASE}09" ; export PORT_CAS_PAGGEN    #vignette CAS page gener
PORT_CMS_SERVER="${APACHE_BASE}10" ; export PORT_CMS_SERVER    #CMS Server
PORT_VHS_PORT="${APACHE_BASE}11" ; export PORT_VHS_PORT        #Vignette VHS Port
PORT_NETP=" " ; export PORT_NETP                                #Net Perception
CAS_PORT_OLD="$CAS_PORT_OLD" export CAS_PORT_OLD              #old Port needed to delete old
CAS
ORACLE_VGN_BASE_OLD="$ORACLE_VGN_BASE_OLD" ; export ORACLE_VGN_BASE_OLD #old Vignette
directory needed to delete CAS

# Now save settings to summary file for review
echo " " > $SUMMARY_FILE
echo "# Current Settings" >> $SUMMARY_FILE
echo " " >> $SUMMARY_FILE
echo "INSTALL_HOME=$INSTALL_HOME ; export INSTALL_HOME" >> $SUMMARY_FILE
echo "USER_BASE_DIR=$USER_BASE_DIR ; export USER_BASE_DIR" >> $SUMMARY_FILE
echo "ORACLE_SID=$ORACLE_SID ; export ORACLE_SID" >> $SUMMARY_FILE
echo "ORACLE_BASE=$ORACLE_BASE ; export ORACLE_BASE" >> $SUMMARY_FILE
echo "OLD_HOSTNAME=$OLD_HOSTNAME ; export OLD_HOSTNAME" >> $SUMMARY_FILE
echo "old_hostname=$old_hostname ; export old_hostname" >> $SUMMARY_FILE
echo "OLD_ORACLE_SID=$OLD_ORACLE_SID ; export OLD_ORACLE_SID" >> $SUMMARY_FILE
echo "OLD_APACHE_BASE=$OLD_APACHE_BASE ; export OLD_APACHE_BASE" >> $SUMMARY_FILE
echo "TOOLS_DIR=$TOOLS_DIR ; export TOOLS_DIR" >> $SUMMARY_FILE
echo "DB_ROOT_DIR=$DB_ROOT_DIR ; export DB_ROOT_DIR" >> $SUMMARY_FILE
echo "DB_DATA_DIR=$DB_DATA_DIR ; export DB_DATA_DIR" >> $SUMMARY_FILE
echo "ORACLE=$ORACLE ; export ORACLE" >> $SUMMARY_FILE
echo "APACHE=$APACHE ; export APACHE" >> $SUMMARY_FILE
echo "ICS=$ICS ; export ICS" >> $SUMMARY_FILE
echo "NETP=$NETP ; export NETP" >> $SUMMARY_FILE
echo "VIGNETTE=$VIGNETTE ; export VIGNETTE" >> $SUMMARY_FILE
echo "GROUPNAME=$GROUPNAME ; export GROUPNAME" >> $SUMMARY_FILE
echo "BASE_DIR=$BASE_DIR ; export BASE_DIR" >> $SUMMARY_FILE
echo "ORACLE_BASE=$ORACLE_BASE ; export ORACLE_BASE" >> $SUMMARY_FILE
echo "ORACLE_OAS_BASE=$ORACLE_OAS_BASE ; export ORACLE_OAS_BASE" >> $SUMMARY_FILE
echo "ORACLE_OAS_PROD_BASE=$ORACLE_OAS_PROD_BASE ; export ORACLE_OAS_PROD_BASE" >>
$SUMMARY_FILE
echo "OAS_NODE_PORT=$OAS_NODE_PORT ; export OAS_NODE_PORT" >> $SUMMARY_FILE

```

```

echo "OAS_SITE_NAME=$OAS_SITE_NAME ; export OAS_SITE_NAME" >> $SUMMARY_FILE
echo "OAS_SITE_NAME_OLD=$OAS_SITE_NAME_OLD ; export OAS_SITE_NAME_OLD" >> $SUMMARY_FILE
echo "ORACLE_VGN_BASE=$ORACLE_VGN_BASE ; export ORACLE_VGN_BASE" >> $SUMMARY_FILE
echo "ORACLE_VGN_BASE_OLD=$ORACLE_VGN_BASE_OLD ; export ORACLE_VGN_BASE_OLD" >>
$SUMMARY_FILE
echo "ORACLE_AP_BASE=$ORACLE_AP_BASE ; export ORACLE_AP_BASE" >> $SUMMARY_FILE
echo "ORACLE_NP_BASE=$ORACLE_NP_BASE ; export ORACLE_NP_BASE" >> $SUMMARY_FILE
echo "OLD_ORACLE_NP_BASE=$OLD_ORACLE_NP_BASE export OLD_ORACLE_NP_BASE" >> $SUMMARY_FILE
echo "DB_ROOT_DIR=$DB_ROOT_DIR ; export DB_ROOT_DIR" >> $SUMMARY_FILE
echo "DOMAIN=$DOMAIN ; export DOMAIN" >> $SUMMARY_FILE
echo "domain=$domain ; export domain" >> $SUMMARY_FILE
echo "proxyserver=$proxyserver ; export proxyserver" >> $SUMMARY_FILE
echo "proxyport=$proxyport ; export proxyport" >> $SUMMARY_FILE
echo "OAS_NODE=$OAS_NODE ; export OAS_NODE" >> $SUMMARY_FILE
echo "OAS_ADMIN=$OAS_ADMIN ; export OAS_ADMIN" >> $SUMMARY_FILE
echo "NETP_PORT=$NETP_PORT ; export NETP_PORT" >> $SUMMARY_FILE
echo "OAS_BASE=$OAS_BASE ; export OAS_BASE" >> $SUMMARY_FILE
echo "APACHE_BASE=$APACHE_BASE ; export APACHE_BASE" >> $SUMMARY_FILE
echo "OAS_ORB_BASE=$OAS_ORB_BASE ; export OAS_ORB_BASE" >> $SUMMARY_FILE
echo "TNS_PORT=$TNS_PORT ; export TNS_PORT" >> $SUMMARY_FILE
echo "VHS_PORT=$VHS_PORT ; export VHS_PORT" >> $SUMMARY_FILE
echo "HOSTNAME=$HOSTNAME ; export HOSTNAME" >> $SUMMARY_FILE
echo "hostname=$hostname ; export hostname" >> $SUMMARY_FILE
echo "IP_ADDRESS=$IP_ADDRESS ; export IP_ADDRESS" >> $SUMMARY_FILE
echo "ORACLE_SID=$ORACLE_SID ; export ORACLE_SID" >> $SUMMARY_FILE
echo "oracle_sid=$oracle_sid ; export oracle_sid" >> $SUMMARY_FILE
echo "OLD_ORACLE_SID=$OLD_ORACLE_SID ; export OLD_ORACLE_SID" >> $SUMMARY_FILE
echo "old_oracle_sid=$old_oracle_sid ; export old_oracle_sid" >> $SUMMARY_FILE
echo "ORACLE_HOME=$ORACLE_HOME ; export ORACLE_HOME" >> $SUMMARY_FILE
echo "logged_user=$logged_user ; export logged_user" >> $SUMMARY_FILE
echo "INCLUDE_VIGNETTE=$INCLUDE_VIGNETTE ; export INCLUDE_VIGNETTE" >> $SUMMARY_FILE
echo "INSTALL_TYPE=$INSTALL_TYPE ; export INSTALL_TYPE" >> $SUMMARY_FILE
echo "TAR_DIR=$TAR_DIR ; export TAR_DIR" >> $SUMMARY_FILE
echo "ORACLE_TS_FILE=$ORACLETS_FILE ; export ORACLE_TS_FILE" >> $SUMMARY_FILE
echo "ORADATA_FILE=$ORADATA_FILE ; export ORADATA_FILE" >> $SUMMARY_FILE
echo "MIDTIER_FILE=$MIDTIER_FILE ; export MIDTIER_FILE" >> $SUMMARY_FILE
echo "NETP_FILE=$NETP_FILE ; export NETP_FILE" >> $SUMMARY_FILE
echo "APACHE_FILE=$APACHE_FILE ; export APACHE_FILE" >> $SUMMARY_FILE
echo "VIGNETTE_FILE=$VIGNETTE_FILE ; export VIGNETTE_FILE" >> $SUMMARY_FILE
echo "DB_USER_NETP=$DB_USER_NETP ; export DB_USER_NETP" >> $SUMMARY_FILE
echo "DB_PW_NETP=$DB_PW_NETP ; export DB_PW_NETP" >> $SUMMARY_FILE
#
echo "PORT_LISTENER=$PORT_LISTENER ; export PORT_LISTENER" >> $SUMMARY_FILE

```



```

echo "PORT_NODEMGR=$PORT_NODEMGR ; export PORT_NODEMGR" >> $SUMMARY_FILE
echo "PORT_ADMINMGR=$PORT_ADMINMGR ; export PORT_ADMINMGR" >> $SUMMARY_FILE
echo "PORT_STOREADMIN=$PORT_STOREADMIN ; export PORT_STOREADMIN" >> $SUMMARY_FILE
echo "PORT_STORE=$PORT_STORE ; export PORT_STORE" >> $SUMMARY_FILE
echo "PORT_IOTS=$PORT_IOTS ; export PORT_IOTS" >> $SUMMARY_FILE
echo "PORT_ISPEED=$PORT_ISPEED ; export PORT_ISPEED" >> $SUMMARY_FILE
echo "PORT_ORB=$PORT_ORB ; export PORT_ORB" >> $SUMMARY_FILE
echo "PORT_STOREDEPLOY=$PORT_STOREDEPLOY ; export PORT_STOREDEPLOY" >> $SUMMARY_FILE

echo "PORT_APACHE=$PORT_APACHE ; export " >> $SUMMARY_FILE
echo "PORT_CAS_CACHEMGR=$PORT_CAS_CACHEMGR ; export PORT_CAS_CACHEMGR" >> $SUMMARY_FILE
echo "PORT_CAS_PLCMGR=$PORT_CAS_PLCMGR ; export PORT_CAS_PLCMGR" >> $SUMMARY_FILE
echo "PORT_CAS_TPMLMGR=$PORT_CAS_TPMLMGR ; export PORT_CAS_TPMLMGR" >> $SUMMARY_FILE
echo "PORT_CAS_PAGGEN=$PORT_CAS_PAGGEN ; export PORT_CAS_PAGGEN" >> $SUMMARY_FILE
echo "PORT_CMS_SERVER=$PORT_CMS_SERVER ; export PORT_CMS_SERVER" >> $SUMMARY_FILE
echo "PORT_VHS_PORT=$PORT_VHS_PORT ; export PORT_VHS_PORT" >> $SUMMARY_FILE
echo "PORT_NETP=$PORT_NETP ; export PORT_NETP" >> $SUMMARY_FILE
# findme
echo "CAS_PORT_OLD=$CAS_PORT_OLD ; export CAS_PORT_OLD #old Port needed to delete old
CAS" >> $SUMMARY_FILE
echo "ORACLE_VGN_BASE_OLD=$ORACLE_VGN_BASE_OLD ; export ORACLE_VGN_BASE_OLD #old Vignette
directory needed to delete CAS" >> $SUMMARY_FILE

echo "LOGDIR=$LOGDIR ; export LOGDIR" >> $SUMMARY_FILE
echo "STARTUP_LOCATION=$STARTUP_LOCATION ; export STARTUP_LOCATION" >> $SUMMARY_FILE
echo "INSTALL_TYPE=$INSTALL_TYPE ; export INSTALL_TYPE" >> $SUMMARY_FILE
echo INSTALL_LOGFILE=$INSTALL_LOGFILE >> $SUMMARY_FILE
echo SUMMARY_FILE=$SUMMARY_FILE >> $SUMMARY_FILE
echo " "
cat $SUMMARY_FILE
echo " "
#
# =====
# now start installation
# we do loop through until we get a valid response (Y or N) to this question
ans_ok="N"
while [ "$ans_ok" = "N" ]
do
START_INSTALL=Y
echo
echo Answer Y to start install, N to rerun setup, or X to exit.
echo "Start installation using these values (Y/N/X) "
read START_INSTALL

```

```

START_INSTALL=`echo ${START_INSTALL} | tr "a-z" "A-Z"`
if [ "$START_INSTALL" = "Y" ] ; then
    ans_ok="Y"
elif [ "$START_INSTALL" = "N" ] ; then
    ans_ok="Y"
elif [ "$START_INSTALL" = "X" ] ; then
    ans_ok="Y"
    echo "Installation aborted. "
    exit
else
    echo
    echo Please answer Y or N. $START_INSTALL is an invalid response.
    ans_ok="N"
fi
done
#
# Call main installation script or rerun setup
#
if [ "$START_INSTALL" = "Y" ] ; then
    . $INSTALL_HOME/main.sh
else
    . $INSTALL_HOME/setup.sh
fi

$INSTALL_HOME/echodbg.sh "`date` setup.sh completed." 2

```

```

#!/bin/ksh
# Filename:      unTar
# Description:   Shell script to copy the TAR files from the TAR_DIR to the
#               TOOLS_DIR and expand them.
#
# Written by:   Bob Wessa 9/13/1999
#               Northeast eBusiness Center
#               Oracle Corporation
#
# Revision History
# Date          Who          Why
# 2/7/2000 rwessa   Updated for iPrototype Phase II
#               Add ability to untar only certain pieces
# =====
echo " entering unTar.sh ..."
echo "Untarring files for install_type=$INSTALL_TYPE"
echo
echo "TAR file directory: " $TAR_DIR
echo " Install Source directory:          $TAR_DIR "
echo " Target Base directory:              $BASE_DIR "
echo " Target DataBase file root directory: $DB_ROOT_DIR "
echo " Target DataBase file directory:     $DB_DATA_DIR "
#
echo ORACLE_BASE=$ORACLE_BASE
echo ORACLE_OAS_BASE=$ORACLE_OAS_BASE
echo ORACLE_VGN_BASE=$ORACLE_VGN_BASE
echo DB_ROOT_DIR=$DB_ROOT_DIR
#

# INSTALL_TYPE=D =====
#
if [ "$INSTALL_TYPE" = "D" ] ; then
. $INSTALL_HOME/unTar_db.sh
# end of if $INSTALL_TYPE=D
fi

#
# INSTALL_TYPE=I =====
#
if [ "$INSTALL_TYPE" = "I" ] ; then

```

```

. $INSTALL_HOME/unTar_i.sh
# end of if $INSTALL_TYPE=I
fi

#
# INSTALL_TYPE=V =====
#
if [ "$INSTALL_TYPE" = "V" ] ; then
. $INSTALL_HOME/unTar_vgn.sh
# end of if $INSTALL_TYPE=V
fi

#
# INSTALL_TYPE=F =====
#
if [ "$INSTALL_TYPE" = "F" ] ; then
. $INSTALL_HOME/unTar_db.sh
. $INSTALL_HOME/unTar_i.sh
. $INSTALL_HOME/unTar_vgn.sh
# end of if $INSTALL_TYPE=F
fi

```

```
#!/bin/ksh
# Filename          install_db.sh
# Author            RWessa
# Date              2/7/2000
# Description        Main installation script for iPrototype
#                   Called be setup, which prompts for proper
#                   user input.
# Parameters None
# Usage             This scripts SHOULD NOT be called directly.
#                   Instead, you should call setup, answer
#                   the necessary questions, and let setup
#                   call this script.
#
# =====
# Revision History
# Date              Who              Why
# 01/31/2000  rwessa      Initial create date
#
# =====
# *****
# Do not edit this file.
# *****

$INSTALL_HOME/echodbg.sh " entering install_db.sh ..." 2
$INSTALL_HOME/echodbg.sh " " 2

if [ "$INSTALL_TYPE" = "D" ] || [ "$INSTALL_TYPE" = "F" ] ; then
    $INSTALL_HOME/echodbg.sh " starting database install for INSTALL_TYPE=$INSTALL_TYPE ..."

    $INSTALL_HOME/echodbg.sh "Running scripts to untar database files" 2
    $INSTALL_HOME/unTar_db.sh

    # $INSTALL_HOME/echodbg.sh ""
    # $INSTALL_HOME/echodbg.sh "Running scripts to create links needed for proper operation"
    #. $INSTALL_HOME/setLinks_db.sh

    $INSTALL_HOME/echodbg.sh "Creating database user $ORACLE. Be sure to set the password."
4
    $INSTALL_HOME/echodbg.sh ""
    . $INSTALL_HOME/createUsers_db.sh
```

```

# $INSTALL_HOME/echodbg.sh "Removing old SCCS files"
# $INSTALL_HOME/echodbg.sh " "
#. $INSTALL_HOME/fixSCCS.sh

$INSTALL_HOME/echodbg.sh " " 4
$INSTALL_HOME/echodbg.sh "Set file ownership to the proper users" 4
. $INSTALL_HOME/setOwners_db.sh

$INSTALL_HOME/echodbg.sh "Create the oratab entry ..." 4
$INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/setOratab.sh

$INSTALL_HOME/echodbg.sh "Create initialization scripts" 4
$INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/setInit.sh

$INSTALL_HOME/echodbg.sh "Set tnsnames.ora and listener.ora parameters" 4
$INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/setNet_db.sh

$INSTALL_HOME/echodbg.sh "Configure the database and rebuild the control files" 4
$INSTALL_HOME/echodbg.sh "Ignore copy error messages if file is being moved to the same
location" 4
$INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/configureDB.sh

# $INSTALL_HOME/echodbg.sh "Shutdown database"
# $INSTALL_HOME/echodbg.sh " "
#su - ${ORACLE} -c "stopDB${oracle_sid}"
#su - ${ORACLE} -c "stopNET${oracle_sid}"
#read ans?"hit enter to continue "

# $INSTALL_HOME/echodbg.sh "Clean up the file system"
# $INSTALL_HOME/echodbg.sh " "
#. $INSTALL_HOME/cleanupScripts.sh
#read ans?"hit enter to continue "

# $INSTALL_HOME/echodbg.sh "Startup ispeed instance"
# $INSTALL_HOME/echodbg.sh " "
#/etc/rc3.d/S90${oracle_sid}
#read ans?"hit enter to continue "

```

```

# $INSTALL_HOME/echodbg.sh "Ports used by this instance ${oracle_sid}" >
$TOOLS_DIR/${oracle_sid}ports
# $INSTALL_HOME/echodbg.sh "OAS Node $OAS_NODE" >> $TOOLS_DIR/${oracle_sid}ports
# $INSTALL_HOME/echodbg.sh "OAS Admin $OAS_ADMIN" >> $TOOLS_DIR/${oracle_sid}ports
# $INSTALL_HOME/echodbg.sh "NetP $NETP_PORT" >> $TOOLS_DIR/${oracle_sid}ports
# $INSTALL_HOME/echodbg.sh "OAS Base $OAS_BASE" >> $TOOLS_DIR/${oracle_sid}ports
# $INSTALL_HOME/echodbg.sh "Apache Base $APACHE_BASE" >> $TOOLS_DIR/${oracle_sid}ports
# $INSTALL_HOME/echodbg.sh "OAS ORB Base $OAS_ORB_BASE" >> $TOOLS_DIR/${oracle_sid}ports
# $INSTALL_HOME/echodbg.sh "TNS Listener $TNS_PORT" >> $TOOLS_DIR/${oracle_sid}ports

# $INSTALL_HOME/echodbg.sh "change passwords"
# $INSTALL_HOME/echodbg.sh " "
#. $INSTALL_HOME/setPasswords.sh

fi

```

```

#!/bin/ksh
# Filename      install_full.sh
# Author        RWessa
# Date          2/7/2000
# Description    installation script for iPrototype
#               Called by main, and installs all components
#               of iPrototype on the same machine.
#
# Parameters    None
# Usage         This script SHOULD NOT be called directly.
#               Instead, you should call setup, answer
#               the necessary questions, and let setup
#               call main which calls this script.
#               This script will in turn call the installation
#               script for each iPrototype component.
#
# =====
#
#
# *****
# Do not edit this file.
# *****

. $INSTALL_HOME/echodbg.sh " entering install_full.sh ..."

if [ "$INSTALL_TYPE" = "F" ] ; then
. $INSTALL_HOME/echodbg.sh " starting install for INSTALL_TYPE=F ..."
echo "Performing full installation procedure ..."

. $INSTALL_HOME/install_db.sh
. $INSTALL_HOME/install_i.sh
. $INSTALL_HOME/install_vgn.sh
else
echo "install_full.sh was called incorrectly: INSTALL_TYPE=$INSTALL_TYPE"
fi
exit

```



```

#!/bin/ksh
# Filename      install_i.sh
# Author       RWessa
# Date        2/7/2000
# Description   Main installation script for iPrototype
#              components iStore, OAS, and iMarketing and
#              Net Perceptions.
#              Called by setup->main.
#              which prompts for proper user input.
# Parameters   None
# Usage        This scripts SHOULD NOT be called directly.
#              Instead, you should call setup, answer
#              the necessary questions, and let this
#              script be called
#
# =====
#
#
#
# *****
# Do not edit this file.
# *****

$INSTALL_HOME/echodbg.sh " entering install_i.sh ..." 1

if [ "$INSTALL_TYPE" = "I" ] || [ "$INSTALL_TYPE" = "F" ] ; then
    $INSTALL_HOME/echodbg.sh "Performing iStore/OAS/iMarketing install for
INSTALL_TYPE=$INSTALL_TYPE ..." 2

$INSTALL_HOME/echodbg.sh "Running scripts to untar middle tier setup files" 4
. $INSTALL_HOME/unTar_i.sh

$INSTALL_HOME/echodbg.sh "Running scripts to create links needed for proper operation" 4
. $INSTALL_HOME/setLinks_i.sh

$INSTALL_HOME/echodbg.sh "Running createUsers_i.sh ..." 4
. $INSTALL_HOME/createUsers_i.sh

$INSTALL_HOME/echodbg.sh "running setOwners_i.sh" 4
. $INSTALL_HOME/setOwners_i.sh

```



```

#!/bin/ksh
# Filename:          unTar_db.sh
# Description:       Shell script to unTar complete database (datafiles and code)
#
# Written by:        Bob Wessa 9/13/1999
#                    Northeast eBusiness Center
#                    Oracle Corporation
#
# Revision History
# Date      Who      Why
# 2/7/2000   rwessa   Updated for iPrototype Phase II
#                    Add ability to untar only certain pieces
# 8/27/2000 rwessa   modified to use zcat command instead of tar -z option
# =====

#
# INSTALL_TYPE=D =====
#
echo " entering unTar_db.sh ..."
date
date > $LOGDIR/unTar_db.log

if [ "$INSTALL_TYPE" = "D" ] || [ "$INSTALL_TYPE" = "F" ] ; then

# make sure proper directories exist
if [ -s "$BASE_DIR" ]
then
    echo "The directory $BASE_DIR already exists."
else
    echo " $BASE_DIR will be created."
    mkdir -p $BASE_DIR
# exit 2
fi

if [ -s "$DB_DATA_DIR" ]
then
    echo "The directory $DB_DATA_DIR already exists."
else
    echo " $DB_DATA_DIR will be created."
    mkdir -p $DB_DATA_DIR
#exit 3
fi

```

```

if [ -s "$ORACLE_BASE" ]
then
    echo "The directory $ORACLE_BASE already exists."
else
    echo " $ORACLE_BASE will be created."
    mkdir -p $ORACLE_BASE
# exit 2
fi

echo "untarring db files $TAR_DIR/$ORADATA_FILE to ${DB_DATA_DIR} ..."
cd ${DB_DATA_DIR}
pwd >> $LOGDIR/unTar_db.log
echo "untarring tar -xvzf $TAR_DIR/$ORADATA_FILE" >> $LOGDIR/unTar_db.log
#use zcat command instead of tar -z which does not always work
#tar -xvzf $TAR_DIR/$ORADATA_FILE >> $LOGDIR/unTar_db.log
zcat $TAR_DIR/$ORADATA_FILE | tar -xvf - >>$LOGDIR/unTar_db.log

echo "untarring Oracle technology file ${TAR_DIR}/${ORACLETS_FILE} to ${ORACLE_BASE}..."

cd ${ORACLE_BASE}
pwd >> $LOGDIR/unTar_db.log
echo "untarring tar -xvzf ${TAR_DIR}/${ORACLETS_FILE}" >> $LOGDIR/unTar_db.log
#use zcat command instead of tar -z which does not always work
#tar -xvzf ${TAR_DIR}/${ORACLETS_FILE} >> $LOGDIR/unTar_db.log
zcat ${TAR_DIR}/${ORACLETS_FILE} | tar -xvf - >> $LOGDIR/unTar_db.log
#
# end of if $INSTALL_TYPE=D

fi

```

```
#!/bin/ksh
# Filename:      unTar_vgn.sh
# Description: Shell script to unTar Vignette code and Apache listener
#               Vignette requires Apache and therefore these two products
#               are handled together.
#
# Written by:      Bob Wessa 9/13/1999
#                  Norhteast eBusiness Center
#                  Oracle Corporation
#
#
# Revision History
# Date      Who      Why
# 2/7/2000 rwessa    Updated for iPrototype Phase II
#                  Add ability to untar only certain pieces
# 8/27/2000 rwessa    modified to use zcat command instead of tar -z option
# =====

echo " entering unTar_vgn.sh ..."
date
date > $LOGDIR/unTar_vgn.log

# INSTALL_TYPE=V =====
# Vignette and Apache must be installed together

if [ "$INSTALL_TYPE" = "V" ] || [ "$INSTALL_TYPE" = "F" ] ; then

# make sure proper directories exist

# check the existence of the base Vignette directory and create if needed
if [ -s "$ORACLE_VGN_BASE" ]
then
    echo "The directory $ORACLE_VGN_BASE already exists."
else
    echo " $ORACLE_VGN_BASE will be created."
    mkdir -p $ORACLE_VGN_BASE
    #exit 3
fi

# check the existence of the base Apache directory and create if needed
if [ -s "$ORACLE_AP_BASE" ]
then
    echo "The directory $ORACLE_AP_BASE already exists."
```

```

else
    echo " $ORACLE_AP_BASE will be created."
    mkdir -p $ORACLE_AP_BASE
    #exit 3
fi

echo "Untarring files for install_type=$INSTALL_TYPE"
echo
echo " TAR file directory:          $STAR_DIR"
echo " Install Source directory:    $INSTALL_HOME"
echo " Vignette source TAR file:    $VIGNETTE_FILE "
echo " Apache source TAR file:      $APACHE_FILE "
echo " Target Vignette Base directory: $ORACLE_VGN_BASE"
echo " Target Apache Base directory:  $ORACLE_AP_BASE"

# extract Vignette
echo "untarring Vignette file $VIGNETTE_FILE to ${ORACLE_VGN_BASE} ..."
cd ${ORACLE_VGN_BASE}
pwd >> $LOGDIR/unTar_vgn.log
echo "untarring tar -xvzf $STAR_DIR/$VIGNETTE_FILE" >> $LOGDIR/unTar_vgn.log

#use zcat command instead of tar -z which does not always work
#tar -xvzf $STAR_DIR/$VIGNETTE_FILE >> $LOGDIR/unTar_vgn.log
zcat $STAR_DIR/$VIGNETTE_FILE | tar -xvf - >> $LOGDIR/unTar_vgn.log

# extract Apache
echo "untarring Apache file ${TAR_DIR}/${APACHE_FILE} to ${ORACLE_AP_BASE} ..."
cd ${ORACLE_AP_BASE}
pwd >> $LOGDIR/unTar_vgn.log
echo "untarring tar -xvzf ${TAR_DIR}/${APACHE_FILE}" >> $LOGDIR/unTar_vgn.log

#use zcat command instead of tar -z which does not always work
#tar -xvzf ${TAR_DIR}/${APACHE_FILE} >> $LOGDIR/unTar_vgn.log
zcat ${TAR_DIR}/${APACHE_FILE} | tar -xvf - >> $LOGDIR/unTar_vgn.log

#
# end of if $INSTALL_TYPE=V
fi

```

```

#!/bin/ksh
#
# Routine to setup the oratab files for iStore
#
#           Oracle Corporation

if [ -a /var/opt/oracle/oratab ]
then
    if [ `grep -ci "$ORACLE_SID:" /var/opt/oracle/oratab` -eq 0 ]
    then
        echo "$ORACLE_SID:$ORACLE_HOME:Y" >> /var/opt/oracle/oratab
    else
        echo " "
        grep -i "$ORACLE_SID:" /var/opt/oracle/oratab
        echo "WARNING: The /var/opt/oracle/oratab already contains the above entry for "
        echo "..... this instance. Verify that the oratab file is the correct. "
        echo " "
    fi
else
    mkdir /var/opt/oracle
    echo "$oracle_sid:$ORACLE_HOME:Y" > /var/opt/oracle/oratab
fi
chgrp $GROUPNAME /var/opt/oracle/oratab
chmod 664 /var/opt/oracle/oratab

```

```

#!/bin/ksh
#
# Routine to setup the listener and tnsnames files for iStore
#
# Written by: Lane Findley 8/1/99
#           Oracle Corporation

# #####
# Date      Who      Why
# 2/10/2000  rwessa   Modified to use new variables for iPrototype
#                               Phase II
#
# #####
echo " "
echo " A listener.ora file is being created. If you have more"
echo " than one database on the system, check the listener.ora"
echo " file for accuracy."
echo " "

cat << EOF > /tmp/listener.ora
${ORACLE_SID} =
  (ADDRESS_LIST =
    (ADDRESS= (PROTOCOL= IPC) (KEY= ${ORACLE_SID}))
    (ADDRESS= (PROTOCOL= TCP) (Host= ${hostname}) (Port= ${TNS_PORT}))
  )
SID_LIST_${ORACLE_SID} =
  (SID_LIST =
    (SID_DESC =
      (ORACLE_HOME= ${ORACLE_HOME})
      (SID_NAME = ${ORACLE_SID})
    )
    (SID_DESC =
      (SID_NAME = extproc)
      (ORACLE_HOME = ${ORACLE_HOME})
      (PROGRAM = extproc)
    )
  )

EOF

cp /tmp/listener.ora "${ORACLE_HOME}/network/admin/listener.ora"

cat << EOF > "${ORACLE_HOME}/network/admin/tnsnames.ora"

```



```

extproc_connection_data =
(DESCRIPTION =
  (ADDRESS = (PROTOCOL = IPC) (KEY = ${oracle_sid}))
  (CONNECT_DATA = (SID = extproc))
)
${oracle_sid} =
(DESCRIPTION =
  (ADDRESS = (PROTOCOL= TCP) (Host= ${hostname}.${domain}) (Port= ${TNS_PORT}))
  (CONNECT_DATA = (SID = ${oracle_sid}))
)
${oracle_sid}_BEQ =
(DESCRIPTION =
  (ADDRESS = (PROTOCOL = BEQ) (PROGRAM = ${ORACLE_HOME})
    (argv0 = oracle${oracle_sid})
    (args = '(DESCRIPTION = (LOCAL=YES) (ADDRESS=(PROTOCOL=BEQ)))')
    (envs = 'ORACLE_HOME=${ORACLE_HOME},ORACLE_SID=${oracle_sid}')
  )
)
)

EOF

# create links so that there is only one set of tnsnames.ora and listener.ora files

#rm "$TOOLS_DIR/oracle/product/ics/network/admin/listener.ora"
#rm "$TOOLS_DIR/oracle/product/ics/network/admin/tnsnames.ora"

#ln -s \
# "$TOOLS_DIR/oracle/product/8.0.5/network/admin/listener.ora" \
# "$TOOLS_DIR/oracle/product/ics/network/admin/listener.ora"
#ln -s \
# "$TOOLS_DIR/oracle/product/8.0.5/network/admin/tnsnames.ora" \
# "$TOOLS_DIR/oracle/product/ics/network/admin/tnsnames.ora"

```

```

#!/bin/ksh
# Filename:      unTar_i.sh
# Description: Shell script to unTar OAS, iStore and IMarketing
#
# Written by:      Bob Wessa 9/13/1999
#                  Northeast eBusiness Center
#                  Oracle Corporation
#
# Revision History
# Date           Who           Why
# 2/7/2000      rwessa         Updated for iPrototype Phase II
#                  Add ability to untar only certain pieces
# 8/27/2000 rwessa  modified to use zcat command instead of tar -z option
# =====
#
# INSTALL_TYPE=I =====
#
$INSTALL_HOME/echodbg.sh "`date` entering unTar_i.sh " 1

if [ "$INSTALL_TYPE" = "I" ] || [ "$INSTALL_TYPE" = "F" ] ; then
$INSTALL_HOME/echodbg.sh "Untarring Middle Tier files for install_type=$INSTALL_TYPE" 2

$INSTALL_HOME/echodbg.sh " Tar File Source directory:          $STAR_DIR " 2
$INSTALL_HOME/echodbg.sh " Source TAR file:                  $MIDTIER_FILE " 2
$INSTALL_HOME/echodbg.sh " Target OAS and iStore Destination directory:
$ORACLE_OAS_BASE" 2
$INSTALL_HOME/echodbg.sh " Target NP Destination directory:  $ORACLE_NP_BASE" 2
#

if [ -s "$ORACLE_OAS_BASE" ]
then
$INSTALL_HOME/echodbg.sh "The directory $ORACLE_OAS_BASE already exists and will be
used." 2
else
$INSTALL_HOME/echodbg.sh " $ORACLE_OAS_BASE will be created." 2
mkdir -p $ORACLE_OAS_BASE
# exit 2
fi

#
if [ -s "$ORACLE_NP_BASE" ]

```

```

then
    $INSTALL_HOME/echodbg.sh "The directory $ORACLE_NP_BASE already exists and will be
used." 2
else
    $INSTALL_HOME/echodbg.sh " $ORACLE_NP_BASE will be created." 2
    mkdir -p $ORACLE_NP_BASE
fi

$INSTALL_HOME/echodbg.sh "untarring middle tier files ${TAR_DIR}/${MIDTIER_FILE} to
$ORACLE_OAS_BASE ..." 2
cd $ORACLE_OAS_BASE
$INSTALL_HOME/echodbg.sh "pwd=`pwd`" 1
$INSTALL_HOME/echodbg.sh "untarring tar -xvzf $TAR_DIR/$MIDTIER_FILE" 1

#use zcat command instead of tar -z which does not always work
#tar -xvzf $TAR_DIR/$MIDTIER_FILE >> $LOGDIR/unTar_i.log
zcat $TAR_DIR/$MIDTIER_FILE | tar -xvf - >> $LOGDIR/unTar_i.log

$INSTALL_HOME/echodbg.sh "untarring NetP files ${TAR_DIR}/${NETP_FILE} to
$ORACLE_NP_BASE ..." 1
cd $ORACLE_NP_BASE
$INSTALL_HOME/echodbg.sh "pwd=`pwd`" 1
$INSTALL_HOME/echodbg.sh "untarring tar -xvzf $TAR_DIR/$NETP_FILE" 1

#use zcat command instead of tar -z which does not always work
#tar -xvzf $TAR_DIR/$NETP_FILE >> $LOGDIR/unTar_i.log
zcat $TAR_DIR/$NETP_FILE | tar -xvf - >> $LOGDIR/unTar_i.log

fi

```

```

#!/bin/ksh
# Filename      check_ports.sh
# Author        RWessa
# Date          2/7/2000
# Description    Scvript to check availability of ports for iPrototype setup.
#               Called by setup, which prompts for proper
#               user input.
# Parameters    None
# Usage          This scripts SHOULD NOT be called directly.
#               Instead, you should call setup, answer
#               the necessary questions, and let setup
#               call this script.
#
# =====
#
#
#
# *****
# Do not edit this file.
# *****

for i in `netstat -a |grep $hostname | cut -f5 -d. | cut -f1 -d" "`
do
if [ $OAS_NODE = $i ]
then
echo OAS_NODE $i port is already in use
#exit
elif [ $OAS_ADMIN = $i ]
then
echo OAS_ADMIN $i port is already in use
#exit
elif [ ${OAS_BASE}000 = $i ]
then
echo OAS_BASE $i port is already in use
#exit
elif [ ${APACHE_BASE}201 = $i ]
then
echo APACHE_BASE $i port is already in use
#exit
elif [ ${OAS_ORB_BASE}49 = $i ]
then

```

```

echo OAS_ORB_BASE $i port is already in use
#exit
elif [ $TNS_PORT = $i ]
then
echo TNS_PORT $i port is already in use
#exit
fi
done

for i in `netstat -a | grep LISTEN|cut -f2 -d.| cut -f1 -d" "`
do
if [ $OAS_NODE = $i ]
then
echo OAS_NODE $i port is already in use
#exit
elif [ $OAS_ADMIN = $i ]
then
echo OAS_ADMIN $i port is already in use
#exit
elif [ ${OAS_BASE}000 = $i ]
then
echo OAS_BASE $i port is already in use
#exit
elif [ ${APACHE_BASE}201 = $i ]
then
echo APACHE_BASE $i port is already in use
#exit
elif [ ${OAS_ORB_BASE}49 = $i ]
then
echo OAS_ORB_BASE $i port is already in use
#exit
elif [ $TNS_PORT = $i ]
then
echo TNS_PORT $i port is already in use
#exit
fi
done

```

```
#!/bin/ksh
# Filename          check_access.sh
# Author            RWessa
# Date              2/7/2000
# Description        Script called my main setup script for iPrototype.
#                   Verifies that we have root access.
# Parameters None
# Usage             This scripts SHOULD NOT be called directly.
#                   Instead, you should call setup, answer
#                   the necessary questions, and let setup
#                   call this script.
#
# =====
# Revision History
# Date              Who              Why
# 02/11/2000  rwessa      Initial create date
#
# =====
# *****
# Do not edit this file.
# *****

# First run some necessary checks on the answers to the questions
echo
echo "Checking for proper user privileges ..."
export logged_user=`id | cut -c7-10`
if [ $logged_user = 'root' ]
then
echo "You are running this script as root"
else
echo "You must run this script as root "
exit
fi
```

```

#!/bin/ksh
# Filename      check_sid.sh
# Author        RWessa
# Date          2/7/2000
# Description    Script called my main setup script for iPrototype.
#               Verifies that we are not using the same ORACLE_SID which
#               the iPrototype was initially developed under.
# Parameters    None
# Usage          This scripts SHOULD NOT be called directly.
#               Instead, you should call setup, answer
#               the necessary questions, and let setup
#               call this script.
#
# =====
# Revision History
# Date          Who          Why
# 02/11/2000    rwessa        Initial create date
#
# =====
#
# *****
# Do not edit this file.
# *****

# First run some necessary checks on the answers to the questions
echo
echo "Checking for duplicate ORACLE_SID usage ..."
if [ $oracle_sid = "$OLD_ORACLE_SID" ]
then
echo "Please do not use $ORACLE_SID as the Oracle SID"
exit
fi

```



```

# LOGFILE is defined in setup.sh
#LOGFILE=/usr/local/maint/setupii/setup.log
#export LOGFILE
echo
echo Current Settings
echo ORACLE_SID=$ORACLE_SID >> $LOGFILE
echo ORACLE_BASE=$ORACLE_BASE
echo TOOLS_OLD_DIR=$TOOLS_OLD_DIR
echo OLD_HOSTNAME=$OLD_HOSTNAME
echo OLD_ORACLE_SID=$OLD_ORACLE_SID
echo OLD_APACHE_BASE=$OLD_APACHE_BASE
echo TOOLS_DIR=$TOOLS_DIR
echo DB_DIR=$DB_DIR
echo ORACLE=$ORACLE
echo APACHE=$APACHE
echo ICS=$ICS
echo VIGNETTE=$VIGNETTE
echo ORACLE_BASE=$ORACLE_BASE
echo ORACLE_OAS_BASE=$ORACLE_OAS_BASE
echo ORACLE_VGN_BASE=$ORACLE_VGN_BASE
echo DB_ROOT_DIR=$DB_ROOT_DIR
echo DOMAIN=$DOMAIN
echo proxyserver=$proxyserver
echo proxyport=$proxyport
echo OAS_NODE=$OAS_NODE
echo OAS_ADMIN=$OAS_ADMIN
echo NETP_PORT=$NETP_PORT
echo OAS_BASE=$OAS_BASE
echo APACHE_BASE=$APACHE_BASE
echo OAS_ORB_BASE=$OAS_ORB_BASE
echo TNS_PORT=$TNS_PORT
echo VHS_PORT=$VHS_PORT
echo HOSTNAME=$HOSTNAME
echo hostname=$hostname
echo IP_ADDRESS=$IP_ADDRESS
echo ORACLE_SID=$ORACLE_SID
echo oracle_sid=$oracle_sid
echo OLD_ORACLE_SID=$OLD_ORACLE_SID
echo old_oracle_sid=$old_oracle_sid
echo domain=$domain
echo ORACLE_HOME=$ORACLE_HOME
echo logged_user=$logged_user
echo INCLUDE_VIGNETTE=$INCLUDE_VIGNETTE

```



```

#!/bin/ksh
#
# Routine to setup NetPerceptions for iSpeed
#
# Written by: Lane Findley 8/1/99
#           Oracle Corporation
#
# =====
# Revision History
#
# 03-09-2000 rwessa Modified to work for iPrototype 2
#           Updated to use new variables
# =====

. $INSTALL_HOME/echodbg.sh "entering configureNetp.sh"

netp_source=$INSTALL_HOME/templates/netp
netp_dest="$ORACLE_NP_BASE"

. $INSTALL_HOME/echodbg.sh "netp_dest: $netp_dest"
. $INSTALL_HOME/echodbg.sh "netp_source: $netp_source"

rm "$netp_dest/iona/ImpRep/NS.imp"

. $INSTALL_HOME/echodbg.sh "configuring $netp_dest/config/S98orb"
cat "$netp_source/S98orb" | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+g \
    > "$netp_dest/config/S98orb"

. $INSTALL_HOME/echodbg.sh "configuring $netp_dest/config/S99netp"
cat "$netp_source/S99netp" | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+g \
    > "$netp_dest/config/S99netp"

. $INSTALL_HOME/echodbg.sh "configuring $netp_dest/config/env.cfg"
cat "$netp_source/env.cfg" | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g | cat | \
    sed "s+N_E_T_P_P_O_R_T+${NETP_PORT}+g | cat | \
    sed "s+N_P_D_B_U_S_E_R+${DB_USER_NETP}+g | cat | \
    sed "s+N_P_D_B_P_A_S_S+${DB_PW_NETP}+g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+g \
    > "$netp_dest/config/env.cfg"

```

```

. $INSTALL_HOME/echodbg.sh "configuring $netp_dest/config/shprofile"
cat "$netp_source/cshprofile" | \
    sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+\"g \
> "${netp_dest}/config/cshprofile"

. $INSTALL_HOME/echodbg.sh "configuring $netp_dest/config/shprofile"
cat "$netp_source/shprofile" | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+\"g \
> "$netp_dest/config/shprofile"

. $INSTALL_HOME/echodbg.sh "configuring $netp_dest/iona/Orbix.cfg"
cat "$netp_source/Orbix.cfg" | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+\"g | cat | \
    sed "s+N_E_T_P_P_O_R_T+${NETP_PORT}+\"g | cat | \
    sed "s+D_O_M_A_I_N+${DOMAIN}+\"g \
> "$netp_dest/iona/Orbix.cfg"

. $INSTALL_HOME/echodbg.sh "configuring $netp_dest/iona/OrbixWeb.properties"
cat "$netp_source/OrbixWeb.properties" | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+\"g | cat | \
    sed "s+D_O_M_A_I_N+${DOMAIN}+\"g | cat | \
    sed "s+N_E_T_P_P_O_R_T+${NETP_PORT}+\"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g \
> "$netp_dest/iona/OrbixWeb.properties"

. $INSTALL_HOME/echodbg.sh "configuring $netp_dest/iona/Locator/Orbix.hosts"
cat "$netp_source/Orbix.hosts" | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
    sed "s+D_O_M_A_I_N+${DOMAIN}+\"g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+\"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g \
> "$netp_dest/iona/Locator/Orbix.hosts"

. $INSTALL_HOME/echodbg.sh "configuring $USER_BASE_DIR/${NETP}/update_netp.sql"
cat "$netp_source/update_netp.sql" | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+\"g | cat | \

```



```

#!/bin/ksh
echo "Attempting to run svrmgr to update Netp tables..."
#su - ${ORACLE} -c "
#ORACLE_SID=${ORACLE_SID}
#ORAENV_ASK=NO
#cat "${DB_DIR}/oradata/${oracle_sid}/cr${oracle_sid}ctrl.sql" | svrmgrl
#"
su - ${ORACLE} -c "
svrmgrl << EOF
connect internal
startup
connect D_B_U_S_E_R_N_E_T_P/D_B_P_W_N_E_T_P
@$USER_BASE_DIR/${NETP}/update_netp.sql
"
exit
EOF

```

```

#!/bin/ksh
# Filename: configureApache.sh
#
# Description:
#
#           Reconfigures the Apache listener for iPrototype
#           Once done, this script will start Apache by calling
#           the startApache script just created. Apache
#           must be up for the Vignette reconfiguration script
#           to work properly.
#
# =====
# Revision History
# Date      Who      Why
# 03/07/2000 rwessa   Created for iPrototype Version 2
# =====
#
. $INSTALL_HOME/echodbg.sh "entering configureApache.sh " 2

grep loghost /etc/hosts
if [ "$?" = 1 ] ; then

. $INSTALL_HOME/echodbg.sh "WARNING: You hosts file must have the following type of
entry" 2
. $INSTALL_HOME/echodbg.sh "..... ${IP_ADDRESS}    ${hostname}.${DOMAIN} ${hostname}
loghost" 2
. $INSTALL_HOME/echodbg.sh "....." 2
. $INSTALL_HOME/echodbg.sh "..... Without this entry, httpd will not start." 2
. $INSTALL_HOME/echodbg.sh "..... You must make this entry and restart the
installation." 5
exit
fi

apache_source=$INSTALL_HOME/templates/apache
apache_dest="$ORACLE_AP_BASE/conf"

. $INSTALL_HOME/echodbg.sh "Updating ${apache_dest}/access.conf" 4
cat "$apache_source/access.conf" | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+g | cat | \
sed "s+D_O_M_A_I_N+${domain}+g | cat | \
sed "s+O_R_A_C_L_E_A_P_B_A_S_E+${ORACLE_AP_BASE}+g | cat | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+g \
> "${apache_dest}/access.conf"

```

```

. $INSTALL_HOME/echodbg.sh "Updating ${apache_dest}/srm.conf" 4
cat "$apache_source/srm.conf" | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+O_R_A_C_L_E_A_P_B_A_S_E+${ORACLE_AP_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+\"g \
    > "${apache_dest}/srm.conf"

. $INSTALL_HOME/echodbg.sh "Updating ${apache_dest}/httpd.conf" 4
cat "$apache_source/httpd.conf" | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+O_R_A_C_L_E_A_P_B_A_S_E+${ORACLE_AP_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+\"g | cat | \
    sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+\"g \
    > "${apache_dest}/httpd.conf"

. $INSTALL_HOME/echodbg.sh "Updating ${apache_dest}/../sbin/apachectl" 4
cat "$apache_source/apachectl" | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+O_R_A_C_L_E_A_P_B_A_S_E+${ORACLE_AP_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+\"g \
    > "${apache_dest}/../sbin/apachectl"

. $INSTALL_HOME/echodbg.sh "Updating ${apache_dest}/../sbin/apxs" 4
cat "$apache_source/apxs" | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+O_R_A_C_L_E_A_P_B_A_S_E+${ORACLE_AP_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+\"g \
    > "${apache_dest}/../sbin/apxs"

. $INSTALL_HOME/echodbg.sh "Starting apache..." 2
su - ${APACHE} -c "startApache"
echo " listing apache processes, should see httpd listener started." >> $INSTALL_LOGFILE
ps -ef | grep $APACHE >> $INSTALL_LOGFILE
. $INSTALL_HOME/echodbg.sh "configureApache.sh completed." 2

```



```
#!/bin/ksh
# Filename: fixSCCS.sh
#
# This script calls the appropriate script to remove dangling links
# for SCCS embedded in the directories.
```

```
. $INSTALL_HOME/fixSCCS_full.sh
```

```

#!/bin/ksh
# Filename          main.sh
# Author            RWessa
# Date              2/7/2000
# Description        Main installation script for iPrototype
#                   Called be setup, which prompts for proper
#                   user input.
# Parameters None
# Usage              This scripts SHOULD NOT be called directly.
#                   Instead, you should call setup, answer
#                   the necessary questions, and let setup
#                   call this script.
#
# =====
# Revision History
# Date              Who              Why
# 01/31/2000  rwessa          Initial create date
#
# =====
# *****
# Do not edit this file.
# *****

#echo "Checking for proper user privileges ..."
#. $INSTALL_HOME/check_access.sh

#echo "Checking for duplicate ORACLE_SID ..."
#. $INSTALL_HOME/check_sid.sh

#echo "checking availability of port numbers chosen ..."
#. $INSTALL_HOME/check_ports

#echo "Review environment variable setup ..."
. $INSTALL_HOME/check_setup.sh

if [ "$INSTALL_TYPE" = "F" ] ; then
. $INSTALL_HOME/install_full.sh
fi

if [ "$INSTALL_TYPE" = "D" ] ; then
. $INSTALL_HOME/install_db.sh
fi

```

```
if [ "$INSTALL_TYPE" = "V" ] ; then
. $INSTALL_HOME/install_vgn.sh
fi

if [ "$INSTALL_TYPE" = "I" ] ; then
. $INSTALL_HOME/install_i.sh
fi

$INSTALL_HOME/echodbg.sh "`date` main.sh completed." 2
```

```

#!/bin/ksh
#
# Filename: setNet_i.sh
# Author:   rwessa
#          Oracle Corporation
# Description:
#          This file will create the tnsnames.ora and listener.ora file
#          needed in the network admin directory for the $ORACLE_HOME
#          for OAS.
#          We no longer use links to create the OAS ORACLE_HOME version,
#          since OAS and DB may now be on separate machines.
#          Instead, create two identical files based on the same
#          template, with separate create scripts for each. There is a
#          corresponding setNet_db.sh script to create the tnsnames and
#          listener files for the database ORACLE_HOME.
#
# #####
# Date       Who           Why
# 4/19/2000  rwessa       Created.
#
# #####
echo " "
. $INSTALL_HOME/echodbg.sh "setNet_i.sh: Creating listener.ora and tnsnames.ora..."

cat ${INSTALL_HOME}/templates/oracle/listener.ora | \
sed "s+T_N_S_P_O_R_T+${TNS_PORT}+g | cat | \
sed "s+h_o_s_t_n_a_m_e+${hostname}+g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g \
> "${ORACLE_OAS_PROD_BASE}/network/admin/listener.ora"

chown ${ORACLE}:${GROUPNAME} "${ORACLE_OAS_PROD_BASE}/network/admin/listener.ora"
chown ${ORACLE}:${GROUPNAME} "${ORACLE_OAS_PROD_BASE}/network/admin/listener.ora" >>
$scriptfile

cat ${INSTALL_HOME}/templates/oracle/tnsnames.ora | \
sed "s+T_N_S_P_O_R_T+${TNS_PORT}+g | cat | \
sed "s+d_o_m_a_i_n+${domain}+g | cat | \
sed "s+h_o_s_t_n_a_m_e+${hostname}+g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g \
> "${ORACLE_OAS_PROD_BASE}/network/admin/tnsnames.ora"

```

```
chown ${ORACLE}:${GROUPNAME} "${ORACLE_OAS_PROD_BASE}/network/admin/tnsnames.ora"
chown ${ORACLE}:${GROUPNAME} "${ORACLE_OAS_PROD_BASE}/network/admin/tnsnames.ora" >>
$scriptfile

. $INSTALL_HOME/echodbg.sh "setNet_i.sh: done"
```

```
#!/bin/ksh
# Filename: setLinks_i.sh
#
# Author:      Robert Wessa
#              Northeast eBusiness Center
#              Oracle Corporation
#
# Description:
#
# This script recreates the appropriate links
# within the middle tier directory structure for iPrototype to work after
# cloning.
# The cloning process will change the directory structure and
# and links must be recreated to match.
#
# Do not call this script directly.  It should be called form the main
# setup.sh script.
#
# =====
# Revision History
# Date
# 03/14/2000 rwessa          Created
# =====

rm $ORACLE_OAS_PROD_BASE/network/agent/library/libosm.so
ln -s $ORACLE_OAS_PROD_BASE/lib/libosm.so \
$ORACLE_OAS_PROD_BASE/network/agent/library/libosm.so

rm $ORACLE_OAS_PROD_BASE/ows/mesg/owsus.msb
ln -s $ORACLE_OAS_PROD_BASE/ows/4.0/mesg/owsus.msb \
$ORACLE_OAS_PROD_BASE/ows/mesg/owsus.msb

rm $ORACLE_OAS_PROD_BASE/ows/mesg/owsus.msg
ln -s $ORACLE_OAS_PROD_BASE/ows/4.0/mesg/owsus.msg \
$ORACLE_OAS_PROD_BASE/ows/mesg/owsus.msg

# LTF 9/27/99 Suspect problem with link commands, and using the code below
# to be safe
rm $ORACLE_OAS_PROD_BASE/network/jre11/lib/sparc/green_threads/libXm.so
ln -s \
$ORACLE_OAS_PROD_BASE/network/jre11/lib/sparc/green_threads/libXm.so.3 \
$ORACLE_OAS_PROD_BASE/network/jre11/lib/sparc/green_threads/libXm.so
```



```

#!/bin/ksh
#Filename:          setInit.sh
# Routine to setup the the startup and shutdown scripts for iSpeed
#
# Written by: Lane Findley 8/1/99
#                Oracle Corporation

. $INSTALL_HOME/echodbg.sh "Configuring $STARTUP_LOCATION/S90${oracle_sid}"
cat ${INSTALL_HOME}/templates/init/S90ispeed | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_I_D+${ORACLE}+\"g | cat | \
    sed "s+V_I_G+${VIGNETTE}+\"g | cat | \
    sed "s+T_O_O_L_S_D_I_R+${TOOLS_DIR}+\"g | cat | \
    sed "s+I_C_S+${ICS}+\"g > "$STARTUP_LOCATION/S90${oracle_sid}"

. $INSTALL_HOME/echodbg.sh "Configuring $STARTUP_LOCATION/K02${oracle_sid}"
cat ${INSTALL_HOME}/templates/init/K02ispeed | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_I_D+${ORACLE}+\"g | cat | \
    sed "s+V_I_G+${VIGNETTE}+\"g | cat | \
    sed "s+T_O_O_L_S_D_I_R+${TOOLS_DIR}+\"g | cat | \
    sed "s+I_C_S+${ICS}+\"g > "$STARTUP_LOCATION/K02${oracle_sid}"

chmod +x "$STARTUP_LOCATION/S90${oracle_sid}"
chmod +x "$STARTUP_LOCATION/K02${oracle_sid}"

```

```
#!/bin/ksh
# Filename: setLinks_db.sh
#
# Author:      Robert Wessa
#              Northeast eBusiness Center
#              Oracle Corporation
#
# Description:
#
# This script calls the appropriate scripts to recreate the appropriate links
# within the Oracle directory structure for iPrototype to work after cloning.
# The cloning process will change the directory structure and
# and links must be recreated to match.
#
# Do not call this script directly.  It should be called form the main
# setup.sh script.
#
# =====
# Revision History
# Date
# 03/14/2000 rwessa          Created
# =====

if [ "$INSTALL_TYPE" = "D" ] ; then
    . $INSTALL_HOME/setLinks_db.sh
fi

if [ "$INSTALL_TYPE" = "I" ] ; then
    . $INSTALL_HOME/setLinks_i.sh
fi

if [ "$INSTALL_TYPE" = "F" ] ; then
    . $INSTALL_HOME/setLinks_db.sh
    . $INSTALL_HOME/setLinks_i.sh
fi
```

```

#!/bin/ksh
# Filename: configureDB.sh
#
# Description: Reconfigures a cloned database.
#
#             This script should NOT be called directly but needs
#             to be called from the main setup.sh installation script
#             for iPrototype Version 2.
#
# #####
# Date       Who       Why
# 2/10/2000  rwessa     Modified to use new variables for iPrototype
#                               Phase II
#
# #####

. $INSTALL_HOME/echodbg.sh " entering configureDB.sh ..." 2

scriptfile=$INSTALL_LOGFILE
echo DB_DATA_DIR=$DB_DATA_DIR >> $scriptfile
ls -la $DB_DATA_DIR >> $scriptfile
date >> $scriptfile
set >> $scriptfile
echo " " >> $scriptfile
pwd >> $scriptfile

#mv "$DB_ROOT_DIR/${OLD_ORACLE_SID}" "${DB_DATA_DIR}/${ORACLE_SID}"
# echo mv "$DB_ROOT_DIR/${OLD_ORACLE_SID}" "${DB_DATA_DIR}/${ORACLE_SID}" >> $scriptfile
#chown "${ORACLE}":$GROUPNAME "${DB_DATA_DIR}/${ORACLE_SID}"
# echo chown "${ORACLE}":$GROUPNAME "${DB_DATA_DIR}/${ORACLE_SID}" >> $scriptfile
mv "${ORACLE_BASE}/admin/${OLD_ORACLE_SID}" "${ORACLE_BASE}/admin/${ORACLE_SID}"
echo mv "${ORACLE_BASE}/admin/${OLD_ORACLE_SID}" "${ORACLE_BASE}/admin/${ORACLE_SID}" >>
$scriptfile
rm "${DB_DATA_DIR}/rdo11${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR}/rdo11${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR}/rdo12${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR}/rdo12${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR}/rdo${OLD_ORACLE_SID}13.dbf"
echo rmstat $? "${DB_DATA_DIR}/rdo13${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR}/rdo21${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR}/rdo21${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR}/rdo22${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR}/rdo22${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR}/rdo23${OLD_ORACLE_SID}.dbf"

```

```

echo rmstat $? "${DB_DATA_DIR}/rdo23${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR}/ctl1${OLD_ORACLE_SID}.ctl"
echo rmstat $? "${DB_DATA_DIR}/ctl1${OLD_ORACLE_SID}.ctl" >> $scriptfile
rm "${DB_DATA_DIR}/ctl2${OLD_ORACLE_SID}.ctl"
echo rmstat $? "${DB_DATA_DIR}/ctl2${OLD_ORACLE_SID}.ctl" >> $scriptfile

cd "${DB_DATA_DIR}"
cd "${DB_DATA_DIR}" >> $scriptfile
pwd >> $scriptfile
for source in *.dbf
do
    destination=`echo ${source} | sed "s/${OLD_ORACLE_SID}/${ORACLE_SID}/" `
    if [ "${source}" != "${destination}" ]
    then
        echo "\tRenaming ${source} to ${destination}..." >> $scriptfile
        echo mv ${source} "${destination}" >> $scriptfile
        mv ${source} "${destination}"
        echo $? Move status for ${source} "${destination}" >> $scriptfile
    fi
    chown ${ORACLE}:%GROUPNAME "${destination}"
    chown ${ORACLE}:%GROUPNAME "${destination}" >> $scriptfile
done

. $INSTALL_HOME/echodbg.sh "creating
${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/config${ORACLE_SID}.ora ..." 4
cat ${INSTALL_HOME}/templates/oracle/configDB.ora | \
    sed "s+D_B_D_A_T_A_D_I_R+${DB_DATA_DIR}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g | cat | \
    sed "s+O_R_A_C_L_E_B_A_S_E+${ORACLE_BASE}+g \
    > "${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/config${ORACLE_SID}.ora"
chown ${ORACLE}:%GROUPNAME
"${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/config${ORACLE_SID}.ora"
echo chown ${ORACLE}:%GROUPNAME
"${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/config${ORACLE_SID}.ora" >> $scriptfile

ln -s "${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/config${ORACLE_SID}.ora" \
    "${ORACLE_HOME}/dbs/config${ORACLE_SID}.ora"
echo ln -s "${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/config${ORACLE_SID}.ora" \
    "${ORACLE_HOME}/dbs/config${ORACLE_SID}.ora" >> $scriptfile

. $INSTALL_HOME/echodbg.sh "creating

```

```

${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/init${ORACLE_SID}.ora" 4
cat ${INSTALL_HOME}/templates/oracle/initDB.ora | \
    sed "s+D_B_D_A_T_A_D_I_R+${DB_DATA_DIR}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
    sed "s+O_R_A_C_L_E_B_A_S_E+${ORACLE_BASE}+\"g \
    > "${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/init${ORACLE_SID}.ora"
chown ${ORACLE}:${GROUPNAME}
"${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/init${ORACLE_SID}.ora"
echo chown ${ORACLE}:${GROUPNAME}
"${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/init${ORACLE_SID}.ora" >> $scriptfile

ln -s "${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/init${ORACLE_SID}.ora" \
    "${ORACLE_HOME}/dbs/init${ORACLE_SID}.ora"
echo ln -s "${ORACLE_BASE}/admin/${ORACLE_SID}/pfile/init${ORACLE_SID}.ora" \
    "${ORACLE_HOME}/dbs/init${ORACLE_SID}.ora" >> $scriptfile

. $INSTALL_HOME/echodbg.sh "creating ${DB_DATA_DIR}/cr${ORACLE_SID}ctrl.sql" 4
cat ${INSTALL_HOME}/templates/oracle/crctrl.sql | \
    sed "s+D_B_D_A_T_A_D_I_R+${DB_DATA_DIR}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
    sed "s+O_R_A_C_L_E_B_A_S_E+${ORACLE_BASE}+\"g \
    > "${DB_DATA_DIR}/cr${ORACLE_SID}ctrl.sql"
chown ${ORACLE}:${GROUPNAME} "${DB_DATA_DIR}/cr${ORACLE_SID}ctrl.sql"

# Use svrmgr to create new control files
. $INSTALL_HOME/echodbg.sh "Attempting to run svrmgr to create control files..." 4
su - ${ORACLE} -c "
ORACLE_SID=${ORACLE_SID}
ORAENV_ASK=NO
cat "${DB_DATA_DIR}/cr${ORACLE_SID}ctrl.sql" | svrmgrl
"

# Now start database and tns listener
su - ${ORACLE} -c "startDB${oracle_sid}"
su - ${ORACLE} -c "startNET${oracle_sid}"

. $INSTALL_HOME/echodbg.sh "configureDB.sh completed." 2

```

```

#!/bin/ksh
#Filename:      setOwners_db.sh
#Author:       RWessa
#Description:   Sets proper ownership of Oracle files during
#              iPrototype installation.
#
#              Do not call this script directly.  Instead, you
#              should run the setup.sh script which will eventually
#              call this script.
#
#
# =====

# remove references to old ORACLE_SID in $ORACLE_HOME/dbs directory
echo " "
echo "removing references to old ORACLE_SID $OLD_ORACLE_SID in $ORACLE_HOME/dbs
directory"
rm "$ORACLE_HOME/dbs/config${OLD_ORACLE_SID}.ora"
rm "$ORACLE_HOME/dbs/init${OLD_ORACLE_SID}.ora"
rm "$ORACLE_HOME/dbs/init${OLD_ORACLE_SID}_0.ora"
#rm "$ORACLE_HOME/dbs/init${OLD_ORACLE_SID}_0.ora"

#set database file ownership
echo "Setting ownership of $DB_ROOT_DIR/$ORACLE_SID to $ORACLE:$GROUPNAME"
chown -R "$ORACLE:$GROUPNAME" "$DB_ROOT_DIR/$ORACLE_SID"
#chgrp -R dba "$DB_DIR"

#set Oracle Technology set files ownership
echo "Setting ownership of $ORACLE_BASE to $ORACLE:$GROUPNAME"
chown -R "$ORACLE:$GROUPNAME" "$ORACLE_BASE"

```

```
#!/bin/ksh
# Filename:          createUsers.sh
# Utility for creating user accounts for iSpeed systems
# Robert Wessa
# Oracle Corporation
#
#
# This script calls the proper scripts to perform the installation
# for iPrototype.
# Do not call this script directly, rather it is called from the
# main setup.sh script during the iPrototype installation.
#
```

```
#
# INSTALL_TYPE=D =====
#
if [ "$INSTALL_TYPE" = "D" ] ; then
. $INSTALL_HOME/createUsers_db.sh
# end of if $INSTALL_TYPE=D
fi
```

```
#
# INSTALL_TYPE=I =====
#
if [ "$INSTALL_TYPE" = "I" ] ; then
. $INSTALL_HOME/createUsers_i.sh
. $INSTALL_HOME/createUsers_np.sh
# end of if $INSTALL_TYPE=I
fi
```

```
#
# INSTALL_TYPE=V =====
#
if [ "$INSTALL_TYPE" = "V" ] ; then
. $INSTALL_HOME/createUsers_vgn.sh
. $INSTALL_HOME/createUsers_ap.sh
# end of if $INSTALL_TYPE=V
fi
```

```
#
# INSTALL_TYPE=F =====
#
```



```

#!/bin/ksh
#Filename:          setOwners_vgn.sh
#Author:           RWessa
#Description:       Sets proper ownership of files during iPrototype
#                   installation
#
#                   Do not call this script directly.  Instead, you
#                   should run the setup.sh script which will eventually
#                   call this script.
#
#
# =====

. $INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/echodbg.sh "Changing owner of $ORACLE_VGN_BASE to $VIGNETTE:$GROUPNAME"

# LTF added 9/17/99 remove dangling links in $ORACLE_HOME/dbs directory
#rm "$ORACLE_HOME/dbs/config${old_oracle_sid}.ora"
#rm "$ORACLE_HOME/dbs/init${old_oracle_sid}.ora"

#rm "$ORACLE_HOME/dbs/init${old_oracle_sid}_0.ora"

chown -R "$VIGNETTE":$GROUPNAME "$ORACLE_VGN_BASE"

. $INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/echodbg.sh "Changing owner of $ORACLE_AP_BASE to $APACHE:$GROUPNAME"
chown -R "$APACHE":$GROUPNAME "$ORACLE_AP_BASE"

```

```
#!/bin/ksh
#Filename:      setOwners_i.sh
#Author:       RWessa
#Description:   Sets proper ownership of files during iPrototype
#              installation
#
#              Do not call this script directly.  Instead, you
#              should run the setup.sh script which will eventually
#              call this script.
#
#
# =====
```

```
echo " "
```

```
# Set the ownership of the iStore/iMarketing/OAS directories
echo "Changing owner of $BASE_DIR/$ICS directory files"
chown -R "$ICS:$GROUPNAME" "$BASE_DIR/$ICS"

# Set the ownership of the netp directories
echo "Changing owner of $BASE_DIR/$NETP directory files"
chown -R "$NETP:$GROUPNAME" "$BASE_DIR/$NETP"
```

```
#!/bin/ksh
#Filename:      setOwners_full.sh
#Author:       RWessa
#Description:   Sets proper ownership of files during iPrototype
#              installation
#
#              Do not call this script directly.  Instead, you
#              should run the setup.sh script which will eventually
#              call this script.
#
#              This file sets all ownership for the full
#              installation and simply calls each individual
#              file.
#
# =====

echo "entering setOwners_full.sh ... "
. $INSTALL_HOME/setOwners_i.sh
. $INSTALL_HOME/setOwners_db.sh
. $INSTALL_HOME/setOwners_vgn.sh
```

```

#!/bin/ksh
# Filename:  setup.sh
# Author:    Robert Wessa
# Parameters:      None
#
# Description:      This file will prompt the user for the necessary input
#                   parameters to run the iPrototype installation.
#
#                   This file will prompt you for directory, port number,
#                   username, etc., information and the following two key
#                   items.
#
#                   Install type: (Full, DB only, iStore/OAS/iMarketing only).
#                   The installation has the ability to load everything on one
#                   server or split it into a database and application server.
#
#                   iStore, OAS and iMarketing must be on the same server. They
#                   can be included with the database on one central server or
#                   loaded separately onto a middle tier applications server.
#
#                   If the install type is
#                   Full:      all products will be installed
#                   DB Only:  only the database (database files and software) will
#                               be loaded onto the current machine.
#                   Application server: iStore, OAS, and iMarketing are installed
#                               on the current machine.
#
#                   If you do not choose a full install, you must install each
#                   of the other two options separately.
#
#                   Vignette Inclusion:  Vignette can be included or dropped
#                   from the solution set.
#
#                   If the solution includes Vignette
#                       iStore templates which call Vignette will be copied.
#                   If the solution does not include Vignette
#                       iStore templates which do not call Vignette will be copied.
#                       The Vignette schema will be removed from the database.
#                       The Vignette files will be removed from the file system
#                       The Apache files will be removed from the file system.
#                       Apache and Vignette references will be removed from the
#                           startup scripts.
# =====

```

```

# Revision History
# Date          Who          Why
# 01/31/2000  rwessa        Initial create date
#
# =====
#
# =====
# ===== Begin Main Program =====
# =====

#
# determine the installation type
# we can install everything on the current machine, just the database,
# or just the OAS/iStore/iMarketing piece.
# we do loop through until we get a valid response (F,I or D) to this question
ans_ok="N"
#echo starting while
while [ "$ans_ok" = "N" ]
do
    export INSTALL_TYPE=F
    echo
    echo "Please specify 1 of the 4 installation types to be performed."
    echo "  Vignette/Apache only(V)"
    echo "  iStore/OAS/iMarketing only(I)"
    echo "  Database only (D)"
    echo "  Full solution set(F)"
    echo "  Exit installer without installing anything(X)"
    echo "Please select one of the above (F,I,D) [$INSTALL_TYPE]"
    read ans
    if [ $ans ] ; then
        INSTALL_TYPE=`echo ${ans} | tr "a-z" " [A-Z]"`
        if [ "$INSTALL_TYPE" = "V" ] ; then
            ans_ok="Y"
        elif [ "$INSTALL_TYPE" = "I" ] ; then
            ans_ok="Y"
        elif [ "$INSTALL_TYPE" = "D" ] ; then
            ans_ok="Y"
        elif [ "$INSTALL_TYPE" = "F" ] ; then
            ans_ok="Y"
        elif [ "$INSTALL_TYPE" = "X" ] ; then
            ans_ok="Y"
        echo "Installing terminated, no installation tasks performed."
        exit
    fi
done

```

```

else
    echo
    echo Please answer V,I,D,F or X. $INSTALL_TYPE is an invalid response.
    ans_ok="N"
fi
else
    ans_ok="Y"
fi
done
#
# determine if we will include Vignette in the solution set
# we do loop through until we get a valid response (Y or N) to this question
ans_ok="N"
#echo starting while
while [ "$ans_ok" = "N" ]
do
    INCLUDE_VIGNETTE=Y
    echo "Will Vignette be part of the solution set (Y or N) [$INCLUDE_VIGNETTE]"
    read ans
    if [ $ans ] ; then
        INCLUDE_VIGNETTE=`echo ${ans} | tr "a-z" "A-Z"`
        if [ "$INCLUDE_VIGNETTE" = "Y" ] ; then
            ans_ok="Y"
        elif [ "$INCLUDE_VIGNETTE" = "N" ] ; then
            ans_ok="Y"
        else
            echo
            echo Please answer Y or N, $INCLUDE_VIGNETTE is an invalid response.
            ans_ok="N"
        fi
    else
        ans_ok="Y"
    fi
done
#
export TOOLS_OLD_DIR=/u02/app/
echo "Enter the old tools directory[$TOOLS_OLD_DIR]"
read ans
if [ $ans ] ; then
    TOOLS_OLD_DIR=$ans
fi
#
export BASE_DIR=/u02/app

```

```
echo "Enter the base applications directory [$BASE_DIR]"
read ans
if [ $ans ] ; then
    BASE_DIR=$ans
fi
#
export OLD_HOSTNAME=dallsoluctrsv01
echo "Enter the old hostname [$OLD_HOSTNAME]"
read oh
if [ $oh ] ; then
    OLD_HOSTNAME=$oh
fi
#
export OLD_ORACLE_SID=FITS
echo "Enter the old ORACLE_SID [$OLD_ORACLE_SID]"
read oos
if [ $oos ] ; then
    OLD_ORACLE_SID=$oos
fi
#
export OLD_APACHE_BASE=454
echo "Enter the old Apache Base number [$OLD_APACHE_BASE]"
read oab
if [ $oab ] ; then
    OLD_APACHE_BASE=$oab
fi
#
export ORACLE=oraii
echo "Enter the Oracle username [$ORACLE]"
read ou
if [ $ou ] ; then
    ORACLE=$ou
fi
#
export APACHE=apaii
echo "Enter the apache username [$APACHE]"
read au
if [ $au ] ; then
    APACHE=$au
fi
#
export ICS=icsii
echo "Enter the iStore username [$ICS]"
```

```

read iu
if [ $iu ] ; then
    ICS=$iu
fi
#
export VIGNETTE=vignii
echo "Enter the Vignette username [$VIGNETTE]"
read ans
if [ $ans ] ; then
    VIGNETTE=$ans
fi
#
export GROUPNAME=dba
echo "Enter the new Group name for these users [$GROUPNAME]"
read ans
if [ $ans ] ; then
    GROUPNAME=$ans
fi
#
export ORACLE_SID=ISPDII;
export oracle_sid=`echo $ORACLE_SID | tr "A-Z" "a-z"`
echo "Enter the new ORACLE_SID [$ORACLE_SID]"
read ans
if [ $ans ] ; then
    ORACLE_SID=`echo $ans | tr "a-z" "A-Z"`
    oracle_sid=`echo $ans | tr "A-Z" "a-z"`
fi
#
export ORACLE_BASE=$BASE_DIR/$ORACLE
echo "Enter the location for your ORACLE_BASE [$ORACLE_BASE]"
read ans
if [ $ans ] ; then
    ORACLE_BASE=$ans
fi
#
export ORACLE_HOME=$ORACLE_BASE/product/805
echo "Enter the location for your ORACLE_HOME [$ORACLE_HOME]"
read ans
if [ $ans ] ; then
    ORACLE_HOME=$ans
fi
#
export ORACLE_OAS_BASE=$BASE_DIR/$ICS

```



```

echo "Enter the location for your OAS ORACLE_BASE [$ORACLE_OAS_BASE] "
read ans
if [ $ans ] ; then
    ORACLE_OAS_BASE=$ans
fi
#
export ORACLE_VGN_BASE=$BASE_DIR/$VIGNETTE
echo "Enter the location for your Vignette base directory [$ORACLE_VGN_BASE] "
read ans
if [ $ans ] ; then
    ORACLE_VGN_BASE=$ans
fi
#
export DB_ROOT_DIR=/u02/oradata
echo "Enter the parent Oracle database file directory[$DB_ROOT_DIR] "
read ans
if [ $ans ] ; then
    DB_ROOT_DIR=$ans
fi
#
export DB_DATA_DIR=/u02/oradata/$ORACLE_SID
echo "Enter the base Oracle database file directory[$DB_DATA_DIR] "
read ans
if [ $ans ] ; then
    DB_DATA_DIR=$ans
fi
#
export DOMAIN=us.oracle.com
echo "Enter the new domain [$DOMAIN] "
read dom
if [ $dom ] ; then
    DOMAIN=$dom
fi
#
export proxyserver=www-proxy.us.oracle.com
echo "Enter the new proxy server [$proxyserver] "
read ps
if [ $ps ] ; then
    proxyserver=$ps
fi
#
export proxyport=80
echo "Enter the new proxy port [$proxyport] "

```

```

read pp
if [ $pp ] ; then
    proxyport=$pp
fi
#
export OAS_NODE=46407
echo "Enter the new OAS Node port number [OAS_NODE]"
read oasn
if [ $oasn ] ; then
    OAS_NODE=$oasn
fi
#
export OAS_ADMIN=46406
echo "Enter the new OAS Admin port # [OAS_ADMIN]"
read oasa
if [ $oasa ] ; then
    OAS_ADMIN=$oasa
fi
#
export NETP_PORT=46435
echo "Enter the new Net Perceptions port # [NETP_PORT]"
read np
if [ $np ] ; then
    NETP_PORT=$np
fi
#
export OAS_BASE=464
echo "Enter the OAS Ports Base # [OAS_BASE]"
read oasb
if [ $oasb ] ; then
    OAS_BASE=$oasb
fi
#
export APACHE_BASE=464
echo "Enter the Apache Ports Base # [APACHE_BASE]"
read apacheb
if [ $apacheb ] ; then
    APACHE_BASE=$apacheb
fi
#
export OAS_ORB_BASE=46408
echo "Enter the OAS ORB Base [OAS_ORB_BASE]"
read oasob

```

```

if [ $oasob ] ; then
    OAS_ORB_BASE=$oasob
fi
#
export TNS_PORT=46437
echo "Enter the new TNS Port number [TNS_PORT]"
read tnsp
if [ $tnsp ] ; then
    TNS_PORT=$tnsp
fi
#
export VHS_PORT=46436
echo "Enter the VHS Port number [VHS_PORT]"
read vhsp
if [ $vhsp ] ; then
    VHS_PORT=$vhsp
fi
#
export TAR_DIR=/u14/cdimage/iPrototype/WithoutEMU
echo "Enter the directory location containing the TAR files [TAR_DIR]"
read tdir
if [ $tdir ] ; then
    TAR_DIR=$tdir
fi
#
export ORACLETS_FILE=oraclelets.tar
echo "Enter the Oracle technology stack tar file [ORACLETS_FILE] "
read ans
if [ $ans ] ; then
    ORACLETS_FILE=$ans
fi
#
export ORADATA_FILE=oradata.tar
echo "Enter the Oracle data tar file [ORADATA_FILE] "
read ans
if [ $ans ] ; then
    ORADATA_FILE=$ans
fi
#
export MIDTIER_FILE=middletier.tar
echo "Enter the Middle Tier tar file [MIDTIER_FILE] "
read ans
if [ $ans ] ; then

```

```

MIDTIER_FILE=$ans
fi
#
export NETP_FILE=netp.tar
echo "Enter the Net Perceptions tar file [$NETP_FILE] "
read ans
if [ $ans ] ; then
    NETP_FILE=$ans
fi
#
export APACHE_FILE=apache.tar
echo "Enter the Apache tar file [$APACHE_FILE] "
read ans
if [ $ans ] ; then
    APACHE_FILE=$ans
fi
#
export VIGNETTE_FILE=vignette.tar
echo "Enter the Vignette tar file [$VIGNETTE_FILE] "
read ans
if [ $ans ] ; then
    VIGNETTE_FILE=$ans
fi
#
# need $TOOL_DIR for previous version compatibility
export TOOLS_DIR=$BASE_DIR/$ORACLE
export HOSTNAME=`hostname | tr "a-z" "A-Z"`
export hostname=`echo ${HOSTNAME} | tr "A-Z" "a-z"`
export IP_ADDRESS=`grep ${hostname} /etc/hosts | awk '{print $1}'`
export ORACLE_SID=`echo ${ORACLE_SID} | tr "a-z" "A-Z"`
export oracle_sid=`echo ${ORACLE_SID} | tr "A-Z" "a-z"`
export OLD_ORACLE_SID=`echo ${OLD_ORACLE_SID} | tr "a-z" "A-Z"`
export old_oracle_sid=`echo ${OLD_ORACLE_SID} | tr "A-Z" "a-z"`
export domain=`echo ${DOMAIN} | tr "A-Z" "a-z"`
#export ORACLE_HOME="${ORACLE_BASE}/oracle/product/8.0.5"
export logged_user=`id | cut -c7-10`
#
# Now print settings for review
echo
echo Current Settings
echo ORACLE_SID=$ORACLE_SID
echo ORACLE_BASE=$ORACLE_BASE
echo TOOLS_OLD_DIR=$TOOLS_OLD_DIR

```

```

echo OLD_HOSTNAME=$OLD_HOSTNAME
echo OLD_ORACLE_SID=$OLD_ORACLE_SID
echo OLD_APACHE_BASE=$OLD_APACHE_BASE
echo TOOLS_DIR=$TOOLS_DIR
echo DB_ROOT_DIR=$DB_ROOT_DIR
echo DB_DATA_DIR=$DB_DATA_DIR
echo ORACLE=$ORACLE
echo APACHE=$APACHE
echo ICS=$ICS
echo VIGNETTE=$VIGNETTE
echo GROUPNAME=$GROUPNAME
echo BASE_DIR=$BASE_DIR
echo ORACLE_BASE=$ORACLE_BASE
echo ORACLE_OAS_BASE=$ORACLE_OAS_BASE
echo ORACLE_VGN_BASE=$ORACLE_VGN_BASE
echo DB_ROOT_DIR=$DB_ROOT_DIR
echo DOMAIN=$DOMAIN
echo proxyserver=$proxyserver
echo proxyport=$proxyport
echo OAS_NODE=$OAS_NODE
echo OAS_ADMIN=$OAS_ADMIN
echo NETP_PORT=$NETP_PORT
echo OAS_BASE=$OAS_BASE
echo APACHE_BASE=$APACHE_BASE
echo OAS_ORB_BASE=$OAS_ORB_BASE
echo TNS_PORT=$TNS_PORT
echo VHS_PORT=$VHS_PORT
echo HOSTNAME=$HOSTNAME
echo hostname=$hostname
echo IP_ADDRESS=$IP_ADDRESS
echo ORACLE_SID=$ORACLE_SID
echo oracle_sid=$oracle_sid
echo OLD_ORACLE_SID=$OLD_ORACLE_SID
echo old_oracle_sid=$old_oracle_sid
echo domain=$domain
echo ORACLE_HOME=$ORACLE_HOME
echo logged_user=$logged_user
echo INCLUDE_VIGNETTE=$INCLUDE_VIGNETTE
echo INSTALL_TYPE=$INSTALL_TYPE
echo TAR_DIR=$TAR_DIR
echo ORACLE_TS_FILE=$ORACLETS_FILE
echo ORADATA_FILE=$ORADATA_FILE
echo MIDTIER_FILE=$MIDTIER_FILE

```

```

echo NETP_FILE=$NETP_FILE
echo APACHE_FILE=$APACHE_FILE
echo VIGNETTE_FILE=$VIGNETTE_FILE
#
# =====
# now start installation
# we do loop through until we get a valid response (Y or N) to this question
ans_ok="N"
while [ "$ans_ok" = "N" ]
do
    START_INSTALL=Y
    echo
    echo Answer Y to start install, N to rerun setup, or X to exit.
    echo "Start installation using these values (Y/N/X)  "
    read START_INSTALL
    START_INSTALL=`echo ${START_INSTALL} | tr "a-z" " [A-Z]"`
    if [ "$START_INSTALL" = "Y" ] ; then
        ans_ok="Y"
    elif [ "$START_INSTALL" = "N" ] ; then
        ans_ok="Y"
    elif [ "$START_INSTALL" = "X" ] ; then
        ans_ok="Y"
        echo "Installation aborted.  "
        exit
    else
        echo
        echo Please answer Y or N. $START_INSTALL is an invalid response.
        ans_ok="N"
    fi
done
#
# Call main installation script or rerun setup
#
if [ "$START_INSTALL" = "Y" ] ; then
    ./mainii.sh
else
    ./setup.sh
fi

```

```

#!/bin/ksh

echo " entering configureICS.sh"

#
echo "configuring cnls.en.msg "
cat $INSTALL_HOME/templates/ics/cnls.en.msg | \
    sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+"g | cat | \
    sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+"g | cat | \
    sed "s+O_A_S_B_A_S_E+${OAS_BASE}+"g | cat | \
    sed "s+P_R_O_X_Y_S_E_R_V_E_R+${proxyserver}+"g | cat | \
    sed "s+I_P_A_D_D_R_E_S_S+${IP_ADDRESS}+"g | cat | \
    sed "s+P_R_O_X_Y_P_O_R_T+${proxyport}+"g \
    > "$ORACLE_OAS_PROD_BASE/stage/store/mesg/cnls.en.msg"
chown ${ICS}:${GROUPNAME} "$ORACLE_OAS_PROD_BASE/stage/store/mesg/cnls.en.msg"

#
echo "configuring primary.dat "
cat $INSTALL_HOME/templates/ics/primary.dat | \
    sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+"g | cat | \
    sed "s+O_A_S_N_O_D_E_P_O_R_T+${OAS_NODE_PORT}+"g | cat | \
    sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+"g | cat | \
    sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+"g \
    > "$ORACLE_OAS_PROD_BASE/ows/4.0/admin/primary.dat"

#
echo "configuring cstage.cfg "
cat $INSTALL_HOME/templates/ics/cstage.cfg | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+"g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+"g | cat | \
    sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+"g \
    > "$ORACLE_OAS_PROD_BASE/oec/config/cstage.cfg"

#
echo "configuring mstage.cfg "
cat $INSTALL_HOME/templates/ics/mstage.cfg | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+"g \
    > "$ORACLE_OAS_PROD_BASE/oec/config/mstage.cfg"

```

```

#
echo "configuring oecinvitm.cfg"
cat $INSTALL_HOME/templates/ics/oecinvitm.cfg | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g \
    > "$ORACLE_OAS_PROD_BASE/oec/config/oecinvitm.cfg"

#
echo "configuring owssenv_bsh.sh"
cat $INSTALL_HOME/templates/ics/owssenv_bsh.sh | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
    sed "s+O_A_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g \
    > "$ORACLE_OAS_PROD_BASE/ows/4.0/install/owssenv_bsh.sh"

#
echo "configuring gatekeeper.ior "
cat $INSTALL_HOME/templates/ics/gatekeeper.ior | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g \
    > "$ORACLE_OAS_PROD_BASE/ows/4.0/bin/gatekeeper.ior"

# can't seem to find perlidl in this version
#cat $INSTALL_HOME/templates/ics/perlidl | \
#    sed "s+T_O_O_L_S_D_I_R+${TOOLS_DIR}+\"g \
#    > "$ORACLE_OAS_PROD_BASE/ows/4.0/bin/perlidl"

#
echo "configuring rmproxy.ior"
cat $INSTALL_HOME/templates/ics/rmproxy.ior | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g \
    > "$ORACLE_OAS_PROD_BASE/ows/4.0/bin/rmproxy.ior"

#
echo "configuring server.dfl "
cat $INSTALL_HOME/templates/ics/server.dfl | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g \
    > "$ORACLE_OAS_PROD_BASE/ows/4.0/admin/config/server.dfl"

# The following templates don't exist yet
#cp $INSTALL_HOME/templates/ics/ieclogininv.en.htm \
#    "$ORACLE_OAS_PROD_BASE/stage/store/templates/ieclogininv.en.htm"
#chown $ICS:$GROUPNAME "$ORACLE_OAS_PROD_BASE/stage/store/templates/ieclogininv.en.htm"
#cp $INSTALL_HOME/templates/ics/ispdecwalkin.en.htm \

```



```
# "$ORACLE_OAS_PROD_BASE/stage/store/templates/ispdecwalkin.en.htm"
#chown $ICS:$GROUPNAME "$ORACLE_OAS_PROD_BASE/stage/store/templates/ispdecwalkin.en.htm"
#cp $INSTALL_HOME/templates/ics/ispdstoreindex.en.htm \
# "$ORACLE_OAS_PROD_BASE/stage/store/templates/ispdstoreindex.en.htm"
#chown $ICS:$GROUPNAME
"$ORACLE_OAS_PROD_BASE/stage/store/templates/ispdstoreindex.en.htm"
```

```

#!/bin/ksh
# Filename: fixSCCS_full.sh
#
# Remove dangling links for SCCS embedded in the Oracle home
# directory tree.

#
# INSTALL_TYPE=D =====
#
if [ "$INSTALL_TYPE" = "D" ] ; then
. $INSTALL_HOME/fixSCCS_db.sh
# end of if $INSTALL_TYPE=D
fi

#
# INSTALL_TYPE=I =====
#
if [ "$INSTALL_TYPE" = "I" ] ; then
. $INSTALL_HOME/fixSCCS_i.sh
# end of if $INSTALL_TYPE=I
fi

#
# INSTALL_TYPE=V =====
#
if [ "$INSTALL_TYPE" = "V" ] ; then
. $INSTALL_HOME/fixSCCS_vgn.sh
. $INSTALL_HOME/fixSCCS_ap.sh
# end of if $INSTALL_TYPE=V
fi

#
# INSTALL_TYPE=F =====
#
if [ "$INSTALL_TYPE" = "F" ] ; then
. $INSTALL_HOME/fixSCCS_db.sh
. $INSTALL_HOME/fixSCCS_i.sh
. $INSTALL_HOME/fixSCCS_ap.sh
. $INSTALL_HOME/fixSCCS_vgn.sh
# end of if $INSTALL_TYPE=F
fi

```



```
#!/bin/ksh
#
#
# Remove dangling links for SCCS embedded in the Oracle home
# directory tree.

rm `find "${ORACLE_BASE}" -local -name SCCS -print`

exit
```



```

#!/bin/ksh
#
# Routine to set OAS to work with iStore and new nodename
#
# Written by: Lane Findley 8/1/99
#           Oracle Corporation
#
#
# Revision History
# Date      Who?      why?
# =====
# 2/24/2000 rwessa    modified for iSpeed Phase using new directory setup
#
# =====

#update the WebSite Name
mv ${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME_OLD}
${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}
mv ${ORACLE_OAS_BASE}/admin/orb/${OAS_SITE_NAME_OLD}
${ORACLE_OAS_BASE}/admin/orb/${OAS_SITE_NAME}

$INSTALL_HOME/echodbg.sh "mv ${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME_OLD} 4
${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}"
$INSTALL_HOME/echodbg.sh "mv ${ORACLE_OAS_BASE}/admin/orb/${OAS_SITE_NAME_OLD}
${ORACLE_OAS_BASE}/admin/orb/${OAS_SITE_NAME}" 4

#update the http directory name
mv "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_*"
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}"
$INSTALL_HOME/echodbg.sh "mv ${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_*
${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}" 4

#
# Remove old log files
#
rm "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/log/*"

#
# Change host name in .omnaddr file
#
$INSTALL_HOME/echodbg.sh "TCP:${hostname}:${OAS_ORB_BASE}49" >
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/.omnaddr" 4
chown "${ICS}:${GROUPNAME}" "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/.omnaddr"

```

Edit and copy the .app files to the wrb directory

```
$INSTALL_HOME/echodbg.sh "configuring site.app" 4
cat $INSTALL_HOME/templates/web/site.app | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
    sed "s+O_A_S_N_O_D_E+${OAS_NODE}+\"g | cat | \
    sed "s+N_O_D_E_P_O_R_T+${OAS_NODE}+\"g | cat | \
    sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
    sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
    sed "s+I_C_S+${ICS}+\"g \
    > "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/site.app"
chown ${ICS}:${GROUPNAME} "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/site.app"
```

#

```
$INSTALL_HOME/echodbg.sh "configuring wrb.app" 4
cat $INSTALL_HOME/templates/web/wrb.app | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
    sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
    sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
    sed "s+I_C_S+${ICS}+\"g \
    > "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/wrb.app"
chown ${ICS}:${GROUPNAME} "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/wrb.app"
```

#

```
$INSTALL_HOME/echodbg.sh "configuring site_s.app" 4
cat $INSTALL_HOME/templates/web/site_s.app | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
    sed "s+O_A_S_N_O_D_E+${OAS_NODE}+\"g | cat | \
```

```

sed "s+N_O_D_E_P_O_R_T+${OAS_NODE}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
sed "s+I_C_S+${ICS}+\"g \
> "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/site_s.app"
chown ${ICS}:${GROUPNAME} "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/site_s.app"

```

```

#
$INSTALL_HOME/echodbg.sh "configuring site_e.app" 4
cat $INSTALL_HOME/templates/web/site_e.app | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+O_A_S_N_O_D_E+${OAS_NODE}+\"g | cat | \
sed "s+N_O_D_E_P_O_R_T+${OAS_NODE}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
sed "s+I_C_S+${ICS}+\"g \
> "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/site_e.app"
chown ${ICS}:${GROUPNAME} "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/wrb/site_e.app"

```

```

#
$INSTALL_HOME/echodbg.sh "configuring adapter.app" 4
cat $INSTALL_HOME/templates/web/adapter.app | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
sed "s+I_C_S+${ICS}+\"g \
> "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/adapter.app"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/adapter.app"

```

```

#
$INSTALL_HOME/echodbg.sh "configuring owl.cfg" 4
cat $INSTALL_HOME/templates/web/owl.cfg | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \

```



```

sed "s+A_D_M_I_N_P_O_R_T+${OAS_ADMIN}+\"g | cat | \
sed "s+I_P_A_D_D_R_E_S_S+${ip_address}+\"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
sed "s+I_C_S+${ICS}+\"g \
> "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/owl.cfg"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/owl.cfg"

```

```

#
$INSTALL_HOME/echodbg.sh "configuring svadmin.cfg" 4
cat $INSTALL_HOME/templates/web/svadmin.cfg | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+A_D_M_I_N_P_O_R_T+${OAS_ADMIN}+\"g | cat | \
sed "s+N_O_D_E_P_O_R_T+${OAS_NODE}+\"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
sed "s+I_C_S+${ICS}+\"g \
> "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/admin/svadmin.cfg"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/admin/svadmin.cfg"

```

```

#
$INSTALL_HOME/echodbg.sh "configuring svwww.cfg" 4
cat $INSTALL_HOME/templates/web/svwww.cfg | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \

```

```

sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+"g | cat | \
sed "s+I_C_S+${ICS}+"g \
> "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/www/svwww.cfg"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/www/svwww.cfg"

#
$INSTALL_HOME/echodbg.sh "configuring svnode.cfg" 4
cat $INSTALL_HOME/templates/web/svnode.cfg | \
sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+"g | cat | \
sed "s+O_A_S_N_O_D_E_P_O_R_T+${OAS_NODE_PORT}+"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+"g | cat | \
sed "s+I_C_S+${ICS}+"g \
> "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/node/svnode.cfg"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/node/svnode.cfg"

#
$INSTALL_HOME/echodbg.sh "configuring svcdeploy.cfg" 4
cat $INSTALL_HOME/templates/web/svcdeploy.cfg | \
sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+"g | cat | \
sed "s+I_C_S+${ICS}+"g \
>
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/cdeploy/svcdeploy.cfg"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/cdeploy/svcdeploy.cfg"

```

```

#
$INSTALL_HOME/echodbg.sh "configuring svcstage.cfg" 4
cat $INSTALL_HOME/templates/web/svcstage.cfg | \
    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
    sed "s+I_P_A_D_D_R_E_S_S+${ip_address}+\"g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
    sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
    sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
    sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
    sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
    sed "s+I_C_S+${ICS}+\"g \
>
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/cstage/svcstage.cfg"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/cstage/svcstage.cfg"

# to be done once ispeed listener in OAS is defined
#mkdir "${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/${oracle_sid}"
#chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/${oracle_sid}"
#cat $INSTALL_HOME/templates/web/svispeed.cfg | \
#    sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
#    sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
#    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
#    sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
#    sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
#    sed "s+T_O_O_L_S_D_I_R+${TOOLS_DIR}+\"g | cat | \
#    sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
#    sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
#    sed "s+I_C_S+${ICS}+\"g \
#    >
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/${oracle_sid}/sv${oracle_sid}.cfg"
#chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${OAS_SITE_NAME}/httpd_${hostname}/${oracle_sid}/sv${oracle_sid}.cfg"

#
$INSTALL_HOME/echodbg.sh "configuring svmstage.cfg" 4
cat $INSTALL_HOME/templates/web/svmstage.cfg | \

```

```

sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
sed "s+I_C_S+${ICS}+\"g \
> "${ORACLE_OAS_BASE}/admin/ows/${ORACLE_SID}/httpd_${hostname}/mstage/svmstage.cfg"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${ORACLE_SID}/httpd_${hostname}/mstage/svmstage.cfg"

#
$INSTALL_HOME/echodbg.sh "configuring svots.cfg" 4
cat $INSTALL_HOME/templates/web/svots.cfg | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
sed "s+G_R_O_U_P_N_A_M_E+${GROUPNAME}+\"g | cat | \
sed "s+O_A_S_B_A_S_E+${OAS_BASE}+\"g | cat | \
sed "s+I_C_S+${ICS}+\"g \
> "${ORACLE_OAS_BASE}/admin/ows/${ORACLE_SID}/httpd_${hostname}/ots/svots.cfg"
chown ${ICS}:${GROUPNAME}
"${ORACLE_OAS_BASE}/admin/ows/${ORACLE_SID}/httpd_${hostname}/ots/svots.cfg"

#
$INSTALL_HOME/echodbg.sh "configuring resources.ora" 4
cat $INSTALL_HOME/templates/web/resources.ora | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+\"g | cat | \
sed "s+O_A_S_O_R_B_B_A_S_E+${OAS_ORB_BASE}+\"g | cat | \
sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+\"g | cat | \
sed "s+I_C_S+${ICS}+\"g \
> "${ORACLE_OAS_BASE}/admin/orb/${ORACLE_SID}/resources.ora"

```

```
chown ${ICS}:${GROUPNAME} "${ORACLE_OAS_BASE}/admin/orb/${ORACLE_SID}/resources.ora"
```

```
$INSTALL_HOME/echodbg.sh "Starting OAS..." 4
```

```
su - ${ICS} -c "startWEB"
```

```
$INSTALL_HOME/echodbg.sh "configureOAS.sh complete." 2
```

```

#!/bin/ksh
#Filename:   configureVignette.sh
#
# Routine to setup Vignette files
#
# Written by: Lane Findley 8/1/99
#           Oracle Corporation
#
# Revision History
# =====
# Date      Who          Why
# Mar2000   rwessa       Updated to work with iPrototype Version 2
#
# =====

. $INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/echodbg.sh "entering configureVignette.sh ..."

vig_dir="$ORACLE_VGN_BASE/StoryServer/R4.2"; export vig_dir
vig_source=${INSTALL_HOME}/templates/vignette
vig_solaris=$ORACLE_VGN_BASE/StoryServer/R4.2/bin/solaris

mkdir "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1"
mkdir "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/PadArchiveDir"
mkdir "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/PadWorkDir"
mkdir "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/metafiles"

# Untar the template files.  These files may not be needed, but it
# does not appear to hurt to have them

current_dir=`pwd`
cd "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1"
tar xf "${vig_source}/templates.tar"
cd $current_dir

chown -R nobody:nobody "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1"
chown -R nobody:nobody "${ORACLE_VGN_BASE}/StoryServer"
chown -R nobody:nobody "${ORACLE_VGN_BASE}/cas-docs"

. $INSTALL_HOME/echodbg.sh "configuring"
${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/StoryServer.cfg"
cat "${vig_source}/StoryServer.cfg" | \
    sed "s+V_I_G+${VIGNETTE}+g" | cat | \

```

```

sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+\"g | cat | \
sed "s+P_O_R_T_A_P_A_C_H_E+${PORT_APACHE}+\"g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+\"g \
> "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/StoryServer.cfg"
chown ${VIGNETTE}:${GROUPNAME}
"${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/StoryServer.cfg"

. $INSTALL_HOME/echodbg.sh "configuring
${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/admin"
cat "${vig_source}/admin" | \
sed "s+V_I_G+${VIGNETTE}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+\"g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+\"g \
> "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/admin"
chown ${VIGNETTE}:${GROUPNAME} "${vig_dir}/conf/${hostname}-${APACHE_BASE}01-1/admin"

. $INSTALL_HOME/echodbg.sh "configuring ${vig_dir}/conf/delivery.tcl"
cat "${vig_source}/delivery.tcl" | \
sed "s+V_I_G+${VIGNETTE}+\"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+\"g | cat | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+\"g | cat | \
sed "s+D_O_M_A_I_N+${domain}+\"g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+\"g \
> "${vig_dir}/conf/delivery.tcl"
chown ${VIGNETTE}:${GROUPNAME} "${vig_dir}/conf/delivery.tcl"

. $INSTALL_HOME/echodbg.sh "configuring ${vig_dir}/conf/Production/pm.cfg"
cat "${vig_source}/pm.cfg" | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+\"g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+\"g | cat | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+\"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+\"g | cat | \
sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+\"g | cat | \

```

```

sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
sed "s+V_H_S_P_O_R_T+${VHS_PORT}+"g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+"g \
> "${vig_dir}/conf/Production/pm.cfg"
chown ${VIGNETTE}:${GROUPNAME} "${vig_dir}/conf/Production/pm.cfg"

```

```

. $INSTALL_HOME/echodbg.sh "configuring ${vig_dir}/conf/Production/admin"
cat "${vig_source}/Prod_admin" | \
sed "s+V_I_G+${VIGNETTE}+"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+"g | cat | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+"g | cat | \
sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+"g | cat | \
sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+"g \
> "${vig_dir}/conf/Production/admin"
chown ${VIGNETTE}:${GROUPNAME} "${vig_dir}/conf/Production/admin"

```

```

. $INSTALL_HOME/echodbg.sh "configuring ${vig_solaris}/S97StoryServer4"
cat "${vig_source}/S97StoryServer4" | \
sed "s+V_I_G+${VIGNETTE}+"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+"g | cat | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+"g | cat | \
sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+"g | cat | \
sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+"g \
> "${vig_solaris}/S97StoryServer4"

```

```

. $INSTALL_HOME/echodbg.sh "configuring ${vig_solaris}/S97StoryServer5"
cat "${vig_source}/S97StoryServer5" | \
sed "s+V_I_G+${VIGNETTE}+"g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+"g | cat | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+"g | cat | \
sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+"g | cat | \
sed "s+H_O_S_T_N_A_M_E+${hostname}+"g | cat | \
sed "s+D_O_M_A_I_N+${domain}+"g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+"g \
> "${vig_solaris}/S97StoryServer5"

```

```

#cp "${vig_solaris}/S97StoryServer4" /etc/init.d/StoryServer4
#ln -s "${vig_solaris}/S97StoryServer4" /etc/rc3.d/S97StoryServer4

```



```
#ln -s "${vig_solaris}/S97StoryServer5" /etc/rc3.d/S97StoryServer5
#ln -s "${vig_solaris}/S97StoryServer4" /etc/rc1.d/K01StoryServer4
#ln -s "${vig_solaris}/S97StoryServer5" /etc/rc1.d/K01StoryServer5
#chmod +x /etc/rc3.d/S97StoryServer4
#chmod +x /etc/rc1.d/K01StoryServer4
```

```
chown ${VIGNETTE}:%GROUPNAME "${vig_solaris}/stopCASVIGN"
```

```
. $INSTALL_HOME/echodbg.sh "configuring ${vig_solaris}/stopCASVIGN"
cat "${vig_source}/stopCASVIGN" | \
    sed "s+V_I_G+${VIGNETTE}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+g | cat | \
    sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+g | cat | \
    sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+g | cat | \
    sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g \
    > "${vig_solaris}/stopCASVIGN"
```

```
chown ${VIGNETTE}:%GROUPNAME "${vig_solaris}/stopCASVIGN"
```

```
. $INSTALL_HOME/echodbg.sh "configuring ${vig_solaris}/startCASVIGN"
cat "${vig_source}/startCASVIGN" | \
    sed "s+V_I_G+${VIGNETTE}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+g | cat | \
    sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+g | cat | \
    sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+g | cat | \
    sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g \
    > "${vig_solaris}/startCASVIGN"
```

```
chown ${VIGNETTE}:%GROUPNAME "${vig_solaris}/startCASVIGN"
```

```
. $INSTALL_HOME/echodbg.sh "configuring ${vig_solaris}/startCMSVIGN"
cat "${vig_source}/startCMSVIGN" | \
    sed "s+V_I_G+${VIGNETTE}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+g | cat | \
    sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+g | cat | \
    sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+g | cat | \
    sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g \
    > "${vig_solaris}/startCMSVIGN"
```

```
chown ${VIGNETTE}:%GROUPNAME "${vig_solaris}/startCMSVIGN"
```

```

. $INSTALL_HOME/echodbg.sh "configuring ${vig_solaris}/stopCMSVIGN"
cat "${vig_source}/stopCMSVIGN" | \
    sed "s+V_I_G+${VIGNETTE}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+g | cat | \
    sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+g | cat | \
    sed "s+A_P_A_C_H_E_B_A_S_E+${APACHE_BASE}+g | cat | \
    sed "s+D_O_M_A_I_N+${domain}+g | cat | \
    sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g \
    > "${vig_solaris}/stopCMSVIGN"
chown ${VIGNETTE}:${GROUPNAME} "${vig_solaris}/stopCMSVIGN"

. $INSTALL_HOME/echodbg.sh "configureVignette.sh completed"

```

CONFIDENTIAL

```

#!/bin/ksh
# Filename      install_vgn.sh
# Author        RWessa
# Date          2/7/2000
# Description    installation script for iPrototype
#               Called by main, and installs the Apache and
#               Vignette components.
#
# Parameters    None
# Usage         This script SHOULD NOT be called directly.
#               Instead, you should call setup, answer
#               the necessary questions, and let setup
#               call main which calls this script.
#
# =====
#
#
# *****
# Do not edit this file.
# *****

. $INSTALL_HOME/echodbg.sh " entering install_vgn.sh ..."

if [ "$INSTALL_TYPE" = "V" ] || [ "$INSTALL_TYPE" = "F" ] ; then
. $INSTALL_HOME/echodbg.sh " starting install for INSTALL_TYPE=$INSTALL_TYPE ..."
. $INSTALL_HOME/echodbg.sh "Performing Apache and Vignette install ..."

. $INSTALL_HOME/echodbg.sh "Running scripts to untar setup files"
. $INSTALL_HOME/echodbg.sh ""
. $INSTALL_HOME/unTar_vgn.sh

# . $INSTALL_HOME/echodbg.sh "Running scripts to create links needed for proper
operation"
# . $INSTALL_HOME/echodbg.sh ""
#. $INSTALL_HOME/setLinks.sh
#read ans?"hit enter to continue "

. $INSTALL_HOME/echodbg.sh ""
. $INSTALL_HOME/echodbg.sh "Running scripts to create users. Be sure to set passwords
for these"
. $INSTALL_HOME/echodbg.sh "accounts"

```

```

. $INSTALL_HOME/createUsers_vgn.sh
. $INSTALL_HOME/createUsers_ap.sh

. $INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/echodbg.sh "Removing old SCCS files"
#. $INSTALL_HOME/fixSCCS

. $INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/echodbg.sh "POZ" "Setting file ownership to the proper users"
. $INSTALL_HOME/setOwners_vgn.sh

#. $INSTALL_HOME/echodbg.sh "Create initialization scripts"
#. $INSTALL_HOME/echodbg.sh " "
#. $INSTALL_HOME/setInit.sh
#read ans?"hit enter to continue "

. $INSTALL_HOME/echodbg.sh "Configuring Vignette" 4
. $INSTALL_HOME/configureVignette.sh

. $INSTALL_HOME/echodbg.sh "Configuring Apache Web Server" 4
. $INSTALL_HOME/echodbg.sh " "
. $INSTALL_HOME/configureApache.sh

#. $INSTALL_HOME/echodbg.sh "Update Netp and startup database and listener"
#. $INSTALL_HOME/echodbg.sh " "
#. $INSTALL_HOME/updateNetp
#su - ${ORACLE} -c "startNET${oracle_sid}"
#read ans?"hit enter to continue "

. $INSTALL_HOME/echodbg.sh "Re-configuring Vignette" 4
. $INSTALL_HOME/reconfigVignette.sh

#. $INSTALL_HOME/echodbg.sh "Shutdown database"
#. $INSTALL_HOME/echodbg.sh " "
#su - ${ORACLE} -c "stopDB${oracle_sid}"
#su - ${ORACLE} -c "stopNET${oracle_sid}"
#read ans?"hit enter to continue "

#. $INSTALL_HOME/echodbg.sh "Clean up the file system"
#. $INSTALL_HOME/echodbg.sh " "
#. $INSTALL_HOME/cleanupScripts.sh

```

```
#read ans?"hit enter to continue "

#. $INSTALL_HOME/echodbg.sh "Startup ispeed instance"
#. $INSTALL_HOME/echodbg.sh " "
#/etc/rc3.d/S90${oracle_sid}
#read ans?"hit enter to continue "

echo "Vignette VHS Port $VHS_PORT" >> $SUMMARY_FILE

#. $INSTALL_HOME/echodbg.sh "change passwords"
#. $INSTALL_HOME/echodbg.sh " "
#. $INSTALL_HOME/setPasswords.sh

else
echo "install_vgn.sh was called incorrectly: INSTALL_TYPE=$INSTALL_TYPE"

fi
```

```

#!/bin/ksh
# Filename:          createUsers_i.sh
# Utility for creating Middle Tier user accounts for iSpeed systems
#
# Description:
#   This script is called by the setup.sh script, the main script
#   which performs the iPrototype installation. It creates the
#   user, user directory, shell scripts and group. If any of these
#   exist already, it displays a message to that effect and continues.
#   It will not cause an error and stop the setup.sh script.
#
#   This script should not be called directly. It relies on
#   variables defined by the setup.sh script.
#
#   The issue is what do you do if the user account already exists?
#   At this point nothing. :)
#

echo " "
echo "Adding the user group $GROUPNAME. Ignore warnings if the group already exists"
echo " "
groupadd $GROUPNAME
if ! [ -d $USER_BASE_DIR ]
then
    mkdir $USER_BASE_DIR
fi

echo " "
echo "Adding users.... if there are any errors creating users, verify that"
echo "..... that the problem is not critical"
echo " "

useradd -g $GROUPNAME -d $USER_BASE_DIR/$ICS -s /bin/ksh $ICS

mkdir $USER_BASE_DIR/$ICS

echo "Completed adding user $ICS"
echo "... now adding profiles"
echo " "

#
# Copy startup and shutdown scripts over to the ICS home directory

```

```

#
cp ${INSTALL_HOME}/templates/ics/startWEB $USER_BASE_DIR/$ICS
cp ${INSTALL_HOME}/templates/ics/stopWEB $USER_BASE_DIR/$ICS

chmod +x "$USER_BASE_DIR/${ICS}/startWEB"
chmod +x "$USER_BASE_DIR/${ICS}/stopWEB"

cat ${INSTALL_HOME}/templates/ics/profile | \
    sed "s+D_O_M_A_I_N+${domain}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_B_A_S_E+${ORACLE_OAS_BASE}+g | cat | \
    sed "s+O_A_S_S_I_T_E_N_A_M_E+${OAS_SITE_NAME}+g | cat | \
    sed "s+O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E+${ORACLE_OAS_PROD_BASE}+g | cat | \
    sed "s+I_C_S+${ICS}+g \
    > "$USER_BASE_DIR/${ICS}/.profile"

# Change ownership of the files just created

chown -R $ICS:$GROUPNAME      $USER_BASE_DIR/$ICS

```

```

#!/bin/ksh
# Filename:          createUsers_ap.sh
# Utility for creating Apache user account for iSpeed systems
#
# Description:
#   This script is called by the setup.sh script, the main script
#   which performs the iPrototype installation. It creates the
#   user, user directory, shell scripts and group. If any of these
#   exist already, it displays a message to that effect and continues.
#   It will not cause an error and stop the setup.sh script.
#
#   This script should not be called directly. It relies on
#   variables defined by the setup.sh script.
#
#   The issue is what do you do if the user account already exists?
#   At this point nothing. :)
#

echo " "
echo "Adding the user group $GROUPNAME. Ignore warnings if the group already exists" #
LTF - spelling error 9/17/99
echo " "
groupadd $GROUPNAME
if ! [ -d $USER_BASE_DIR ]
then
    mkdir $USER_BASE_DIR
fi

echo " "
echo "Adding users.... if there are any errors creating users, verify that"
echo "..... that the problem is not critical"
echo " "

useradd -g $GROUPNAME -d $USER_BASE_DIR/$APACHE -s /bin/ksh $APACHE

mkdir $USER_BASE_DIR/$APACHE

echo "Completed adding user $APACHE"
echo "... now adding profiles"
echo " "

```



```
cat ${INSTALL_HOME}/templates/apache/startApache | \
sed "s+O_R_A_C_L_E_A_P_B_A_S_E+${ORACLE_AP_BASE}+g \
> "$USER_BASE_DIR/${APACHE}/startApache"
chmod +x "$USER_BASE_DIR/${APACHE}/startApache"
```

```
cat ${INSTALL_HOME}/templates/apache/stopApache | \
sed "s+O_R_A_C_L_E_A_P_B_A_S_E+${ORACLE_AP_BASE}+g \
> "$USER_BASE_DIR/${APACHE}/stopApache"
chmod +x "$USER_BASE_DIR/${APACHE}/stopApache"
```

```
# Change ownership of the files just created
```

```
chown -R $APACHE:$GROUPNAME $USER_BASE_DIR/$APACHE
```

```

#!/bin/ksh
# Filename:          createUsers_np.sh
# Utility for creating NetP user account for iSpeed systems
#
# Description:
#   This script is called by the setup.sh script, the main script
#   which performs the iPrototype installation. It creates the
#   user, user directory, shell scripts and group. If any of these
#   exist already, it displays a message to that effect and continues.
#   It will not cause an error and stop the setup.sh script.
#
#   This script should not be called directly. It relies on
#   variables defined by the setup.sh script.
#
#   The issue is what do you do if the user account already exists?
#   At this point nothing. :)
#
echo " "
echo "Adding the user group $GROUPNAME. Ignore warnings if the group already exists"
echo " "
groupadd $GROUPNAME
if ! [ -d $USER_BASE_DIR ]
then
    mkdir $USER_BASE_DIR
fi

echo " "
echo "Adding users.... if there are any errors creating users, verify that"
echo "..... that the problem is not critical"
echo " "

useradd -g $GROUPNAME -d $USER_BASE_DIR/$NETP -s /bin/ksh $NETP

mkdir $USER_BASE_DIR/$NETP

echo "Completed adding the user $NETP"
echo "... now adding profiles"
echo " "

cat ${INSTALL_HOME}/templates/netp/stopNETP | \
sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+g \

```

```

> "$USER_BASE_DIR/${NETP}/stopNETP"

cat ${INSTALL_HOME}/templates/netp/startNETP | \
sed "s+O_R_A_C_L_E_N_P_B_A_S_E+${ORACLE_NP_BASE}+g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${oracle_sid}+g | cat | \
sed "s+I_C_S+${ICS}+g | cat | \
sed "s+O_R_A_C_L_E_U_S_E_R+${ORACLE}+g \
> "$USER_BASE_DIR/${NETP}/startNETP"

chmod +x "$USER_BASE_DIR/${NETP}/startNETP"
chmod +x "$USER_BASE_DIR/${NETP}/stopNETP"
#

# Change ownership of the files just created

chown -R $NETP:$GROUPNAME      $USER_BASE_DIR/$NETP

```

```

#!/bin/ksh
# Filename:          createUsers_db.sh
# Utility for creating Oracle user account for iSpeed systems
#
# Description:
#   This script is called by the setup.sh script, the main script
#   which performs the iPrototype installation. It creates the
#   user, user directory, shell scripts and group. If any of these
#   exist already, it displays a message to that effect and continues.
#   It will not cause an error and stop the setup.sh script.
#
#   This script should not be called directly. It relies on
#   variables defined by the setup.sh script.
#
#   The issue is what do you do if the user account already exists?
#   At this point nothing. :)
#
# =====
# Revision History
# Date           Who           Why
# 01/31/2000  rwessa          Initial create date
#
# =====

$INSTALL_HOME/echodbg.sh "Adding user group $GROUPNAME. Ignore warnings if the group
already exists." 4
groupadd $GROUPNAME
if ! [ -d $USER_BASE_DIR ]
then
    $INSTALL_HOME/echodbg.sh "The base user directory $USER_BASE_DIR will be created..." 4
    mkdir $USER_BASE_DIR
else
    $INSTALL_HOME/echodbg.sh "The base user directory $USER_BASE_DIR already exists ..." 4
fi

$INSTALL_HOME/echodbg.sh "Adding user $ORACLE..." 4
useradd -g $GROUPNAME -d $USER_BASE_DIR/$ORACLE -s /bin/ksh $ORACLE
if [ "$?" = "9" ] ; then
    $INSTALL_HOME/echodbg.sh "User $ORACLE exists. Verify that is the desired username!" 4
fi

mkdir $USER_BASE_DIR/$ORACLE

```

```

$INSTALL_HOME/echodbg.sh "User $ORACLE created." 4

$INSTALL_HOME/echodbg.sh "Creating $USER_BASE_DIR/${ORACLE}/.profile." 4
cat ${INSTALL_HOME}/templates/oracle/profile | \
    sed "s+D_O_M_A_I_N+${domain}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g | cat | \
    sed "s+O_R_A_C_L_E_B_A_S_E+${ORACLE_BASE}+g | cat | \
    sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g | cat | \
    sed "s+H_O_S_T_N_A_M_E+${hostname}+g | cat | \
    sed "s+I_C_S+${ICS}+g \
> "$USER_BASE_DIR/${ORACLE}/.profile"

#
# Copy startup and shutdown scripts over to the Oracle home directory
#
$INSTALL_HOME/echodbg.sh "Creating startCTX and stopCTX scripts ..." 4
cp ${INSTALL_HOME}/templates/oracle/startCTX $USER_BASE_DIR/$ORACLE
cp ${INSTALL_HOME}/templates/oracle/stopCTX $USER_BASE_DIR/$ORACLE

$INSTALL_HOME/echodbg.sh "Creating $USER_BASE_DIR/${ORACLE}/startNET${oracle_sid}..." 4
cat ${INSTALL_HOME}/templates/oracle/startNET | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g \
> "$USER_BASE_DIR/${ORACLE}/startNET${oracle_sid}"

$INSTALL_HOME/echodbg.sh "Creating $USER_BASE_DIR/${ORACLE}/stopNET${oracle_sid}..." 4
cat ${INSTALL_HOME}/templates/oracle/stopNET | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g \
> "$USER_BASE_DIR/${ORACLE}/stopNET${oracle_sid}"

$INSTALL_HOME/echodbg.sh "Creating $USER_BASE_DIR/${ORACLE}/startDB${oracle_sid}..." 4
cat ${INSTALL_HOME}/templates/oracle/startDB | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g | cat | \
    sed "s+o_r_a_c_l_e_s_i_d+${oracle_sid}+g | cat | \
    sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g \
> "$USER_BASE_DIR/${ORACLE}/startDB${oracle_sid}"

$INSTALL_HOME/echodbg.sh "Creating $USER_BASE_DIR/${ORACLE}/stopDB${oracle_sid}..." 4
cat ${INSTALL_HOME}/templates/oracle/stopDB | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g \
> "$USER_BASE_DIR/${ORACLE}/stopDB${oracle_sid}"

```



```

#!/bin/ksh
# Filename:          createUsers_vgn.sh
# Utility for creating the Vignette user accounts for iSpeed systems
# Written by Lane Findley 8/1/99
#       Oracle Corporation
#
#
# This is a very simple routine that will generate errors in many cases.
# The issue is what do you do if the user account already exists?
# At this point nothing. :)
#
# Do not call this script directly.  It should be called from the main
# setup.sh script.
#
# =====
# Revision History
# Date
# 03/14/2000 rwessa          Redone for iPrototype Phase 2.
# =====

echo " "
echo "Adding the $GROUPNAME group. Ignore warnings if the group already exists"
echo " "
groupadd $GROUPNAME
if ! [ -d $USER_BASE_DIR ]
then
    mkdir $USER_BASE_DIR
fi

echo " "
echo "Adding users.... if there are any errors creating users, verify that"
echo "..... that the problem is not critical"
echo " "

useradd -g $GROUPNAME -d $USER_BASE_DIR/$VIGNETTE -s /bin/ksh $VIGNETTE

mkdir $USER_BASE_DIR/$VIGNETTE

echo "Completed adding the user $VIGNETTE"
echo "... now adding profiles"
echo " "

```

```
cat ${INSTALL_HOME}/templates/vignette/startVignette | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+"g \
> "$USER_BASE_DIR/${VIGNETTE}/startVignette"
chmod +x "$USER_BASE_DIR/${VIGNETTE}/startVignette"
```

```
cat ${INSTALL_HOME}/templates/vignette/stopVignette | \
sed "s+O_R_A_C_L_E_V_G_N_B_A_S_E+${ORACLE_VGN_BASE}+"g \
> "$USER_BASE_DIR/${VIGNETTE}/stopVignette"
chmod +x "$USER_BASE_DIR/${VIGNETTE}/stopVignette"
```

```
# Change ownership of the files just created
```

```
chown -R $VIGNETTE:$GROUPNAME $USER_BASE_DIR/$VIGNETTE
```



```

#!/bin/ksh
# Filename: echodbg.sh
#
# Author:      Robert Wessa
#              Northeast eBusiness Center
#              Oracle Corporation
#
# Description:
#
# This script is may be called from the main setup.sh script
# which installs iPrototype.  It should not be called directly
#
# This script can be used to pause the installation process and
# to echo information during the installation process.
#
# Parameters:
#
#           $1 = string to echo if
#           $2 = POZ, (for previous version) 1,2,3, 4
#           or string to echo without pausing
#           Explanation of value for $2
#           1 Always and only echo to logfile
#           2 Always echo to logfile and screen
#           3 echo to logfile and screen only if debugging
#           4 echo to logfile and screen, pause if debugging
#           5 echo to logfile and screen, always pause
#           Any other value will log $1 to log file
# =====
# Revision History
# Date
# 03/14/2000 rwessa          Created
# =====

if [ $# = "0" ] ; then
# shouldn't happen
echo "echodbg routine received no parameters, aborting ..."
date
echo "Error: echodbg routine received no parameters..." >> $INSTALL_LOGFILE
date >> $INSTALL_LOGFILE
exit 1
fi

if [ $# = "1" ] ; then
# simply echo to logfile if only one parameter

```

```

echo $1 >> $INSTALL_LOGFILE
else

if [ "$2" = "1" ] ; then
    echo $1 >> $INSTALL_LOGFILE
elif [ "$2" = "2" ] ; then
    echo $1
elif [ "$2" = "3" ] ; then
    if [ "$SHOWDBG" = "YES" ] ; then
        echo $1
        echo $1 >> $INSTALL_LOGFILE
        if [ "$DBGLEVEL" = "1" ] ; then
            echo "Hit return to continue..."
            read ans
        fi
    fi
    echo $1
elif [ "$2" = "4" ] ; then
    echo $1 >> $INSTALL_LOGFILE
    echo $1
    if [ "$SHOWDBG" = "YES" ] ; then
        echo "Hit return to continue..."
        read ans
    fi
elif [ "$2" = "5" ] ; then
    echo $1 >> $INSTALL_LOGFILE
    echo $1
    echo "Hit return to continue..."
    read ans
fi

fi

```



```
#!/bin/ksh
#
#
# Remove dangling links for SCCS embedded in the Apache
# directory tree.

rm `find "${ORACLE_AP_BASE}" -local -name SCCS -print`
```

```

#!/bin/ksh
# Filename: reconfigureVignette.sh
#
# Author:      Robert Wessa
#              Northeast eBusiness Center
#              Oracle Corporation
#
# Description:
#
# This script reconfigures Vignette as part of the cloning process
# It must start up CMS, update the CAS entries, and remove the old
# ones which are invalid and remove the old directories. The new
# CAS directory should have been created during the cloning process
# removes and recreates the appropriate links
#
# Usage:
#
# This script has to run as root and should not be called directly.
# The setup.sh procedure executed at cloning will eventually call this
# if the Vignette option has been chosen.
#
# =====
# Revision History
# Date
# 03/14/2000 rwessa          Created
# =====

CAS_PORT=${PORT_APACHE}

$INSTALL_HOME/echodbg.sh "Entering reconfigVignette.sh" 2
$INSTALL_HOME/echodbg.sh "Starting the CMS & CAS Servers " 4
# use scripts in vignette user home directory
# scripts perform a stop first, then a start
cd $USER_BASE_DIR/$VIGNETTE
$INSTALL_HOME/echodbg.sh "`pwd`" 3
./startVignette # we should start and stop Vignette as root

cd $ORACLE_VGN_BASE/StoryServer/R4.2/bin/solaris
$INSTALL_HOME/echodbg.sh "`pwd`" 3
./sspm listinstalls >> $INSTALL_LOGFILE

set > $INSTALL_HOME/set.log

```

```

$INSTALL_HOME/echodbg.sh "Adding the new CAS to the CMS" 3
$INSTALL_HOME/echodbg.sh "cd
$ORACLE_VGN_BASE/StoryServer/R4.2/conf/${hostname}-${PORT_APACHE}-1" 4
cd $ORACLE_VGN_BASE/StoryServer/R4.2/conf/${hostname}-${PORT_APACHE}-1
$INSTALL_HOME/echodbg.sh "running admin updatepe" 4
$INSTALL_HOME/echodbg.sh "pwd for updatepe=`pwd`" 4
chmod 775 ./admin
./admin updatepe
$INSTALL_HOME/echodbg.sh "updatepe completed" 3

$INSTALL_HOME/echodbg.sh "Removing the old CAS from the CMS " 3
cd $ORACLE_VGN_BASE/StoryServer/R4.2/bin/solaris

# Note if the sspm sspm command prompts you to delete the install,
# You should simply enter <RETURN> at this prompt.
#

$INSTALL_HOME/echodbg.sh " listing sspm commands to delete config and installs..." 4
$INSTALL_HOME/echodbg.sh "`pwd`" 4
$INSTALL_HOME/echodbg.sh "./sspm deleteconfig
${old_hostname}:${ORACLE_VGN_BASE_OLD}/StoryServer/R4.2
${old_hostname}-${CAS_PORT_OLD}-1" 4
$INSTALL_HOME/echodbg.sh "./sspm deleteinstall
${old_hostname}:${ORACLE_VGN_BASE_OLD}/StoryServer/R4.2" 4

./sspm deleteconfig ${old_hostname}:${ORACLE_VGN_BASE_OLD}/StoryServer/R4.2
${old_hostname}-${CAS_PORT_OLD}-1
./sspm deleteinstall ${old_hostname}:${ORACLE_VGN_BASE_OLD}/StoryServer/R4.2

$INSTALL_HOME/echodbg.sh "old CAS entry has been deleted and new entry added." 4
./sspm listinstalls >> $INSTALL_LOGFILE
$INSTALL_HOME/echodbg.sh "reconfigVignette.sh done. `date`" 2

```



```

#!/bin/ksh
# Filename: setPasswords.sh
#
#Description
# This file is called during the iPrototype cloning process.
# It accepts a parameter representing a username for which to set a password.
# If no parameter is supplied, it aborts with an error.
#
# This file is interactive in that you will be prompted for the password.
#
#
. $INSTALL_HOME/echodbg.sh "Setting password for the user $1"
if [ "$1" ] ; then
    passwd $1
else
    echo " No Parameter supplied for setPasswords.sh routine"
    echo " Program aborted."
    exit 1
fi

# create links so that there is only one set of tnsnames.ora and listener.ora files

rm $ORACLE_OAS_PROD_BASE/network/admin/listener.ora
rm $ORACLE_OAS_PROD_BASE/network/admin/tnsnames.ora

ln -s $ORACLE_HOME/network/admin/listener.ora
$ORACLE_OAS_PROD_BASE/network/admin/listener.ora
ln -s $ORACLE_HOME/network/admin/tnsnames.ora
$ORACLE_OAS_PROD_BASE/network/admin/tnsnames.ora

chown $ICS:$GROUPNAME $ORACLE_OAS_PROD_BASE/network/admin/listener.ora
chown $ICS:$GROUPNAME $ORACLE_OAS_PROD_BASE/network/admin/tnsnames.ora

```

```

#!/bin/ksh
#
# Filename: setNet_db.sh
# Author:   rwessa
#          Oracle Corporation
# Description:
#          This file will create the tnsnames.ora and listener.ora file
#          needed in the network admin directory for the $ORACLE_HOME
#          for the database.
#          We no longer use links to create the OAS ORACLE_HOME version,
#          since they may now be on separate machines.
#          Instead, create two identical files based on the same
#          template, with separate create scripts for each. There is a
#          corresponding setNet_i.sh script to create the tnsnames and
#          listener files for OAS.
#
# #####
# Date       Who           Why
# 4/19/2000  rwessa        Created.
#
# #####
echo " "
. $INSTALL_HOME/echodbg.sh "setNet_db.sh: Creating listener.ora and tnsnames.ora..."

cat ${INSTALL_HOME}/templates/oracle/listener.ora | \
sed "s+T_N_S_P_O_R_T+${TNS_PORT}+g | cat | \
sed "s+h_o_s_t_n_a_m_e+${hostname}+g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g \
> "${ORACLE_HOME}/network/admin/listener.ora"

chown ${ORACLE}:${GROUPNAME} "${ORACLE_HOME}/network/admin/listener.ora"
chown ${ORACLE}:${GROUPNAME} "${ORACLE_HOME}/network/admin/listener.ora" >> $scriptfile

cat ${INSTALL_HOME}/templates/oracle/tnsnames.ora | \
sed "s+T_N_S_P_O_R_T+${TNS_PORT}+g | cat | \
sed "s+d_o_m_a_i_n+${domain}+g | cat | \
sed "s+h_o_s_t_n_a_m_e+${hostname}+g | cat | \
sed "s+O_R_A_C_L_E_H_O_M_E+${ORACLE_HOME}+g | cat | \
sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID}+g \
> "${ORACLE_HOME}/network/admin/tnsnames.ora"

chown ${ORACLE}:${GROUPNAME} "${ORACLE_HOME}/network/admin/tnsnames.ora"

```



```

#!/bin/ksh
# Filename1: configureDBna.sh
#
# Description: Reconfigures the cloned database (nademo) for net.genesis.
#              This script should NOT be called directly but needs
#              to be called from the main setup.sh installation script
#              for iPrototype Version 2.
#
# Parameters: Requires special parameters
#              ORACLE_SID_NA
#              oracle_sid_na
#              DB_DATA_DIR_NA
#              DB_ROOT_DIR_NA
#
# #####
# Date       Who       Why
# 5/10/2000  rwessa    Created, based on standard configureDB script
#
# #####

. $INSTALL_HOME/echodbg.sh " entering configureDB.sh ..." 2

scriptfile=$INSTALL_LOGFILE
echo DB_DATA_DIR=$DB_DATA_DIR_NA >> $scriptfile
ls -la $DB_DATA_DIR_NA >> $scriptfile
date >> $scriptfile
set >> $scriptfile
echo " " >> $scriptfile
pwd >> $scriptfile

#mv "$DB_ROOT_DIR_NA/${OLD_ORACLE_SID}" "${DB_DATA_DIR}/${ORACLE_SID_NA}"
# echo mv "$DB_ROOT_DIR_NA/${OLD_ORACLE_SID}" "${DB_DATA_DIR_NA}/${ORACLE_SID_NA}" >>
$scriptfile
#chown "${ORACLE}":$GROUPNAME "${DB_DATA_DIR_NA}/${ORACLE_SID_NA}"
# echo chown "${ORACLE}":$GROUPNAME "${DB_DATA_DIR_NA}/${ORACLE_SID_NA}" >> $scriptfile
mv "${ORACLE_BASE}/admin/${OLD_ORACLE_SID}" "${ORACLE_BASE}/admin/${ORACLE_SID_NA}"
echo mv "${ORACLE_BASE}/admin/${OLD_ORACLE_SID}" "${ORACLE_BASE}/admin/${ORACLE_SID_NA}"
>> $scriptfile
rm "${DB_DATA_DIR_NA}/rdo11${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR_NA}/rdo11${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR_NA}/rdo12${OLD_ORACLE_SID}.dbf"

```

```

echo rmstat $? "${DB_DATA_DIR_NA}/rdo12${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR_NA}/rdo13${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR_NA}/rdo13${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR_NA}/rdo21${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR_NA}/rdo21${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR_NA}/rdo22${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR_NA}/rdo22${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR_NA}/rdo23${OLD_ORACLE_SID}.dbf"
echo rmstat $? "${DB_DATA_DIR_NA}/rdo23${OLD_ORACLE_SID}.dbf" >> $scriptfile
rm "${DB_DATA_DIR_NA}/ctl11${OLD_ORACLE_SID}.ctl"
echo rmstat $? "${DB_DATA_DIR_NA}/ctl11${OLD_ORACLE_SID}.ctl" >> $scriptfile
rm "${DB_DATA_DIR_NA}/ctl12${OLD_ORACLE_SID}.ctl"
echo rmstat $? "${DB_DATA_DIR_NA}/ctl12${OLD_ORACLE_SID}.ctl" >> $scriptfile

```

```

cd "${DB_DATA_DIR_NA}"
cd "${DB_DATA_DIR_NA}" >> $scriptfile
pwd >> $scriptfile
for source in *.dbf
do
    destination=`echo ${source} | sed "s/${OLD_ORACLE_SID}/${ORACLE_SID_NA}/"`
    if [ "${source}" != "${destination}" ]
    then
        echo "\tRenaming ${source} to ${destination}..." >> $scriptfile
        echo mv ${source} "${destination}" >> $scriptfile
        mv ${source} "${destination}"
        echo $? Move status for ${source} "${destination}" >> $scriptfile
    fi
    chown ${ORACLE}:%GROUPNAME "${destination}"
    chown ${ORACLE}:%GROUPNAME "${destination}" >> $scriptfile
done

```

```

. $INSTALL_HOME/echodbg.sh "creating
${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/config${ORACLE_SID_NA}.ora ..." 4
cat ${INSTALL_HOME}/templates/oracle/configDB.ora | \
    sed "s+D_B_D_A_T_A_D_I_R+${DB_DATA_DIR_NA}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID_NA}+g | cat | \
    sed "s+O_R_A_C_L_E_B_A_S_E+${ORACLE_BASE}+g \
    > "${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/config${ORACLE_SID_NA}.ora"
chown ${ORACLE}:%GROUPNAME
"${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/config${ORACLE_SID_NA}.ora"
echo chown ${ORACLE}:%GROUPNAME
"${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/config${ORACLE_SID_NA}.ora" >> $scriptfile

```

```

ln -s "${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/config${ORACLE_SID_NA}.ora" \
    "${ORACLE_HOME}/dbs/config${ORACLE_SID_NA}.ora"
echo ln -s "${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/config${ORACLE_SID_NA}.ora" \
    "${ORACLE_HOME}/dbs/config${ORACLE_SID_NA}.ora" >> $scriptfile

. $INSTALL_HOME/echodbg.sh "creating
${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/init${ORACLE_SID_NA}.ora" 4
cat ${INSTALL_HOME}/templates/oracle/initDB.ora | \
    sed "s+D_B_D_A_T_A_D_I_R+${DB_DATA_DIR_NA}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID_NA}+g | cat | \
    sed "s+O_R_A_C_L_E_B_A_S_E+${ORACLE_BASE}+g \
    > "${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/init${ORACLE_SID_NA}.ora"
chown ${ORACLE}:${GROUPNAME}
"${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/init${ORACLE_SID_NA}.ora"
echo chown ${ORACLE}:${GROUPNAME}
"${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/init${ORACLE_SID_NA}.ora" >> $scriptfile

ln -s "${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/init${ORACLE_SID_NA}.ora" \
    "${ORACLE_HOME}/dbs/init${ORACLE_SID_NA}.ora"
echo ln -s "${ORACLE_BASE}/admin/${ORACLE_SID_NA}/pfile/init${ORACLE_SID_NA}.ora" \
    "${ORACLE_HOME}/dbs/init${ORACLE_SID_NA}.ora" >> $scriptfile

. $INSTALL_HOME/echodbg.sh "creating ${DB_DATA_DIR_NA}/cr${ORACLE_SID_NA}ctrl.sql" 4
cat ${INSTALL_HOME}/templates/oracle/crctrl.sql | \
    sed "s+D_B_D_A_T_A_D_I_R+${DB_DATA_DIR_NA}+g | cat | \
    sed "s+O_R_A_C_L_E_S_I_D+${ORACLE_SID_NA}+g | cat | \
    sed "s+O_R_A_C_L_E_B_A_S_E+${ORACLE_BASE}+g \
    > "${DB_DATA_DIR_NA}/cr${ORACLE_SID_NA}ctrl.sql"
chown ${ORACLE}:${GROUPNAME} "${DB_DATA_DIR_NA}/cr${ORACLE_SID_NA}ctrl.sql"

# Use svrmgr to create new control files
. $INSTALL_HOME/echodbg.sh "Attempting to run svrmgr to create control files..." 4
su - ${ORACLE} -c "
ORACLE_SID=${ORACLE_SID_NA}
ORAENV_ASK=NO
cat "${DB_DATA_DIR_NA}/cr${ORACLE_SID_NA}ctrl.sql" | svrmgrl
"

# Now start database and tns listener
su - ${ORACLE} -c "startDB${oracle_sid_na}"
su - ${ORACLE} -c "startNET${oracle_sid_na}"

```

```
. $INSTALL_HOME/echodbg.sh "configureDBna.sh completed." 2
```

Variable	Unit	Value
1. α	deg	10
2. β	deg	10
3. γ	deg	10
4. δ	deg	10
5. ϵ	deg	10
6. ζ	deg	10
7. η	deg	10
8. θ	deg	10
9. ϕ	deg	10
10. χ	deg	10
11. ψ	deg	10
12. ω	deg	10
13. ν	deg	10
14. μ	deg	10
15. λ	deg	10
16. κ	deg	10
17. ι	deg	10
18. \hbar	deg	10
19. g	deg	10
20. f	deg	10
21. e	deg	10
22. d	deg	10
23. c	deg	10
24. b	deg	10
25. a	deg	10
26. z	deg	10
27. y	deg	10
28. x	deg	10
29. w	deg	10
30. v	deg	10
31. u	deg	10
32. t	deg	10
33. s	deg	10
34. r	deg	10
35. q	deg	10
36. p	deg	10
37. o	deg	10
38. n	deg	10
39. m	deg	10
40. l	deg	10
41. k	deg	10
42. j	deg	10
43. i	deg	10
44. h	deg	10
45. g	deg	10
46. f	deg	10
47. e	deg	10
48. d	deg	10
49. c	deg	10
50. b	deg	10
51. a	deg	10
52. z	deg	10
53. y	deg	10
54. x	deg	10
55. w	deg	10
56. v	deg	10
57. u	deg	10
58. t	deg	10
59. s	deg	10
60. r	deg	10
61. q	deg	10
62. p	deg	10
63. o	deg	10
64. n	deg	10
65. m	deg	10
66. l	deg	10
67. k	deg	10
68. j	deg	10
69. i	deg	10
70. h	deg	10
71. g	deg	10
72. f	deg	10
73. e	deg	10
74. d	deg	10
75. c	deg	10
76. b	deg	10
77. a	deg	10
78. z	deg	10
79. y	deg	10
80. x	deg	10
81. w	deg	10
82. v	deg	10
83. u	deg	10
84. t	deg	10
85. s	deg	10
86. r	deg	10
87. q	deg	10
88. p	deg	10
89. o	deg	10
90. n	deg	10
91. m	deg	10
92. l	deg	10
93. k	deg	10
94. j	deg	10
95. i	deg	10
96. h	deg	10
97. g	deg	10
98. f	deg	10
99. e	deg	10
100. d	deg	10
101. c	deg	10
102. b	deg	10
103. a	deg	10
104. z	deg	10
105. y	deg	10
106. x	deg	10
107. w	deg	10
108. v	deg	10
109. u	deg	10
110. t	deg	10
111. s	deg	10
112		

```

~DIRECTORY: templates\apache\
~~~TEMPLATE: \apache\access.conf
~~~access.conf
# access.conf: Global access configuration
# Online docs at http://www.apache.org/

# This file defines server settings which affect which types of services
# are allowed, and in what circumstances.

# Each directory to which Apache has access, can be configured with respect
# to which services and features are allowed and/or disabled in that
# directory (and its subdirectories).

# Originally by Rob McCool

# First, we configure the "default" to be a very restrictive set of
# permissions.

<Directory />
Options FollowSymLinks
AllowOverride None
</Directory>

# Note that from this point forward you must specifically allow
# particular features to be enabled - so if something's not working as
# you might expect, make sure that you have specifically enabled it
# below.

# This should be changed to whatever you set DocumentRoot to.

#<Directory "O_R_A_C_L_E_A_P_B_A_S_E/htdocs">
<Directory "O_R_A_C_L_E_V_G_N_B_A_S_E/cas-docs">

# This may also be "None", "All", or any combination of "Indexes",
# "Includes", "FollowSymLinks", "ExecCGI", or "MultiViews".

# Note that "MultiViews" must be named *explicitly* --- "Options All"
# doesn't give it to you.

#Options Indexes FollowSymLinks

# ***** VIGNETTE ADDITIONS *****
Options Indexes FollowSymLinks Includes
# ***** VIGNETTE ADDITIONS *****

# This controls which options the .htaccess files in directories can
# override. Can also be "All", or any combination of "Options", "FileInfo",
# "AuthConfig", and "Limit"

AllowOverride None

# Controls who can get stuff from this server.

order allow,deny
allow from all

</Directory>

# O_R_A_C_L_E_A_P_B_A_S_E/cgi-bin should be changed to whatever your ScriptAliased

```



```

# CGI directory exists, if you have that configured.

<Directory "O_R_A_C_L_E_A_P_B_A_S_E/cgi-bin">
AllowOverride None
Options None
</Directory>

# Allow server status reports, with the URL of http://servername/server-status
# Change the ".your_domain.com" to match your domain to enable.

#<Location /server-status>
#SetHandler server-status

#order deny,allow
#deny from all
#allow from .your_domain.com
#</Location>

# Allow remote server configuration reports, with the URL of
# http://servername/server-info (requires that mod_info.c be loaded).
# Change the ".your_domain.com" to match your domain to enable.

#<Location /server-info>
#SetHandler server-info

#order deny,allow
#deny from all
#allow from .your_domain.com
#</Location>

# There have been reports of people trying to abuse an old bug from pre-1.1
# days. This bug involved a CGI script distributed as a part of Apache.
# By uncommenting these lines you can redirect these attacks to a logging
# script on phf.apache.org. Or, you can record them yourself, using the script
# support/phf_abuse_log.cgi.

#<Location /cgi-bin/phf*>
#deny from all
#ErrorDocument 403 http://phf.apache.org/phf_abuse_log.cgi
#</Location>

# You may place any other directories or locations you wish to have
# access information for after this one.

# ***** VIGNETTE ADDITIONS *****
<Location /ServerSideFunction/>
SetHandler ServerSideFunction
allow from all
</Location>
# ***** VIGNETTE ADDITIONS *****
~~~TEMPLATE: \apache\apachectl
~~~apachectl
#!/bin/sh
#
# Apache control script designed to allow an easy command line interface
# to controlling Apache. Written by Marc Slemko, 1997/08/23
#
# The exit codes returned are:
# 0 - operation completed successfully

```

```

# 1 -
# 2 - usage error
# 3 - httpd could not be started
# 4 - httpd could not be stopped
# 5 - httpd could not be started during a restart
# 6 - httpd could not be restarted during a restart
# 7 - httpd could not be restarted during a graceful restart
# 8 - configuration syntax error
#
# When multiple arguments are given, only the error from the _last_
# one is reported. Run "apachectl help" for usage info
#
#
# ||||| START CONFIGURATION SECTION |||||
# -----
#
# the path to your PID file
#PIDFILE=O_R_A_C_L_E_A_P_B_A_S_E/var/run/httpd.pid
PIDFILE=O_R_A_C_L_E_A_P_B_A_S_E/logs/httpd.pid
#
# the path to your httpd binary, including options if necessary
HTTPD=O_R_A_C_L_E_A_P_B_A_S_E/sbin/httpd
#
# a command that outputs a formatted text version of the HTML at the
# url given on the command line. Designed for lynx, however other
# programs may work.
LYNX="lynx -dump"
#
# the URL to your server's mod_status status page. If you do not
# have one, then status and fullstatus will not work.
STATUSURL="http://localhost/server-status"
#
# -----
# ||||| END CONFIGURATION SECTION |||||

ERROR=0
ARGV="$@"
if [ "x$ARGV" = "x" ] ; then
    ARGS="help"
fi

for ARG in $@ $ARGS
do
    # check for pidfile
    if [ -f $PIDFILE ] ; then
        PID=`cat $PIDFILE`
        if kill -0 $PID; then
            STATUS="httpd (pid $PID) running"
            RUNNING=1
        else
            STATUS="httpd (pid $PID?) not running"
            RUNNING=0
        fi
    else
        STATUS="httpd (no pid file) not running"
        RUNNING=0
    fi

    case $ARG in

```

```

start)
    if [ $RUNNING -eq 1 ]; then
        echo "$0 $ARG: httpd (pid $PID) already running"
        continue
    fi
    if $HTTPD ; then
        echo "$0 $ARG: httpd started"
    else
        echo "$0 $ARG: httpd could not be started"
        ERROR=3
    fi
    ;;
stop)
    if [ $RUNNING -eq 0 ]; then
        echo "$0 $ARG: $STATUS"
        continue
    fi
    if kill $PID ; then
        echo "$0 $ARG: httpd stopped"
    else
        echo "$0 $ARG: httpd could not be stopped"
        ERROR=4
    fi
    ;;
restart)
    if [ $RUNNING -eq 0 ]; then
        echo "$0 $ARG: httpd not running, trying to start"
        if $HTTPD ; then
            echo "$0 $ARG: httpd started"
        else
            echo "$0 $ARG: httpd could not be started"
            ERROR=5
        fi
    else
        if $HTTPD -t >/dev/null 2>&1; then
            if kill -HUP $PID ; then
                echo "$0 $ARG: httpd restarted"
            else
                echo "$0 $ARG: httpd could not be restarted"
                ERROR=6
            fi
        else
            echo "$0 $ARG: configuration broken, ignoring restart"
            echo "$0 $ARG: (run 'apachectl configtest' for details)"
            ERROR=6
        fi
    fi
    ;;
graceful)
    if [ $RUNNING -eq 0 ]; then
        echo "$0 $ARG: httpd not running, trying to start"
        if $HTTPD ; then
            echo "$0 $ARG: httpd started"
        else
            echo "$0 $ARG: httpd could not be started"
            ERROR=5
        fi
    else
        if $HTTPD -t >/dev/null 2>&1; then

```

```

        if kill -USR1 $PID ; then
            echo "$0 $ARG: httpd gracefully restarted"
        else
            echo "$0 $ARG: httpd could not be restarted"
            ERROR=7
        fi
    else
        echo "$0 $ARG: configuration broken, ignoring restart"
        echo "$0 $ARG: (run 'apachectl configtest' for details)"
        ERROR=7
    fi
fi
;;
status)
    $LYNX $STATUSURL | awk ' /process$/ { print; exit } { print } '
    ;;
fullstatus)
    $LYNX $STATUSURL
    ;;
configtest)
    if $HTTPD -t; then
        :
    else
        ERROR=8
    fi
    ;;
*)
    echo "usage: $0 (start|stop|restart|fullstatus|status|graceful|configtest|help) "
    cat <<EOF

start      - start httpd
stop       - stop httpd
restart    - restart httpd if running by sending a SIGHUP or start if
             not running
fullstatus - dump a full status screen; requires lynx and mod_status enabled
status     - dump a short status screen; requires lynx and mod_status enabled
graceful   - do a graceful restart by sending a SIGUSR1 or start if not running
configtest - do a configuration syntax test
help       - this screen

EOF

        ERROR=2
        ;;
    esac

done

exit $ERROR

# =====
# Copyright (c) 1995-1998 The Apache Group. All rights reserved.
#
# Redistribution and use in source and binary forms, with or without
# modification, are permitted provided that the following conditions
# are met:
#
# 1. Redistributions of source code must retain the above copyright
# notice, this list of conditions and the following disclaimer.

```

```
#
# 2. Redistributions in binary form must reproduce the above copyright
# notice, this list of conditions and the following disclaimer in
# the documentation and/or other materials provided with the
# distribution.
#
# 3. All advertising materials mentioning features or use of this
# software must display the following acknowledgment:
# "This product includes software developed by the Apache Group
# for use in the Apache HTTP server project (http://www.apache.org/)."apache@apache.org.
#
# 5. Products derived from this software may not be called "Apache"
# nor may "Apache" appear in their names without prior written
# permission of the Apache Group.
#
# 6. Redistributions of any form whatsoever must retain the following
# acknowledgment:
# "This product includes software developed by the Apache Group
# for use in the Apache HTTP server project (http://www.apache.org/)."http://www.apache.org/>.
#
~~~TEMPLATE: \apache\apxs
~~~apxs
#!no-perl-on-this-system
## =====
## Copyright (c) 1998 The Apache Group. All rights reserved.
##
## Redistribution and use in source and binary forms, with or without
## modification, are permitted provided that the following conditions
## are met:
##
## 1. Redistributions of source code must retain the above copyright
## notice, this list of conditions and the following disclaimer.
##
```

```

## 2. Redistributions in binary form must reproduce the above copyright
## notice, this list of conditions and the following disclaimer in
## the documentation and/or other materials provided with the
## distribution.
##
## 3. All advertising materials mentioning features or use of this
## software must display the following acknowledgment:
## "This product includes software developed by the Apache Group
## for use in the Apache HTTP server project (http://www.apache.org/)."http://www.apache.org/)."http://www.apache.org/>.
##
##
## apxs -- APaChe eXtenSion tool
## Written by Ralf S. Engelschall <rse@apache.org>
##
require 5.003;
use strict;
package apxs;

##
## Configuration
##

```

```

my $CFG_CC          = 'gcc';          # substituted via Makefile.tpl
my $CFG_CFLAGS      = ' -DSOLARIS2=260 `../apaci`';      # substituted via
Makefile.tpl
my $CFG_CFLAGS_SHLIB = ''; # substituted via Makefile.tpl
my $CFG_LD_SHLIB     = ''; # substituted via Makefile.tpl
my $CFG_LDFLAGS_SHLIB = ''; # substituted via Makefile.tpl
my $CFG_LIBS_SHLIB   = ''; # substituted via Makefile.tpl
my $CFG_PREFIX       = 'O_R_A_C_L_E_A_P_B_A_S_E';      # substituted via APACI install
my $CFG_SBINDIR      = 'O_R_A_C_L_E_A_P_B_A_S_E/sbin';   # substituted via APACI
install
my $CFG_INCLUDEDIR   = 'O_R_A_C_L_E_A_P_B_A_S_E/include'; # substituted via APACI
install
my $CFG_LIBEXECDIR    = 'O_R_A_C_L_E_A_P_B_A_S_E/libexec'; # substituted via APACI
install
my $CFG_SYSCONFDIR    = 'O_R_A_C_L_E_A_P_B_A_S_E/etc';    # substituted via APACI install

##
## Cleanup the above stuff
##
$CFG_CFLAGS =~ s|^\\s+||;
$CFG_CFLAGS =~ s|\\s+$||;
$CFG_CFLAGS =~ s|\\s+\\.+apaci`||;

##
## Initial shared object support check
##
if (not grep(/mod_so/, ` $CFG_SBINDIR/httpd -l`)) {
    print STDERR "apxs:Error: Sorry, no shared object support for Apache\\n";
    print STDERR "apxs:Error: available under your platform. Make sure\\n";
    print STDERR "apxs:Error: the Apache module mod_so is compiled into\\n";
    print STDERR "apxs:Error: your server binary ` $CFG_SBINDIR/httpd'.\\n";
    exit(1);
}

##
## parse argument line
##

# defaults for parameters
my $opt_n = '';
my $opt_g = '';
my $opt_c = 0;
my $opt_o = '';
my @opt_D = ();
my @opt_I = ();
my @opt_L = ();
my @opt_l = ();
my $opt_i = 0;
my $opt_a = 0;
my $opt_A = 0;
my $opt_q = 0;

# this subroutine is derived from Perl's getopts.pl with the enhancement of
# the "+" metacharater at the format string to allow a list to be build by
# subsequent occurance of the same option.
sub Getopts {
    my ($argumentative, @ARGV) = @_;
    my (@args, $first, $rest, $pos);
    my ($errs) = 0;

```

```

local ($_);
local ($) = 0;

@args = split( / */, $argumentative);
while(@ARGV && ($_ = $ARGV[0]) =~ /^-(.)(.*)/) {
    ($first, $rest) = ($1,$2);
    if ($_ =~ m|^--$|) {
        shift(@ARGV);
        last;
    }
    $pos = index($argumentative,$first);
    if($pos >= $[]) {
        if($args[$pos+1] eq ':') {
            shift(@ARGV);
            if($rest eq '') {
                unless (@ARGV) {
                    print STDERR "apxs:Error: Incomplete option: $first (needs an
argument)\n";
                    ++$errs;
                }
                $rest = shift(@ARGV);
            }
            eval "\$opt_$first = \"$rest\";";
        }
        elsif ($args[$pos+1] eq '+') {
            shift(@ARGV);
            if($rest eq '') {
                unless (@ARGV) {
                    print STDERR "apxs:Error: Incomplete option: $first (needs an
argument)\n";
                    ++$errs;
                }
                $rest = shift(@ARGV);
            }
            eval "push(@opt_$first, \"$rest\");";
        }
        else {
            eval "\$opt_$first = 1";
            if($rest eq '') {
                shift(@ARGV);
            }
            else {
                $ARGV[0] = "--$rest";
            }
        }
    }
    else {
        print STDERR "apxs:Error: Unknown option: $first\n";
        ++$errs;
        if($rest ne '') {
            $ARGV[0] = "--$rest";
        }
        else {
            shift(@ARGV);
        }
    }
}
return ($errs == 0, @ARGV);
}

```



```

sub usage {
    print STDERR "Usage: apxs -g -n <modname>\n";
    print STDERR "    apxs -q <query> ... \n";
    print STDERR "    apxs -c [-o <dsofile>] [-D <name>[=<value>]] [-I <incdir>]\n";
    print STDERR "    [-L <libdir>] [-l <libname>] <files> ... \n";
    print STDERR "    apxs -i [-a] [-n <modname>] <dsofile> ... \n";
    exit(1);
}

# option handling
my $src;
($src, @ARGV) = &Getopts("qn:gco:I+D+L+l+iaA", @ARGV);
&usage if ($src == 0);
&usage if ($#ARGV == -1 and not $opt_g);
&usage if (not $opt_q and not ($opt_g and $opt_n) and not $opt_i and not $opt_c);

# argument handling
my @args = @ARGV;
my $name = 'unknown';
$name = $opt_n if ($opt_n ne '');

##
## Operation
##

# helper function for executing a list of
# system command with return code checks
sub execute_cmds {
    my (@cmds) = @_;
    my ($cmd, $src);

    foreach $cmd (@cmds) {
        print STDERR "$cmd\n";
        $src = system("$cmd");
        if ($src != 0) {
            printf(STDERR "apxs:Break: Command failed with rc=%d\n", $src << 8);
            exit(1);
        }
    }
}

if ($opt_g) {
    ##
    ## SAMPLE MODULE SOURCE GENERATION
    ##

    if (-d $name) {
        print STDERR "apxs:Error: Directory '$name' already exists. Remove first\n";
        exit(1);
    }

    my $data = join(' ', <DATA>);
    $data =~ s|%NAME%|$name|sg;

    my ($mkf, $src) = ($data =~ m|^(.+)-#=-\n(.+)|s);

    print STDERR "Creating [DIR] $name\n";
    system("mkdir $name");
    print STDERR "Creating [FILE] $name/Makefile\n";
}

```

```

open(FP, ">${name}/Makefile") || die;
print FP $mkf;
close(FP);
print STDERR "Creating [FILE] $name/mod_${name}.c\n";
open(FP, ">${name}/mod_${name}.c") || die;
print FP $src;
close(FP);

exit(0);
}

if ($opt_q) {
    ##
    ##  QUERY INFORMATION
    ##

    my $result = '';
    my $arg;
    foreach $arg (@args) {
        my $ok = 0;
        my $name;
        foreach $name (qw(
            CC LD_SHLIB CFLAGS CFLAGS_SHLIB LDFLAGS_SHLIB
            PREFIX SBINDIR INCLUDEDIR LIBEXECDIR SYSCONFDIR
        )) {
            if ($arg eq $name or $arg eq lc($name)) {
                my $val = eval "\$CFG_${name}";
                $result .= "${val}::";
                $ok = 1;
            }
        }
        if (not $ok) {
            printf(STDERR "apxs:Error: Invalid query string '%s'\n", $arg);
            exit(1);
        }
    }
    $result =~ s|::|$|;
    $result =~ s|::||;
    print $result;
}

if ($opt_c) {
    ##
    ##  SHARED OBJECT COMPILATION
    ##

    #  split files into sources and objects
    my @srcs = ();
    my @objs = ();
    my $f;
    foreach $f (@args) {
        if ($f =~ m|\.c$|) {
            push(@srcs, $f);
        }
        else {
            push(@objs, $f);
        }
    }
}

```

```

#   determine output file
my $dso_file;
if ($opt_o eq '') {
    if ($#srcs > -1) {
        $dso_file = $srcs[0];
        $dso_file =~ s|\.|^\.|+$|.so|;
    }
    elsif ($#objs > -1) {
        $dso_file = $objs[0];
        $dso_file =~ s|\.|^\.|+$|.so|;
    }
    else {
        $dso_file = "mod_unknown.so";
    }
}
else {
    $dso_file = $opt_o;
}

#   create compilation commands
my @cmds = ();
my $opt = '';
my ($opt_I, $opt_D);
foreach $opt_I (@opt_I) {
    $opt .= "-I$opt_I ";
}
foreach $opt_D (@opt_D) {
    $opt .= "-D$opt_D ";
}
my $cflags = "$CFG_CFLAGS $CFG_CFLAGS_SHLIB";
my $s;
foreach $s (@srcs) {
    my $o = $s;
    $o =~ s|\.c$|.o|;
    push(@cmds, "$CFG_CC $cflags -I$CFG_INCLUDEDIR $opt -c $s");
    unshift(@objs, $o);
}

#   create link command
my $cmd = "$CFG_LD_SHLIB $CFG_LDFLAGS_SHLIB -o $dso_file";
my $o;
foreach $o (@objs) {
    $cmd .= " $o";
}
$opt = '';
my ($opt_L, $opt_l);
foreach $opt_L (@opt_L) {
    $opt .= "-L$opt_L";
}
foreach $opt_l (@opt_l) {
    $opt .= "-l$opt_l";
}
$cmd .= $opt;
$cmd .= " $CFG_LIBS_SHLIB";
push(@cmds, $cmd);

#   execute the commands
&execute_cmds(@cmds);

```

```

# allow one-step compilation and installation
if ($opt_i) {
    @args = ( $dso_file );
}
}

if ($opt_i) {
    ##
    ## SHARED OBJECT INSTALLATION
    ##

    # determine installation commands
    # and corresponding LoadModule/AddModule directives
    my @lmd = ();
    my @amd = ();
    my @cmds = ();
    my $f;
    foreach $f (@args) {
        if ($f !~ m|\.so$|) {
            print STDERR "apxs:Error: file $f is not a shared object\n";
            exit(1);
        }
        my $t = $f;
        $t =~ s|^\.+/(|+)$|1|;
        push(@cmds, "cp $f $CFG_LIBEXECDIR/$t");
        push(@cmds, "chmod 755 $CFG_LIBEXECDIR/$t");

        # determine module symbolname and filename
        my $filename = '';
        if ($name eq 'unknown') {
            $name = '';
            my $base = $f;
            $base =~ s|\.|.|+|;
            if (-f "$base.c") {
                open(FP, "<$base.c");
                my $content = join('', <FP>);
                close(FP);
                if ($content =~
m|.*module\s+(?:MODULE_VAR_EXPORT\s+)?([a-zA-Z0-9_]+)_module\s*=\s*.*|s) {
                    $name = "$1";
                    $filename = "$base.c";
                    $filename =~ s|^[/|+|/|];
                }
            }
            if ($name eq '') {
                if ($base =~ m|.*mod_([a-zA-Z0-9_]+)\.|) {
                    $name = "$1";
                    $filename = $base;
                    $filename =~ s|^[/|+|/|];
                }
            }
            if ($name eq '') {
                print "apxs:Error: Sorry, cannot determine bootstrap symbol name\n";
                print "apxs:Error: Please specify one with option ~-n'\n";
                exit(1);
            }
        }
        if ($filename eq '') {
            $filename = "mod_${name}.c";
        }
    }
}

```

```

    }
    my $dir = $CFG_LIBEXECDIR;
    $dir =~ s|^$CFG_PREFIX/?||;
    $dir =~ s|^(\.)/$1/|;
    push(@lmd, sprintf("LoadModule %-18s %s", "${name}_module", "$dir$t"));
    push(@amd, sprintf("AddModule %s", $filename));
}

# execute the commands
&execute_cmds(@cmds);

# activate module via LoadModule/AddModule directive
if ($opt_a or $opt_A) {
    if (not -f "$CFG_SYSCONFDIR/httpd.conf") {
        print STDERR "apxs:Error: Config file $CFG_SYSCONFDIR/httpd.conf not found\n";
        exit(1);
    }

    open(FP, "<$CFG_SYSCONFDIR/httpd.conf") || die;
    my $content = join('', <FP>);
    close(FP);

    if ($content !~ m|\n#\s*LoadModule\s+|) {
        print STDERR "apxs:Error: Activation failed for custom
$CFG_SYSCONFDIR/httpd.conf file.\n";
        print STDERR "apxs:Error: At least one `LoadModule' directive already has to
exist.\n";
        exit(1);
    }

    my $update = 0;
    my $lmd;
    foreach $lmd (@lmd) {
        if ($content !~ m|\n#\s*$lmd|) {
            my $c = '';
            $c = '#' if ($opt_A);
            $content =~ s|^(\.*/\s*LoadModule\s+[\n]+\n)|$1$c$lmd\n|sg;
            $update = 1;
            $lmd =~ m|LoadModule\s+(.*)_module.*|;
            my $what = $opt_A ? "preparing" : "activating";
            print STDERR "[$what module `$1' in $CFG_SYSCONFDIR/httpd.conf]\n";
        }
    }
    my $amd;
    foreach $amd (@amd) {
        if ($content !~ m|\n#\s*$amd|) {
            my $c = '';
            $c = '#' if ($opt_A);
            $content =~ s|^(\.*/\s*AddModule\s+[\n]+\n)|$1$c$amd\n|sg;
            $update = 1;
        }
    }
    if ($update) {
        open(FP, ">$CFG_SYSCONFDIR/httpd.conf.new") || die;
        print FP $content;
        close(FP);
        system("cp $CFG_SYSCONFDIR/httpd.conf $CFG_SYSCONFDIR/httpd.conf.bak && " .
            "cp $CFG_SYSCONFDIR/httpd.conf.new $CFG_SYSCONFDIR/httpd.conf && " .
            "rm $CFG_SYSCONFDIR/httpd.conf.new");
    }
}

```

```

    }
}

##EOF##
__DATA__
##
## Makefile -- Apache for sample %NAME% module
## Autogenerated via ``apxs -n %NAME% -g``.
##

# the used tools
APXS=apxs
APACHECTL=apachectl

# additional defines, includes and libraries
#DEF=-Dmy_define=my_value
#INC=-Imy/include/dir
#LIB=-Lmy/lib/dir -lmylib

# the default target
all: mod_%NAME%.so

# compile the shared object file
mod_%NAME%.so: mod_%NAME%.c
    $(APXS) -c $(DEF) $(INC) $(LIB) mod_%NAME%.c

# install the shared object file into Apache
install: all
    $(APXS) -i -a -n '%NAME%' mod_%NAME%.so

# cleanup
clean:
    -rm -f mod_%NAME%.o mod_%NAME%.so

# simple test
test: reload
    lynx -mime_header http://localhost/%NAME%

# install and activate shared object by reloading Apache to
# force a reload of the shared object file
reload: install restart

# the general Apache start/restart/stop
# procedures
start:
    $(APACHECTL) start
restart:
    $(APACHECTL) restart
stop:
    $(APACHECTL) stop

-#=-
/*
** mod_%NAME%.c -- Apache sample %NAME% module
** [Autogenerated via ``apxs -n %NAME% -g``]
**
** To play with this sample module first compile it into a
** DSO file and install it into Apache's libexec directory

```

```

** by running:
**
** $ apxs -c -i mod_%NAME%.c
**
** Then activate it in Apache's httpd.conf file for instance
** for the URL /%NAME% in as follows:
**
** # httpd.conf
** LoadModule %NAME%_module libexec/mod_%NAME%.so
** <Location /%NAME%>
** SetHandler %NAME%
** </Location>
**
** Then after restarting Apache via
**
** $ apachectl restart
**
** you immediately can request the URL /%NAME and watch for the
** output of this module. This can be achieved for instance via:
**
** $ lynx -mime_header http://localhost/%NAME%
**
** The output should be similar to the following one:
**
** HTTP/1.1 200 OK
** Date: Tue, 31 Mar 1998 14:42:22 GMT
** Server: Apache/1.3b6-dev
** Connection: close
** Content-Type: text/html
**
** The sample page from mod_%NAME%.c
**
*/

```

```

#include "httpd.h"
#include "http_config.h"
#include "conf.h"

```

```

/* The sample content handler */
static int %NAME%_handler(request_rec *r)
{
    r->content_type = "text/html";
    ap_send_http_header(r);
    if (!r->header_only)
        ap_rputs("The sample page from mod_%NAME%.c\n", r);
    return OK;
}

```

```

/* Dispatch list of content handlers */
static const handler_rec %NAME%_handlers[] = {
    { "%NAME%", %NAME%_handler },
    { NULL, NULL }
};

```

```

/* Dispatch list for API hooks */
module MODULE_VAR_EXPORT %NAME%_module = {
    STANDARD_MODULE_STUFF,
    NULL, /* module initializer */
    NULL, /* create per-dir config structures */
    NULL, /* merge per-dir config structures */
}

```

```

NULL,          /* create per-server config structures */
NULL,          /* merge per-server config structures */
NULL,          /* table of config file commands */
%NAME%_handlers, /* [#8] MIME-typed-dispatched handlers */
NULL,          /* [#1] URI to filename translation */
NULL,          /* [#4] validate user id from request */
NULL,          /* [#5] check if the user is ok_here */
NULL,          /* [#2] check access by host address */
NULL,          /* [#6] determine MIME type */
NULL,          /* [#7] pre-run fixups */
NULL,          /* [#9] log a transaction */
NULL,          /* [#3] header parser */
NULL,          /* child_init */
NULL,          /* child_exit */
NULL           /* [#0] post read-request */
};

```

```

~~~TEMPLATE: \apache\combo

```

```

~~~TEMPLATE: \apache\access.conf

```

```

~~~access.conf

```

```

# access.conf: Global access configuration

```

```

# Online docs at http://www.apache.org/

```

```

# This file defines server settings which affect which types of services
# are allowed, and in what circumstances.

```

```

# Each directory to which Apache has access, can be configured with respect
# to which services and features are allowed and/or disabled in that
# directory (and its subdirectories).

```

```

# Originally by Rob McCool

```

```

# First, we configure the "default" to be a very restrictive set of
# permissions.

```

```

<Directory />
Options FollowSymLinks
AllowOverride None
</Directory>

```

```

# Note that from this point forward you must specifically allow
# particular features to be enabled - so if something's not working as
# you might expect, make sure that you have specifically enabled it
# below.

```

```

# This should be changed to whatever you set DocumentRoot to.

```

```

#<Directory "O_R_A_C_L_E_A_P_B_A_S_E/htdocs">
<Directory "O_R_A_C_L_E_V_G_N_B_A_S_E/cas-docs">

```

```

# This may also be "None", "All", or any combination of "Indexes",
# "Includes", "FollowSymLinks", "ExecCGI", or "MultiViews".

```

```

# Note that "MultiViews" must be named *explicitly* --- "Options All"
# doesn't give it to you.

```

```

#Options Indexes FollowSymLinks

```

```

# ***** VIGNETTE ADDITIONS *****

```



```
Options Indexes FollowSymLinks Includes
# ***** VIGNETTE ADDITIONS *****

# This controls which options the .htaccess files in directories can
# override. Can also be "All", or any combination of "Options", "FileInfo",
# "AuthConfig", and "Limit"

AllowOverride None

# Controls who can get stuff from this server.

order allow,deny
allow from all

</Directory>

# O_R_A_C_L_E_A_P_B_A_S_E/cgi-bin should be changed to whatever your ScriptAliased
# CGI directory exists, if you have that configured.

<Directory "O_R_A_C_L_E_A_P_B_A_S_E/cgi-bin">
AllowOverride None
Options None
</Directory>

# Allow server status reports, with the URL of http://servername/server-status
# Change the ".your_domain.com" to match your domain to enable.

#<Location /server-status>
#SetHandler server-status

#order deny,allow
#deny from all
#allow from .your_domain.com
#</Location>

# Allow remote server configuration reports, with the URL of
# http://servername/server-info (requires that mod_info.c be loaded).
# Change the ".your_domain.com" to match your domain to enable.

#<Location /server-info>
#SetHandler server-info

#order deny,allow
#deny from all
#allow from .your_domain.com
#</Location>

# There have been reports of people trying to abuse an old bug from pre-1.1
# days. This bug involved a CGI script distributed as a part of Apache.
# By uncommenting these lines you can redirect these attacks to a logging
# script on phf.apache.org. Or, you can record them yourself, using the script
# support/phf_abuse_log.cgi.

#<Location /cgi-bin/phf*>
#deny from all
#ErrorDocument 403 http://phf.apache.org/phf_abuse_log.cgi
#</Location>

# You may place any other directories or locations you wish to have
```

```

# access information for after this one.

# ***** VIGNETTE ADDITIONS *****
<Location /ServerSideFunction/>
SetHandler ServerSideFunction
allow from all
</Location>
# ***** VIGNETTE ADDITIONS *****
~~~TEMPLATE: \apache\apachectl
~~~apachectl
#!/bin/sh
#
# Apache control script designed to allow an easy command line interface
# to controlling Apache.  Written by Marc Slemko, 1997/08/23
#
# The exit codes returned are:
#   0 - operation completed successfully
#   1 -
#   2 - usage error
#   3 - httpd could not be started
#   4 - httpd could not be stopped
#   5 - httpd could not be started during a restart
#   6 - httpd could not be restarted during a restart
#   7 - httpd could not be restarted during a graceful restart
#   8 - configuration syntax error
#
# When multiple arguments are given, only the error from the _last_
# one is reported.  Run "apachectl help" for usage info
#
# ||||| START CONFIGURATION SECTION |||||
# -----
#
# the path to your PID file
PIDFILE=O_R_A_C_L_E_A_P_B_A_S_E/var/run/httpd.pid
PIDFILE=O_R_A_C_L_E_A_P_B_A_S_E/logs/httpd.pid
#
# the path to your httpd binary, including options if necessary
HTTPD=O_R_A_C_L_E_A_P_B_A_S_E/sbin/httpd
#
# a command that outputs a formatted text version of the HTML at the
# url given on the command line.  Designed for lynx, however other
# programs may work.
LYNX="lynx -dump"
#
# the URL to your server's mod_status status page.  If you do not
# have one, then status and fullstatus will not work.
STATUSURL="http://localhost/server-status"
#
# -----
# ||||| END CONFIGURATION SECTION |||||

ERROR=0
ARGV="$@"
if [ "x$ARGV" = "x" ] ; then
    ARGS="help"
fi

for ARG in $@ $ARGS

```

```

do
# check for pidfile
if [ -f $PIDFILE ] ; then
    PID=`cat $PIDFILE`
    if kill -0 $PID; then
        STATUS="httpd (pid $PID) running"
        RUNNING=1
    else
        STATUS="httpd (pid $PID?) not running"
        RUNNING=0
    fi
else
    STATUS="httpd (no pid file) not running"
    RUNNING=0
fi

case $ARG in
start)
    if [ $RUNNING -eq 1 ]; then
        echo "$0 $ARG: httpd (pid $PID) already running"
        continue
    fi
    if $HTTPD ; then
        echo "$0 $ARG: httpd started"
    else
        echo "$0 $ARG: httpd could not be started"
        ERROR=3
    fi
    ;;
stop)
    if [ $RUNNING -eq 0 ]; then
        echo "$0 $ARG: $STATUS"
        continue
    fi
    if kill $PID ; then
        echo "$0 $ARG: httpd stopped"
    else
        echo "$0 $ARG: httpd could not be stopped"
        ERROR=4
    fi
    ;;
restart)
    if [ $RUNNING -eq 0 ]; then
        echo "$0 $ARG: httpd not running, trying to start"
        if $HTTPD ; then
            echo "$0 $ARG: httpd started"
        else
            echo "$0 $ARG: httpd could not be started"
            ERROR=5
        fi
    else
        if $HTTPD -t >/dev/null 2>&1; then
            if kill -HUP $PID ; then
                echo "$0 $ARG: httpd restarted"
            else
                echo "$0 $ARG: httpd could not be restarted"
                ERROR=6
            fi
        else

```

```

        echo "$0 $ARG: configuration broken, ignoring restart"
        echo "$0 $ARG: (run 'apachectl configtest' for details)"
        ERROR=6
    fi
fi
;;
graceful)
    if [ $RUNNING -eq 0 ]; then
        echo "$0 $ARG: httpd not running, trying to start"
        if $HTTPD ; then
            echo "$0 $ARG: httpd started"
        else
            echo "$0 $ARG: httpd could not be started"
            ERROR=5
        fi
    else
        if $HTTPD -t >/dev/null 2>&1; then
            if kill -USR1 $PID ; then
                echo "$0 $ARG: httpd gracefully restarted"
            else
                echo "$0 $ARG: httpd could not be restarted"
                ERROR=7
            fi
        else
            echo "$0 $ARG: configuration broken, ignoring restart"
            echo "$0 $ARG: (run 'apachectl configtest' for details)"
            ERROR=7
        fi
    fi
fi
;;
status)
    $LYNX $STATUSURL | awk ' /process$/ { print; exit } { print } '
    ;;
fullstatus)
    $LYNX $STATUSURL
    ;;
configtest)
    if $HTTPD -t; then
        :
    else
        ERROR=8
    fi
fi
;;
*)
    echo "usage: $0 {start|stop|restart|fullstatus|status|graceful|configtest|help}"
    cat <<EOF

```

```

start      - start httpd
stop       - stop httpd
restart    - restart httpd if running by sending a SIGHUP or start if
             not running
fullstatus - dump a full status screen; requires lynx and mod_status enabled
status     - dump a short status screen; requires lynx and mod_status enabled
graceful   - do a graceful restart by sending a SIGUSR1 or start if not running
configtest - do a configuration syntax test
help       - this screen

```

EOF

ERROR=2

```

;;

esac

done

exit $ERROR

# =====
# Copyright (c) 1995-1998 The Apache Group. All rights reserved.
#
# Redistribution and use in source and binary forms, with or without
# modification, are permitted provided that the following conditions
# are met:
#
# 1. Redistributions of source code must retain the above copyright
# notice, this list of conditions and the following disclaimer.
#
# 2. Redistributions in binary form must reproduce the above copyright
# notice, this list of conditions and the following disclaimer in
# the documentation and/or other materials provided with the
# distribution.
#
# 3. All advertising materials mentioning features or use of this
# software must display the following acknowledgment:
# "This product includes software developed by the Apache Group
# for use in the Apache HTTP server project (http://www.apache.org/)."
#
# 4. The names "Apache Server" and "Apache Group" must not be used to
# endorse or promote products derived from this software without
# prior written permission. For written permission, please contact
# apache@apache.org.
#
# 5. Products derived from this software may not be called "Apache"
# nor may "Apache" appear in their names without prior written
# permission of the Apache Group.
#
# 6. Redistributions of any form whatsoever must retain the following
# acknowledgment:
# "This product includes software developed by the Apache Group
# for use in the Apache HTTP server project (http://www.apache.org/)."
#
# THIS SOFTWARE IS PROVIDED BY THE APACHE GROUP ``AS IS'' AND ANY
# EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
# IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
# PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE APACHE GROUP OR
# ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
# SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
# NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
# LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
# HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,
# STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
# ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED
# OF THE POSSIBILITY OF SUCH DAMAGE.
# =====
#
# This software consists of voluntary contributions made by many
# individuals on behalf of the Apache Group and was originally based
# on public domain software written at the National Center for

```

```

# Supercomputing Applications, University of Illinois, Urbana-Champaign.
# For more information on the Apache Group and the Apache HTTP server
# project, please see <http://www.apache.org/>.
#
~~~TEMPLATE: \apache\apxs
~~~apxs
#!no-perl-on-this-system
## =====
## Copyright (c) 1998 The Apache Group. All rights reserved.
##
## Redistribution and use in source and binary forms, with or without
## modification, are permitted provided that the following conditions
## are met:
##
## 1. Redistributions of source code must retain the above copyright
## notice, this list of conditions and the following disclaimer.
##
## 2. Redistributions in binary form must reproduce the above copyright
## notice, this list of conditions and the following disclaimer in
## the documentation and/or other materials provided with the
## distribution.
##
## 3. All advertising materials mentioning features or use of this
## software must display the following acknowledgment:
## "This product includes software developed by the Apache Group
## for use in the Apache HTTP server project (http://www.apache.org/)."
##
## 4. The names "Apache Server" and "Apache Group" must not be used to
## endorse or promote products derived from this software without
## prior written permission. For written permission, please contact
## apache@apache.org.
##
## 5. Products derived from this software may not be called "Apache"
## nor may "Apache" appear in their names without prior written
## permission of the Apache Group.
##
## 6. Redistributions of any form whatsoever must retain the following
## acknowledgment:
## "This product includes software developed by the Apache Group
## for use in the Apache HTTP server project (http://www.apache.org/)."
##
## THIS SOFTWARE IS PROVIDED BY THE APACHE GROUP ``AS IS'' AND ANY
## EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
## IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
## PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE APACHE GROUP OR
## ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
## SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
## NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
## LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
## HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,
## STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
## ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED
## OF THE POSSIBILITY OF SUCH DAMAGE.
## =====
##
## This software consists of voluntary contributions made by many
## individuals on behalf of the Apache Group and was originally based
## on public domain software written at the National Center for
## Supercomputing Applications, University of Illinois, Urbana-Champaign.

```

```

## For more information on the Apache Group and the Apache HTTP server
## project, please see <http://www.apache.org/>.
##

##
## apxs -- APache eXtenSion tool
## Written by Ralf S. Engelschall <rse@apache.org>
##

require 5.003;
use strict;
package apxs;

##
## Configuration
##

my $CFG_CC          = 'gcc';          # substituted via Makefile.tmpl
my $CFG_CFLAGS      = ' -DSOLARIS2=260 `../apaci`';      # substituted via
Makefile.tmpl
my $CFG_CFLAGS_SHLIB = ''; # substituted via Makefile.tmpl
my $CFG_LD_SHLIB     = ''; # substituted via Makefile.tmpl
my $CFG_LDFLAGS_SHLIB = ''; # substituted via Makefile.tmpl
my $CFG_LIBS_SHLIB   = ''; # substituted via Makefile.tmpl
my $CFG_PREFIX       = 'O_R_A_C_L_E_A_P_B_A_S_E';      # substituted via APACI install
my $CFG_SBINDIR      = 'O_R_A_C_L_E_A_P_B_A_S_E/sbin';   # substituted via APACI
install
my $CFG_INCLUDEDIR   = 'O_R_A_C_L_E_A_P_B_A_S_E/include'; # substituted via APACI
install
my $CFG_LIBEXECDIR   = 'O_R_A_C_L_E_A_P_B_A_S_E/libexec'; # substituted via APACI
install
my $CFG_SYSCONFDIR   = 'O_R_A_C_L_E_A_P_B_A_S_E/etc';    # substituted via APACI install

##
## Cleanup the above stuff
##
$CFG_CFLAGS =~ s|^\\s+||;
$CFG_CFLAGS =~ s|\\s+$||;
$CFG_CFLAGS =~ s|\\s+\\.+apaci`||;

##
## Initial shared object support check
##
if (not grep(/mod_so/, ` $CFG_SBINDIR/httpd -l`)) {
    print STDERR "apxs:Error: Sorry, no shared object support for Apache\\n";
    print STDERR "apxs:Error: available under your platform. Make sure\\n";
    print STDERR "apxs:Error: the Apache module mod_so is compiled into\\n";
    print STDERR "apxs:Error: your server binary ` $CFG_SBINDIR/httpd'.\\n";
    exit(1);
}

##
## parse argument line
##

# defaults for parameters
my $opt_n = '';
my $opt_g = '';
my $opt_c = 0;

```

```

my $opt_o = '';
my @opt_D = ();
my @opt_I = ();
my @opt_L = ();
my @opt_l = ();
my $opt_i = 0;
my $opt_a = 0;
my $opt_A = 0;
my $opt_q = 0;

# this subroutine is derived from Perl's getopt.pl with the enhancement of
# the "+" metacharater at the format string to allow a list to be build by
# subsequent occurance of the same option.
sub Getopts {
    my ($argumentative, @ARGV) = @_ ;
    my (@args, $first, $rest, $pos);
    my ($errs) = 0;
    local ($_);
    local ($i) = 0;

    @args = split( / */, $argumentative);
    while(@ARGV && ($_ = $ARGV[0]) =~ /^-(.)(.*)/) {
        ($first, $rest) = ($1,$2);
        if ($_ =~ m|^--$|) {
            shift(@ARGV);
            last;
        }
        $pos = index($argumentative,$first);
        if($pos >= $i) {
            if($args[$pos+1] eq ':') {
                shift(@ARGV);
                if($rest eq '') {
                    unless (@ARGV) {
                        print STDERR "apxs:Error: Incomplete option: $first (needs an
argument)\n";
                        ++$errs;
                    }
                    $rest = shift(@ARGV);
                }
                eval "\$opt_$first = \"$rest\";";
            }
            elsif ($args[$pos+1] eq '+') {
                shift(@ARGV);
                if($rest eq '') {
                    unless (@ARGV) {
                        print STDERR "apxs:Error: Incomplete option: $first (needs an
argument)\n";
                        ++$errs;
                    }
                    $rest = shift(@ARGV);
                }
                eval "push(@opt_$first, \"$rest\");";
            }
            else {
                eval "\$opt_$first = 1";
                if($rest eq '') {
                    shift(@ARGV);
                }
                else {

```



```

        $ARGV[0] = "-$rest";
    }
}
else {
    print STDERR "apxs:Error: Unknown option: $first\n";
    ++$errs;
    if($rest ne '') {
        $ARGV[0] = "-$rest";
    }
    else {
        shift(@ARGV);
    }
}
}
return ($errs == 0, @ARGV);
}

sub usage {
    print STDERR "Usage: apxs -g -n <modname>\n";
    print STDERR "      apxs -q <query> ...\n";
    print STDERR "      apxs -c [-o <dsofile>] [-D <name>[=<value>]] [-I <incdir>]\n";
    print STDERR "      [-L <libdir>] [-l <libname>] <files> ...\n";
    print STDERR "      apxs -i [-a] [-n <modname>] <dsofile> ...\n";
    exit(1);
}

# option handling
my $rc;
($rc, @ARGV) = &Getopts("qn:gco:I+D+L+l+iaA", @ARGV);
&usage if ($rc == 0);
&usage if ($#ARGV == -1 and not $opt_g);
&usage if (not $opt_q and not ($opt_g and $opt_n) and not $opt_i and not $opt_c);

# argument handling
my @args = @ARGV;
my $name = 'unknown';
$name = $opt_n if ($opt_n ne '');

##
## Operation
##

# helper function for executing a list of
# system command with return code checks
sub execute_cmds {
    my (@cmds) = @_;
    my ($cmd, $rc);

    foreach $cmd (@cmds) {
        print STDERR "$cmd\n";
        $rc = system("$cmd");
        if ($rc != 0) {
            printf(STDERR "apxs:Break: Command failed with rc=%d\n", $rc << 8);
            exit(1);
        }
    }
}

```

```

if ($opt_g) {
    ##
    ## SAMPLE MODULE SOURCE GENERATION
    ##

    if (-d $name) {
        print STDERR "apxs:Error: Directory '$name' already exists. Remove first\n";
        exit(1);
    }

    my $data = join(' ', <DATA>);
    $data =~ s|NAME|$name|sg;

    my ($mkf, $src) = ($data =~ m|^(.+)-#=-\n(.+)|s);

    print STDERR "Creating [DIR] $name\n";
    system("mkdir $name");
    print STDERR "Creating [FILE] $name/Makefile\n";
    open(FP, ">${name}/Makefile") || die;
    print FP $mkf;
    close(FP);
    print STDERR "Creating [FILE] $name/mod_$name.c\n";
    open(FP, ">${name}/mod_${name}.c") || die;
    print FP $src;
    close(FP);

    exit(0);
}

if ($opt_q) {
    ##
    ## QUERY INFORMATION
    ##

    my $result = '';
    my $arg;
    foreach $arg (@args) {
        my $ok = 0;
        my $name;
        foreach $name (qw(
            CC LD_SHLIB CFLAGS CFLAGS_SHLIB LDFLAGS_SHLIB
            PREFIX SBINDIR INCLUDEDIR LIBEXECDIR SYSCONFDIR
        )) {
            if ($arg eq $name or $arg eq lc($name)) {
                my $val = eval "\$CFG_$name";
                $result .= "${val}::";
                $ok = 1;
            }
        }
        if (not $ok) {
            printf(STDERR "apxs:Error: Invalid query string '%s'\n", $arg);
            exit(1);
        }
    }
    $result =~ s|::||;
    $result =~ s|::||;
    print $result;
}

```

```

if ($opt_c) {
    ##
    ##  SHARED OBJECT COMPILATION
    ##

    #  split files into sources and objects
    my @srcs = ();
    my @objs = ();
    my $f;
    foreach $f (@args) {
        if ($f =~ m|\.c$|) {
            push(@srcs, $f);
        }
        else {
            push(@objs, $f);
        }
    }

    #  determine output file
    my $dso_file;
    if ($opt_o eq '') {
        if ($#srcs > -1) {
            $dso_file = $srcs[0];
            $dso_file =~ s|\.|^|+.so|;
        }
        elsif ($#objs > -1) {
            $dso_file = $objs[0];
            $dso_file =~ s|\.|^|+.so|;
        }
        else {
            $dso_file = "mod_unknown.so";
        }
    }
    else {
        $dso_file = $opt_o;
    }

    #  create compilation commands
    my @cmds = ();
    my $opt = '';
    my ($opt_I, $opt_D);
    foreach $opt_I (@opt_I) {
        $opt .= "-I$opt_I ";
    }
    foreach $opt_D (@opt_D) {
        $opt .= "-D$opt_D ";
    }
    my $cflags = "$CFG_CFLAGS $CFG_CFLAGS_SHLIB";
    my $s;
    foreach $s (@srcs) {
        my $o = $s;
        $o =~ s|\.c$|.o|;
        push(@cmds, "$CFG_CC $cflags -I$CFG_INCLUDEDIR $opt -c $s");
        unshift(@objs, $o);
    }

    #  create link command
    my $cmd = "$CFG_LD_SHLIB $CFG_LDFLAGS_SHLIB -o $dso_file";
    my $o;

```

```

foreach $o (@objs) {
    $cmd .= " $o";
}
$opt = '';
my ($opt_L, $opt_1);
foreach $opt_L (@opt_L) {
    $opt .= " -L$opt_L";
}
foreach $opt_1 (@opt_1) {
    $opt .= " -l$opt_1";
}
$cmd .= $opt;
$cmd .= " $CFG_LIBS_SHLIB";
push(@cmds, $cmd);

# execute the commands
&execute_cmds(@cmds);

# allow one-step compilation and installation
if ($opt_i) {
    @args = ( $dso_file );
}
}

if ($opt_i) {
    ##
    ## SHARED OBJECT INSTALLATION
    ##

    # determine installation commands
    # and corresponding LoadModule/AddModule directives
    my @lmd = ();
    my @amd = ();
    my @cmds = ();
    my $f;
    foreach $f (@args) {
        if ($f !~ m|\.so$|) {
            print STDERR "apxs:Error: file $f is not a shared object\n";
            exit(1);
        }
        my $t = $f;
        $t =~ s|^\.+/(^/|+)$|$1|;
        push(@cmds, "cp $f $CFG_LIBEXECDIR/$t");
        push(@cmds, "chmod 755 $CFG_LIBEXECDIR/$t");

        # determine module symbolname and filename
        my $filename = '';
        if ($name eq 'unknown') {
            $name = '';
            my $base = $f;
            $base =~ s|\.|^|+|$|;
            if (-f "$base.c") {
                open(FP, "<$base.c");
                my $content = join(' ', <FP>);
                close(FP);
                if ($content =~
m|.*module\s+(?:MODULE_VAR_EXPORT\s+)?([a-zA-Z0-9_]+)_module\s*=\s*.*|s) {
                    $name = "$1";
                    $filename = "$base.c";

```

```

        $filename =~ s|^[/]+/||;
    }
}
if ($name eq '') {
    if ($base =~ m|.*mod_([a-zA-Z0-9_+]\.+)|) {
        $name = "$1";
        $filename = $base;
        $filename =~ s|^[/]+/||;
    }
}
if ($name eq '') {
    print "apxs:Error: Sorry, cannot determine bootstrap symbol name\n";
    print "apxs:Error: Please specify one with option `-n'\n";
    exit(1);
}
}
if ($filename eq '') {
    $filename = "mod_${name}.c";
}
my $dir = $CFG_LIBEXECDIR;
$dir =~ s|^$CFG_PREFIX/?||;
$dir =~ s|(|)$|1/|;
push(@lmd, sprintf("LoadModule %-18s %s", "${name}_module", "$dir$t"));
push(@amd, sprintf("AddModule %s", $filename));
}

# execute the commands
&execute_cmds(@cmds);

# activate module via LoadModule/AddModule directive
if ($opt_a or $opt_A) {
    if (not -f "$CFG_SYSCONFDIR/httpd.conf") {
        print "apxs:Error: Config file $CFG_SYSCONFDIR/httpd.conf not found\n";
        exit(1);
    }

    open(FP, "<$CFG_SYSCONFDIR/httpd.conf") || die;
    my $content = join('', <FP>);
    close(FP);

    if ($content !~ m|\n#\s*LoadModule\s+|) {
        print STDERR "apxs:Error: Activation failed for custom
$CFG_SYSCONFDIR/httpd.conf file.\n";
        print STDERR "apxs:Error: At least one `LoadModule' directive already has to
exist.\n";
        exit(1);
    }
}

my $update = 0;
my $lmd;
foreach $lmd (@lmd) {
    if ($content !~ m|\n#\s*$lmd|) {
        my $c = '';
        $c = '#' if ($opt_A);
        $content =~ s|^(\.*\n#\s*LoadModule\s+[^\\n]+\\n)|$1$c$lmd\\n|sg;
        $update = 1;
        $lmd =~ m|LoadModule\s+(.+)__module.*|;
        my $what = $opt_A ? "preparing" : "activating";
        print STDERR "[ $what module ` $1 ' in $CFG_SYSCONFDIR/httpd.conf ]\n";
    }
}

```

```

    }
}
my $amd;
foreach $amd (@amd) {
    if ($content !~ m|\n#\s*$amd|) {
        my $c = '';
        $c = '#' if ($opt_A);
        $content =~ s|^(\.*\n#\s*AddModule\s+[\n]+\n)|$1$c$amd\n|sg;
        $update = 1;
    }
}
if ($update) {
    open(FP, ">$CFG_SYSCONFDIR/httpd.conf.new") || die;
    print FP $content;
    close(FP);
    system("cp $CFG_SYSCONFDIR/httpd.conf $CFG_SYSCONFDIR/httpd.conf.bak && " .
        "cp $CFG_SYSCONFDIR/httpd.conf.new $CFG_SYSCONFDIR/httpd.conf && " .
        "rm $CFG_SYSCONFDIR/httpd.conf.new");
}
}
}

##EOF##
__DATA__
##
## Makefile -- Apache for sample %NAME% module
## Autogenerated via ``apxs -n %NAME% -g'`.
##

# the used tools
APXS=apxs
APACHECTL=apachectl

# additional defines, includes and libraries
#DEF=-Dmy_define=my_value
#INC=-Imy/include/dir
#LIB=-Lmy/lib/dir -lmylib

# the default target
all: mod_%NAME%.so

# compile the shared object file
mod_%NAME%.so: mod_%NAME%.c
    $(APXS) -c $(DEF) $(INC) $(LIB) mod_%NAME%.c

# install the shared object file into Apache
install: all
    $(APXS) -i -a -n '%NAME%' mod_%NAME%.so

# cleanup
clean:
    -rm -f mod_%NAME%.o mod_%NAME%.so

# simple test
test: reload
    lynx -mime_header http://localhost/%NAME%

# install and activate shared object by reloading Apache to
# force a reload of the shared object file

```

```

reload: install restart

# the general Apache start/restart/stop
# procedures
start:
    $(APACHECTL) start
restart:
    $(APACHECTL) restart
stop:
    $(APACHECTL) stop

-#=-
/*
** mod_%NAME%.c -- Apache sample %NAME% module
** [Autogenerated via ``apxs -n %NAME% -g'']
**
** To play with this sample module first compile it into a
** DSO file and install it into Apache's libexec directory
** by running:
**
**     $ apxs -c -i mod_%NAME%.c
**
** Then activate it in Apache's httpd.conf file for instance
** for the URL /%NAME% in as follows:
**
**     # httpd.conf
**     LoadModule %NAME%_module libexec/mod_%NAME%.so
**     <Location /%NAME%>
**     SetHandler %NAME%
**     </Location>
**
** Then after restarting Apache via
**
**     $ apachectl restart
**
** you immediately can request the URL /%NAME% and watch for the
** output of this module. This can be achieved for instance via:
**
**     $ lynx -mime_header http://localhost/%NAME%
**
** The output should be similar to the following one:
**
**     HTTP/1.1 200 OK
**     Date: Tue, 31 Mar 1998 14:42:22 GMT
**     Server: Apache/1.3b6-dev
**     Connection: close
**     Content-Type: text/html
**
**     The sample page from mod_%NAME%.c
**
*/

#include "httpd.h"
#include "http_config.h"
#include "conf.h"

/* The sample content handler */
static int %NAME%_handler(request_rec *r)
{
    r->content_type = "text/html";

```

```

    ap_send_http_header(r);
    if (!r->header_only)
        ap_rputs("The sample page from mod_%NAME%.c\n", r);
    return OK;
}

/* Dispatch list of content handlers */
static const handler_rec %NAME%_handlers[] = {
    { "%NAME%", %NAME%_handler },
    { NULL, NULL }
};

/* Dispatch list for API hooks */
module MODULE_VAR_EXPORT %NAME%_module = {
    STANDARD_MODULE_STUFF,
    NULL, /* module initializer */
    NULL, /* create per-dir config structures */
    NULL, /* merge per-dir config structures */
    NULL, /* create per-server config structures */
    NULL, /* merge per-server config structures */
    NULL, /* table of config file commands */
    %NAME%_handlers, /* [#8] MIME-typed-dispatched handlers */
    NULL, /* [#1] URI to filename translation */
    NULL, /* [#4] validate user id from request */
    NULL, /* [#5] check if the user is ok here */
    NULL, /* [#2] check access by host address */
    NULL, /* [#6] determine MIME type */
    NULL, /* [#7] pre-run fixups */
    NULL, /* [#9] log a transaction */
    NULL, /* [#3] header parser */
    NULL, /* child_init */
    NULL, /* child_exit */
    NULL, /* [#0] post read-request */
};

~~~TEMPLATE: \apache\httpd.conf
~~~httpd.conf
# This is the main server configuration file. See URL http://www.apache.org/
# for instructions.

# Do NOT simply read the instructions in here without understanding
# what they do, if you are unsure consult the online docs. You have been
# warned.

# Originally by Rob McCool

# Dynamic Shared Object (DSO) Support
#
# To be able to use the functionality of a module which was built as a DSO you
# have to place corresponding 'LoadModule' lines at this location so the
# directives contained in it are actually available _before_ they are used.
# Please read the file README.DSO in the Apache 1.3 distribution for more
# details about the DSO mechanism and run 'httpd -l' for the list of already
# built-in (statically linked and thus always available) modules in your httpd
# binary.
#
# Example:
# LoadModule foo_module libexec/mod_foo.so

```



```

# ServerType is either inetd, or standalone.

ServerType standalone

# If you are running from inetd, go to "ServerAdmin".

# Port: The port the standalone listens to. For ports < 1023, you will
# need httpd to be run as root initially.

Port A_P_A_C_H_E_B_A_S_E01

# HostnameLookups: Log the names of clients or just their IP numbers
#   e.g.   www.apache.org (on) or 204.62.129.132 (off)
# The default is off because it'd be overall better for the net if people
# had to knowingly turn this feature on.

HostnameLookups off

# If you wish httpd to run as a different user or group, you must run
# httpd as root initially and it will switch.

# User/Group: The name (or #number) of the user/group to run httpd as.
#   On SCO (ODT 3) use User nouser and Group nogroup
#   On HP/UX you may not be able to use shared memory as nobody, and the
#   suggested workaround is to create a user www and use that user.
#   NOTE that some kernels refuse to setgid(Group) or semctl(IPC_SET)
#   when the value of (unsigned)Group is above 60000;
#   don't use Group #-1 on these systems!

User nobody
Group nobody

# ServerAdmin: Your address, where problems with the server should be
# e-mailed.

ServerAdmin root1@H_O_S_T_N_A_M_E.D_O_M_A_I_N

# ServerRoot: The directory the server's config, error, and log files
# are kept in.
# NOTE! If you intend to place this on a NFS (or otherwise network)
# mounted filesystem then please read the LockFile documentation,
# you will save yourself a lot of trouble.

ServerRoot "O_R_A_C_L_E_A_P_B_A_S_E"

# BindAddress: You can support virtual hosts with this option. This option
# is used to tell the server which IP address to listen to. It can either
# contain "*", an IP address, or a fully qualified Internet domain name.
# See also the VirtualHost directive.

#BindAddress *

# ErrorLog: The location of the error log file. If this does not start
# with /, ServerRoot is prepended to it.

ErrorLog logs/error_log

# LogLevel: Control the number of messages logged to the error_log.
# Possible values include: debug, info, notice, warn, error, crit,

```

```

# alert, emerg.

LogLevel warn

# The following directives define some format nicknames for use with
# a CustomLog directive (see below).

LogFormat "%h %l %u %t \"%r\" %>s %b \"%{Referer}i\" \"%{User-Agent}i\"" combined
LogFormat "%h %l %u %t \"%r\" %>s %b" common
LogFormat "%{Referer}i -> %U" referer
LogFormat "%{User-agent}i" agent

# The location of the access logfile (Common Logfile Format).
# If this does not start with /, ServerRoot is prepended to it.

CustomLog logs/access_log common

# If you would like to have an agent and referer logfile uncomment the
# following directives.

#CustomLog logs/referer_log referer
#CustomLog logs/agent_log agent

# If you prefer a single logfile with access, agent and referer information
# (Combined Logfile Format) you can use the following directive.

#CustomLog logs/access_log combined

# PidFile: The file the server should log its pid to
PidFile logs/httpd.pid

# ScoreBoardFile: File used to store internal server process information.
# Not all architectures require this. But if yours does (you'll know because
# this file is created when you run Apache) then you *must* ensure that
# no two invocations of Apache share the same scoreboard file.
ScoreBoardFile logs/apache_runtime_status

# The LockFile directive sets the path to the lockfile used when Apache
# is compiled with either USE_FCNTL_SERIALIZED_ACCEPT or
# USE_FLOCK_SERIALIZED_ACCEPT. This directive should normally be left at
# its default value. The main reason for changing it is if the logs
# directory is NFS mounted, since the lockfile MUST BE STORED ON A LOCAL
# DISK. The PID of the main server process is automatically appended to
# the filename.
#
#LockFile logs/accept.lock

# ExtendedStatus controls whether Apache will generate "full" status
# information (ExtendedStatus On) or just basic information (ExtendedStatus
# Off) when the server-status Handler is called. The default is Off.
#
#ExtendedStatus On

# ServerName allows you to set a host name which is sent back to clients for
# your server if it's different than the one the program would get (i.e. use
# "www" instead of the host's real name).
#
# Note: You cannot just invent host names and hope they work. The name you
# define here must be a valid DNS name for your host. If you don't understand

```

this, ask your network administrator.
If your host doesn't have a registered DNS name, enter its IP address here.
You will have to access it by its address (e.g., http://123.45.67.89)
anyway, and this will make redirections work in a sensible way.

#ServerName new.host.name

Optionally add a line containing the server version and virtual host
name to server-generated pages (error documents, ftp directory listings,
mod_status and mod_info output etc., but not SSI generated documents).
Set to "EMail" to also include a mailto: link to the ServerAdmin.
Set to one of: On | Off | EMail
ServerSignature on

UseCanonicalName: (new for 1.3) With this setting turned on, whenever
Apache needs to construct a self-referencing URL (a url that refers back
to the server the response is coming from) it will use ServerName and
Port to form a "canonical" name. With this setting off, Apache will
use the hostname:port that the client supplied, when possible. This
also affects SERVER_NAME and SERVER_PORT in CGIs.
UseCanonicalName on

CacheNegotiatedDocs: By default, Apache sends Pragma: no-cache with each
document that was negotiated on the basis of content. This asks proxy
servers not to cache the document. Uncommenting the following line disables
this behavior, and proxies will be allowed to cache the documents.

#CacheNegotiatedDocs

Timeout: The number of seconds before receives and sends time out

Timeout 300

KeepAlive: Whether or not to allow persistent connections (more than
one request per connection). Set to "Off" to deactivate.

KeepAlive On

MaxKeepAliveRequests: The maximum number of requests to allow
during a persistent connection. Set to 0 to allow an unlimited amount.
We recommend you leave this number high, for maximum performance.

MaxKeepAliveRequests 100

KeepAliveTimeout: Number of seconds to wait for the next request

KeepAliveTimeout 15

Server-pool size regulation. Rather than making you guess how many
server processes you need, Apache dynamically adapts to the load it
sees --- that is, it tries to maintain enough server processes to
handle the current load, plus a few spare servers to handle transient
load spikes (e.g., multiple simultaneous requests from a single
Netscape browser).

It does this by periodically checking how many servers are waiting
for a request. If there are fewer than MinSpareServers, it creates
a new spare. If there are more than MaxSpareServers, some of the
spares die off. These values are probably OK for most sites ---

```

MinSpareServers 5
MaxSpareServers 10

# Number of servers to start --- should be a reasonable ballpark figure.

StartServers 5

# Limit on total number of servers running, i.e., limit on the number
# of clients who can simultaneously connect --- if this limit is ever
# reached, clients will be LOCKED OUT, so it should NOT BE SET TOO LOW.
# It is intended mainly as a brake to keep a runaway server from taking
# Unix with it as it spirals down...

MaxClients 150

# MaxRequestsPerChild: the number of requests each child process is
# allowed to process before the child dies.
# The child will exit so as to avoid problems after prolonged use when
# Apache (and maybe the libraries it uses) leak. On most systems, this
# isn't really needed, but a few (such as Solaris) do have notable leaks
# in the libraries.

MaxRequestsPerChild 30

# Proxy Server directives. Uncomment the following line to
# enable the proxy server:

#ProxyRequests On

# Enable/disable the handling of HTTP/1.1 "Via:" headers.
# ("Full" adds the server version; "Block" removes all outgoing Via: headers)
# Set to one of: Off | On | Full | Block
#ProxyVia on

# To enable the cache as well, edit and uncomment the following lines:
# (no cacheing without CacheRoot)

#CacheRoot @@ServerRoot@@/proxy

#CacheSize 5
#CacheGcInterval 4
#CacheMaxExpire 24
#CacheLastModifiedFactor 0.1
#CacheDefaultExpire 1
#NoCache a_domain.com another_domain.edu joes.garage_sale.com

# Listen: Allows you to bind Apache to specific IP addresses and/or
# ports, in addition to the default. See also the VirtualHost command

#Listen 3000
#Listen 12.34.56.78:80

# VirtualHost: Allows the daemon to respond to requests for more than one
# server address, if your server machine is configured to accept IP packets
# for multiple addresses. This can be accomplished with the ifconfig
# alias flag, or through kernel patches like VIF.

# Any httpd.conf or srm.conf directive may go into a VirtualHost command.
# See also the BindAddress entry.

```

```

#<VirtualHost host.some_domain.com>
#ServerAdmin webmaster@host.some_domain.com
#DocumentRoot /www/docs/host.some_domain.com
#ServerName host.some_domain.com
#ErrorLog logs/host.some_domain.com-error_log
#TransferLog logs/host.some_domain.com-access_log
#</VirtualHost>

# ***** VIGNETTE ADDITIONS *****
#

AddHandler server-parsed .html

# THESE ARE NON-OPTIONAL SETTINGS. You must provide values for these settings.
# The location of the StoryServer.cfg file for this content application server.
Vgn_SSConfigFile
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/S
toryServer.cfg
#
# The location of the shared library directory of your StoryServer installation
#
Vgn_ShLibDir O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
#
# ***** VIGNETTE ADDITIONS *****
~~~TEMPLATE: \apache\srm.conf
~~~srm.conf
# With this document, you define the name space that users see of your http
# server. This file also defines server settings which affect how requests are
# serviced, and how results should be formatted.

# See the tutorials at http://www.apache.org/ for
# more information.

# Originally by Rob McCool; Adapted for Apache

# DocumentRoot: The directory out of which you will serve your
# documents. By default, all requests are taken from this directory, but
# symbolic links and aliases may be used to point to other locations.

#DocumentRoot "O_R_A_C_L_E_V_G_N_B_A_S_E/htdocs"
DocumentRoot "O_R_A_C_L_E_V_G_N_B_A_S_E/cas-docs"

# UserDir: The name of the directory which is appended onto a user's home
# directory if a ~user request is recieved.

UserDir public_html

# DirectoryIndex: Name of the file or files to use as a pre-written HTML
# directory index. Separate multiple entries with spaces.

DirectoryIndex index.html

# FancyIndexing is whether you want fancy directory indexing or standard

FancyIndexing on

```

AddIcon tells the server which icon to show for different files or filename
extensions

AddIconByEncoding (CMP,/icons/compressed.gif) x-compress x-gzip

AddIconByType (TXT,/icons/text.gif) text/*
AddIconByType (IMG,/icons/image2.gif) image/*
AddIconByType (SND,/icons/sound2.gif) audio/*
AddIconByType (VID,/icons/movie.gif) video/*

AddIcon /icons/binary.gif .bin .exe
AddIcon /icons/binhex.gif .hqx
AddIcon /icons/tar.gif .tar
AddIcon /icons/world2.gif .wrl .wrl.gz .vrm .iv
AddIcon /icons/compressed.gif .Z .z .tgz .gz .zip
AddIcon /icons/a.gif .ps .ai .eps
AddIcon /icons/layout.gif .html .shtml .htm .pdf
AddIcon /icons/text.gif .txt
AddIcon /icons/c.gif .c
AddIcon /icons/p.gif .pl .py
AddIcon /icons/f.gif .for
AddIcon /icons/dvi.gif .dvi
AddIcon /icons/uuencoded.gif .uu
AddIcon /icons/script.gif .conf .sh .shar .csh .ksh .tcl
AddIcon /icons/tex.gif .tex
AddIcon /icons/bomb.gif core

AddIcon /icons/back.gif ..
AddIcon /icons/hand.right.gif README
AddIcon /icons/folder.gif ^^DIRECTORY^^
AddIcon /icons/blank.gif ^^BLANKICON^^

DefaultIcon is which icon to show for files which do not have an icon
explicitly set.

DefaultIcon /icons/unknown.gif

AddDescription allows you to place a short description after a file in
server-generated indexes.
Format: AddDescription "description" filename

ReadmeName is the name of the README file the server will look for by
default. Format: ReadmeName name

The server will first look for name.html, include it if found, and it will
then look for name and include it as plaintext if found.

HeaderName is the name of a file which should be prepended to
directory indexes.

ReadmeName README
HeaderName HEADER

IndexIgnore is a set of filenames which directory indexing should ignore
Format: IndexIgnore name1 name2...

IndexIgnore .??* *~ *# HEADER* README* RCS

AccessFileName: The name of the file to look for in each directory

for access control information.

AccessFileName .htaccess

The following lines prevent .htaccess files from being viewed by
Web clients. Since .htaccess files often contain authorization
information, access is disallowed for security reasons. Comment
these lines out if you want Web visitors to see the contents of
.htaccess files. If you change the AccessFileName directive above,
be sure to make the corresponding changes here.

```
<Files .htaccess>
order allow,deny
deny from all
</Files>
```

TypesConfig describes where the mime.types file (or equivalent) is
to be found.

TypesConfig conf/mime.types

DefaultType is the default MIME type for documents which the server
cannot find the type of from filename extensions.

DefaultType text/plain

AddEncoding allows you to have certain browsers (Mosaic/X 2.1+) uncompress
information on the fly. Note: Not all browsers support this.

```
AddEncoding x-compress Z
AddEncoding x-gzip gz
```

AddLanguage allows you to specify the language of a document. You can
then use content negotiation to give a browser a file in a language
it can understand. Note that the suffix does not have to be the same
as the language keyword --- those with documents in Polish (whose
net-standard language code is pl) may wish to use "AddLanguage pl .po"
to avoid the ambiguity with the common suffix for perl scripts.

```
AddLanguage en .en
AddLanguage fr .fr
AddLanguage de .de
AddLanguage da .da
AddLanguage el .el
AddLanguage it .it
```

LanguagePriority allows you to give precedence to some languages
in case of a tie during content negotiation.
Just list the languages in decreasing order of preference.

LanguagePriority en fr de

Redirect allows you to tell clients about documents which used to exist in
your server's namespace, but do not anymore. This allows you to tell the
clients where to look for the relocated document.
Format: Redirect fakename url

Aliases: Add here as many aliases as you need (with no limit). The format is

```

# Alias fakename realname

# Note that if you include a trailing / on fakename then the server will
# require it to be present in the URL.  So "/icons" isn't aliased in this
# example.

Alias /icons/ "O_R_A_C_L_E_A_P_B_A_S_E/icons/"

# ScriptAlias: This controls which directories contain server scripts.
# Format: ScriptAlias fakename realname

#ScriptAlias /cgi-bin/ "O_R_A_C_L_E_A_P_B_A_S_E/cgi-bin/"

# If you want to use server side includes, or CGI outside
# ScriptAliased directories, uncomment the following lines.

# AddType allows you to tweak mime.types without actually editing it, or to
# make certain files to be certain types.
# Format: AddType type/subtype ext1

# For example, the PHP3 module (not part of the Apache distribution)
# will typically use:
#AddType application/x-httpd-php3 .phtml
#AddType application/x-httpd-php3-source .phps

# AddHandler allows you to map certain file extensions to "handlers",
# actions unrelated to filetype. These can be either built into the server
# or added with the Action command (see below)
# Format: AddHandler action-name ext1

# To use CGI scripts:
#AddHandler cgi-script .cgi

# To use server-parsed HTML files
#AddType text/html .shtml
#AddHandler server-parsed .shtml

# Uncomment the following line to enable Apache's send-asis HTTP file
# feature
#AddHandler send-as-is asis

# If you wish to use server-parsed imagemap files, use
#AddHandler imap-file map

# To enable type maps, you might want to use
#AddHandler type-map var

# Action lets you define media types that will execute a script whenever
# a matching file is called. This eliminates the need for repeated URL
# pathnames for oft-used CGI file processors.
# Format: Action media/type /cgi-script/location
# Format: Action handler-name /cgi-script/location

# MetaDir: specifies the name of the directory in which Apache can find
# meta information files. These files contain additional HTTP headers
# to include when sending the document

#MetaDir .web

```



```
# MetaSuffix: specifies the file name suffix for the file containing the
# meta information.

#MetaSuffix .meta

# Customizable error response (Apache style)
# these come in three flavors
#
# 1) plain text
#ErrorDocument 500 "The server made a boo boo."
# n.b. the ("") marks it as text, it does not get output
#
# 2) local redirects
#ErrorDocument 404 /missing.html
# to redirect to local url /missing.html
#ErrorDocument 404 /cgi-bin/missing_handler.pl
# n.b. can redirect to a script or a document using server-side-includes.
#
# 3) external redirects
#ErrorDocument 402 http://some.other_server.com/subscription_info.html
#

# mod_mime_magic allows the server to use various hints from the file itself
# to determine its type.
#MimeMagicFile conf/magic

# The following directives disable keepalives and HTTP header flushes.
# The first directive disables it for Netscape 2.x and browsers which
# spoof it. There are known problems with these.
# The second directive is for Microsoft Internet Explorer 4.0b2
# which has a broken HTTP/1.1 implementation and does not properly
# support keepalive when it is used on 301 or 302 (redirect) responses.

BrowserMatch "Mozilla/2" nokeepalive
BrowserMatch "MSIE 4\.0b2;" nokeepalive downgrade-1.0 force-response-1.0

# The following directive disables HTTP/1.1 responses to browsers which
# are in violation of the HTTP/1.0 spec by not being able to grok a
# basic 1.1 response.

BrowserMatch "RealPlayer 4\.0" force-response-1.0
BrowserMatch "Java/1\.0" force-response-1.0
BrowserMatch "JDK/1\.0" force-response-1.0

# ***** VIGNETTE ADDITIONS *****
#
# Optional - set the alias to the StoryServer documentation root if this
# is the first development content application server
Alias /StoryServer O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/docroot
#
# ***** VIGNETTE ADDITIONS *****
~~~TEMPLATE: \apache\startApache
~~~startApache
#!/bin/ksh

O_R_A_C_L_E_A_P_B_A_S_E/sbin/httpd \
    -f O_R_A_C_L_E_A_P_B_A_S_E/conf/httpd.conf

exit
```

```

~~~TEMPLATE: \apache\stopApache
~~~stopApache
#!/bin/ksh

kill -TERM `cat O_R_A_C_L_E_A_P_B_A_S_E/logs/httpd.pid`

exit
~~~TEMPLATE: \apache\httpd.conf
~~~httpd.conf
# This is the main server configuration file. See URL http://www.apache.org/
# for instructions.

# Do NOT simply read the instructions in here without understanding
# what they do, if you are unsure consult the online docs. You have been
# warned.

# Originally by Rob McCool

# Dynamic Shared Object (DSO) Support
#
# To be able to use the functionality of a module which was built as a DSO you
# have to place corresponding 'LoadModule' lines at this location so the
# directives contained in it are actually available _before_ they are used.
# Please read the file README.DSO in the Apache 1.3 distribution for more
# details about the DSO mechanism and run 'httpd -l' for the list of already
# built-in (statically linked and thus always available) modules in your httpd
# binary.
#
# Example:
# LoadModule foo_module libexec/mod_foo.so

# ServerType is either inetd, or standalone.

ServerType standalone

# If you are running from inetd, go to "ServerAdmin".

# Port: The port the standalone listens to. For ports < 1023, you will
# need httpd to be run as root initially.

Port A_P_A_C_H_E_B_A_S_E01

# HostnameLookups: Log the names of clients or just their IP numbers
# e.g. www.apache.org (on) or 204.62.129.132 (off)
# The default is off because it'd be overall better for the net if people
# had to knowingly turn this feature on.

HostnameLookups off

# If you wish httpd to run as a different user or group, you must run
# httpd as root initially and it will switch.

# User/Group: The name (or #number) of the user/group to run httpd as.
# On SCO (ODT 3) use User nouser and Group nogroup
# On HPUX you may not be able to use shared memory as nobody, and the
# suggested workaround is to create a user www and use that user.
# NOTE that some kernels refuse to setgid(Group) or semctl(IPC_SET)
# when the value of (unsigned)Group is above 60000;
# don't use Group #-1 on these systems!

```

User nobody
Group nobody

ServerAdmin: Your address, where problems with the server should be
e-mailed.

ServerAdmin root1@H_O_S_T_N_A_M_E.D_O_M_A_I_N

ServerRoot: The directory the server's config, error, and log files
are kept in.
NOTE! If you intend to place this on a NFS (or otherwise network)
mounted filesystem then please read the LockFile documentation,
you will save yourself a lot of trouble.

ServerRoot "O_R_A_C_L_E_A_P_B_A_S_E"

BindAddress: You can support virtual hosts with this option. This option
is used to tell the server which IP address to listen to. It can either
contain "*", an IP address, or a fully qualified Internet domain name.
See also the VirtualHost directive.

#BindAddress *

ErrorLog: The location of the error log file. If this does not start
with /, ServerRoot is prepended to it.

ErrorLog logs/error_log

LogLevel: Control the number of messages logged to the error_log.
Possible values include: debug, info, notice, warn, error, crit,
alert, emerg.

LogLevel warn

The following directives define some format nicknames for use with
a CustomLog directive (see below).

LogFormat "%h %l %u %t \"%r\" %>s %b \"%{Referer}i\" \"%{User-Agent}i\"" combined
LogFormat "%h %l %u %t \"%r\" %>s %b" common
LogFormat "%{Referer}i -> %U" referer
LogFormat "%{User-agent}i" agent

The location of the access logfile (Common Logfile Format).
If this does not start with /, ServerRoot is prepended to it.

CustomLog logs/access_log common

If you would like to have an agent and referer logfile uncomment the
following directives.

#CustomLog logs/referer_log referer
#CustomLog logs/agent_log agent

If you prefer a single logfile with access, agent and referer information
(Combined Logfile Format) you can use the following directive.

#CustomLog logs/access_log combined

PidFile: The file the server should log its pid to

PidFile logs/httpd.pid

ScoreBoardFile: File used to store internal server process information.
Not all architectures require this. But if yours does (you'll know because
this file is created when you run Apache) then you *must* ensure that
no two invocations of Apache share the same scoreboard file.

ScoreBoardFile logs/apache_runtime_status

The LockFile directive sets the path to the lockfile used when Apache
is compiled with either USE_FCNTL_SERIALIZED_ACCEPT or
USE_FLOCK_SERIALIZED_ACCEPT. This directive should normally be left at
its default value. The main reason for changing it is if the logs
directory is NFS mounted, since the lockfile MUST BE STORED ON A LOCAL
DISK. The PID of the main server process is automatically appended to
the filename.

#

#LockFile logs/accept.lock

ExtendedStatus controls whether Apache will generate "full" status
information (ExtendedStatus On) or just basic information (ExtendedStatus
Off) when the server-status Handler is called. The default is Off.

#

#ExtendedStatus On

ServerName allows you to set a host name which is sent back to clients for
your server if it's different than the one the program would get (i.e. use
"www" instead of the host's real name).

#

Note: You cannot just invent host names and hope they work. The name you
define here must be a valid DNS name for your host. If you don't understand
this, ask your network administrator.

If your host doesn't have a registered DNS name, enter its IP address here.

You will have to access it by its address (e.g., http://123.45.67.89)

anyway, and this will make redirections work in a sensible way.

#ServerName new.host.name

Optionally add a line containing the server version and virtual host
name to server-generated pages (error documents, ftp directory listings,
mod_status and mod_info output etc., but not SSI generated documents).

Set to "EMail" to also include a mailto: link to the ServerAdmin.

Set to one of: On | Off | EMail

ServerSignature on

UseCanonicalName: (new for 1.3) With this setting turned on, whenever
Apache needs to construct a self-referencing URL (a url that refers back
to the server the response is coming from) it will use ServerName and
Port to form a "canonical" name. With this setting off, Apache will
use the hostname:port that the client supplied, when possible. This
also affects SERVER_NAME and SERVER_PORT in CGIs.

UseCanonicalName on

CacheNegotiatedDocs: By default, Apache sends Pragma: no-cache with each
document that was negotiated on the basis of content. This asks proxy
servers not to cache the document. Uncommenting the following line disables
this behavior, and proxies will be allowed to cache the documents.

#CacheNegotiatedDocs

```

# Timeout: The number of seconds before receives and sends time out
Timeout 300

# KeepAlive: Whether or not to allow persistent connections (more than
# one request per connection). Set to "Off" to deactivate.

KeepAlive On

# MaxKeepAliveRequests: The maximum number of requests to allow
# during a persistent connection. Set to 0 to allow an unlimited amount.
# We recommend you leave this number high, for maximum performance.

MaxKeepAliveRequests 100

# KeepAliveTimeout: Number of seconds to wait for the next request

KeepAliveTimeout 15

# Server-pool size regulation. Rather than making you guess how many
# server processes you need, Apache dynamically adapts to the load it
# sees --- that is, it tries to maintain enough server processes to
# handle the current load, plus a few spare servers to handle transient
# load spikes (e.g., multiple simultaneous requests from a single
# Netscape browser).

# It does this by periodically checking how many servers are waiting
# for a request. If there are fewer than MinSpareServers, it creates
# a new spare. If there are more than MaxSpareServers, some of the
# spares die off. These values are probably OK for most sites ---

MinSpareServers 5
MaxSpareServers 10

# Number of servers to start --- should be a reasonable ballpark figure.

StartServers 5

# Limit on total number of servers running, i.e., limit on the number
# of clients who can simultaneously connect --- if this limit is ever
# reached, clients will be LOCKED OUT, so it should NOT BE SET TOO LOW.
# It is intended mainly as a brake to keep a runaway server from taking
# Unix with it as it spirals down...

MaxClients 150

# MaxRequestsPerChild: the number of requests each child process is
# allowed to process before the child dies.
# The child will exit so as to avoid problems after prolonged use when
# Apache (and maybe the libraries it uses) leak. On most systems, this
# isn't really needed, but a few (such as Solaris) do have notable leaks
# in the libraries.

MaxRequestsPerChild 30

# Proxy Server directives. Uncomment the following line to
# enable the proxy server:

#ProxyRequests On

```

```
# Enable/disable the handling of HTTP/1.1 "Via:" headers.
# ("Full" adds the server version; "Block" removes all outgoing Via: headers)
# Set to one of: Off | On | Full | Block
#ProxyVia on

# To enable the cache as well, edit and uncomment the following lines:
# (no cacheing without CacheRoot)

#CacheRoot @@ServerRoot@@/proxy

#CacheSize 5
#CacheGcInterval 4
#CacheMaxExpire 24
#CacheLastModifiedFactor 0.1
#CacheDefaultExpire 1
#NoCache a_domain.com another_domain.edu joes.garage_sale.com

# Listen: Allows you to bind Apache to specific IP addresses and/or
# ports, in addition to the default. See also the VirtualHost command

#Listen 3000
#Listen 12.34.56.78:80

# VirtualHost: Allows the daemon to respond to requests for more than one
# server address, if your server machine is configured to accept IP packets
# for multiple addresses. This can be accomplished with the ifconfig
# alias flag, or through kernel patches like VIF.

# Any httpd.conf or srm.conf directive may go into a VirtualHost command.
# See also the BindAddress entry.

#<VirtualHost host.some_domain.com>
#ServerAdmin webmaster@host.some_domain.com
#DocumentRoot /www/docs/host.some_domain.com
#ServerName host.some_domain.com
#ErrorLog logs/host.some_domain.com-error_log
#TransferLog logs/host.some_domain.com-access_log
#</VirtualHost>

# ***** VIGNETTE ADDITIONS *****
#

AddHandler server-parsed .html

# THESE ARE NON-OPTIONAL SETTINGS. You must provide values for these settings.
# The location of the StoryServer.cfg file for this content application server.
Vgn_SSConfigFile
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/S
toryServer.cfg
#
# The location of the shared library directory of your StoryServer installation
#
Vgn_ShLibDir O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
#
# ***** VIGNETTE ADDITIONS *****
~~~TEMPLATE: \apache\srm.conf
~~~srm.conf
# With this document, you define the name space that users see of your http
```

server. This file also defines server settings which affect how requests are serviced, and how results should be formatted.

See the tutorials at <http://www.apache.org/> for more information.

Originally by Rob McCool; Adapted for Apache

DocumentRoot: The directory out of which you will serve your documents. By default, all requests are taken from this directory, but symbolic links and aliases may be used to point to other locations.

#DocumentRoot "O_R_A_C_L_E_A_P_B_A_S_E/htdocs"
DocumentRoot "O_R_A_C_L_E_V_G_N_B_A_S_E/cas-docs"

UserDir: The name of the directory which is appended onto a user's home directory if a ~user request is recieved.

UserDir public_html

DirectoryIndex: Name of the file or files to use as a pre-written HTML directory index. Separate multiple entries with spaces.

DirectoryIndex index.html

FancyIndexing is whether you want fancy directory indexing or standard

FancyIndexing on

AddIcon tells the server which icon to show for different files or filename extensions

AddIconByEncoding (CMP,/icons/compressed.gif) x-compress x-gzip

AddIconByType (TXT,/icons/text.gif) text/*
AddIconByType (IMG,/icons/image2.gif) image/*
AddIconByType (SND,/icons/sound2.gif) audio/*
AddIconByType (VID,/icons/movie.gif) video/*

AddIcon /icons/binary.gif .bin .exe
AddIcon /icons/binhex.gif .hqx
AddIcon /icons/tar.gif .tar
AddIcon /icons/world2.gif .wrl .wrl.gz .vrm .iv
AddIcon /icons/compressed.gif .Z .z .tgz .gz .zip
AddIcon /icons/a.gif .ps .ai .eps
AddIcon /icons/layout.gif .html .shtml .htm .pdf
AddIcon /icons/text.gif .txt
AddIcon /icons/c.gif .c
AddIcon /icons/p.gif .pl .py
AddIcon /icons/f.gif .for
AddIcon /icons/dvi.gif .dvi
AddIcon /icons/uuencoded.gif .uu
AddIcon /icons/script.gif .conf .sh .shar .csh .ksh .tcl
AddIcon /icons/tex.gif .tex
AddIcon /icons/bomb.gif core

AddIcon /icons/back.gif ..
AddIcon /icons/hand.right.gif README

```

AddIcon /icons/folder.gif ^^DIRECTORY^^
AddIcon /icons/blank.gif ^^BLANKICON^^

# DefaultIcon is which icon to show for files which do not have an icon
# explicitly set.

DefaultIcon /icons/unknown.gif

# AddDescription allows you to place a short description after a file in
# server-generated indexes.
# Format: AddDescription "description" filename

# ReadmeName is the name of the README file the server will look for by
# default. Format: ReadmeName name
#
# The server will first look for name.html, include it if found, and it will
# then look for name and include it as plaintext if found.
#
# HeaderName is the name of a file which should be prepended to
# directory indexes.

ReadmeName README
HeaderName HEADER

# IndexIgnore is a set of filenames which directory indexing should ignore
# Format: IndexIgnore name1 name2...

IndexIgnore .??.* ~*# HEADER* README* RCS

# AccessFileName: The name of the file to look for in each directory
# for access control information.

AccessFileName .htaccess

# The following lines prevent .htaccess files from being viewed by
# Web clients. Since .htaccess files often contain authorization
# information, access is disallowed for security reasons. Comment
# these lines out if you want Web visitors to see the contents of
# .htaccess files. If you change the AccessFileName directive above,
# be sure to make the corresponding changes here.

<Files .htaccess>
order allow,deny
deny from all
</Files>

# TypesConfig describes where the mime.types file (or equivalent) is
# to be found.

TypesConfig conf/mime.types

# DefaultType is the default MIME type for documents which the server
# cannot find the type of from filename extensions.

DefaultType text/plain

# AddEncoding allows you to have certain browsers (Mosaic/X 2.1+) uncompress
# information on the fly. Note: Not all browsers support this.

```


AddEncoding x-compress Z
AddEncoding x-gzip gz

AddLanguage allows you to specify the language of a document. You can
then use content negotiation to give a browser a file in a language
it can understand. Note that the suffix does not have to be the same
as the language keyword --- those with documents in Polish (whose
net-standard language code is pl) may wish to use "AddLanguage pl .po"
to avoid the ambiguity with the common suffix for perl scripts.

AddLanguage en .en
AddLanguage fr .fr
AddLanguage de .de
AddLanguage da .da
AddLanguage el .el
AddLanguage it .it

LanguagePriority allows you to give precedence to some languages
in case of a tie during content negotiation.
Just list the languages in decreasing order of preference.

LanguagePriority en fr de

Redirect allows you to tell clients about documents which used to exist in
your server's namespace, but do not anymore. This allows you to tell the
clients where to look for the relocated document.
Format: Redirect fakename url

Aliases: Add here as many aliases as you need (with no limit). The format is
Alias fakename realname

Note that if you include a trailing / on fakename then the server will
require it to be present in the URL. So "/icons" isn't aliased in this
example.

Alias /icons/ "O_R_A_C_L_E_A_P_B_A_S_E/icons/"

ScriptAlias: This controls which directories contain server scripts.
Format: ScriptAlias fakename realname

#ScriptAlias /cgi-bin/ "O_R_A_C_L_E_A_P_B_A_S_E/cgi-bin/"

If you want to use server side includes, or CGI outside
ScriptAliased directories, uncomment the following lines.

AddType allows you to tweak mime.types without actually editing it, or to
make certain files to be certain types.
Format: AddType type/subtype ext1

For example, the PHP3 module (not part of the Apache distribution)
will typically use:
#AddType application/x-httpd-php3 .phtml
#AddType application/x-httpd-php3-source .phps

AddHandler allows you to map certain file extensions to "handlers",
actions unrelated to filetype. These can be either built into the server
or added with the Action command (see below)
Format: AddHandler action-name ext1

```

# To use CGI scripts:
#AddHandler cgi-script .cgi

# To use server-parsed HTML files
#AddType text/html .shtml
#AddHandler server-parsed .shtml

# Uncomment the following line to enable Apache's send-asis HTTP file
# feature
#AddHandler send-as-is asis

# If you wish to use server-parsed imagemap files, use
#AddHandler imap-file map

# To enable type maps, you might want to use
#AddHandler type-map var

# Action lets you define media types that will execute a script whenever
# a matching file is called. This eliminates the need for repeated URL
# pathnames for oft-used CGI file processors.
# Format: Action media/type /cgi-script/location
# Format: Action handler-name /cgi-script/location

# MetaDir: specifies the name of the directory in which Apache can find
# meta information files. These files contain additional HTTP headers
# to include when sending the document

#MetaDir .web

# MetaSuffix: specifies the file name suffix for the file containing the
# meta information.

#MetaSuffix .meta

# Customizable error response (Apache style)
# these come in three flavors
#
# 1) plain text
#ErrorDocument 500 "The server made a boo boo.
# n.b. the (") marks it as text, it does not get output
#
# 2) local redirects
#ErrorDocument 404 /missing.html
# to redirect to local url /missing.html
#ErrorDocument 404 /cgi-bin/missing_handler.pl
# n.b. can redirect to a script or a document using server-side-includes.
#
# 3) external redirects
#ErrorDocument 402 http://some.other_server.com/subscription_info.html
#

# mod_mime_magic allows the server to use various hints from the file itself
# to determine its type.
#MimeMagicFile conf/magic

# The following directives disable keepalives and HTTP header flushes.
# The first directive disables it for Netscape 2.x and browsers which
# spoof it. There are known problems with these.
# The second directive is for Microsoft Internet Explorer 4.0b2

```

```

# which has a broken HTTP/1.1 implementation and does not properly
# support keepalive when it is used on 301 or 302 (redirect) responses.

BrowserMatch "Mozilla/2" nokeepalive
BrowserMatch "MSIE 4\.0b2;" nokeepalive downgrade-1.0 force-response-1.0

# The following directive disables HTTP/1.1 responses to browsers which
# are in violation of the HTTP/1.0 spec by not being able to grok a
# basic 1.1 response.

BrowserMatch "RealPlayer 4\.0" force-response-1.0
BrowserMatch "Java/1\.0" force-response-1.0
BrowserMatch "JDK/1\.0" force-response-1.0

# ***** VIGNETTE ADDITIONS *****
#
# Optional - set the alias to the StoryServer documentation root if this
#           is the first development content application server
Alias /StoryServer O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/docroot
#
# ***** VIGNETTE ADDITIONS *****
~~~TEMPLATE: \apache\startApache
~~~startApache
#!/bin/ksh

O_R_A_C_L_E_A_P_B_A_S_E/sbin/httpd \
    -f O_R_A_C_L_E_A_P_B_A_S_E/conf/httpd.conf

exit
~~~TEMPLATE: \apache\stopApache
~~~stopApache
#!/bin/ksh

kill -TERM `cat O_R_A_C_L_E_A_P_B_A_S_E/logs/httpd.pid`

exit

```

~DIRECTORY: templates\ics\
 ~~~TEMPLATE: \ics\cnls.en.msg  
 a=a  
 account=Account  
 acctaddress=Address  
 acctcategory=Account Category  
 acctcoupon=Coupons  
 acctloginname=Login Name  
 acctoneclicksetting=1-Click Settings  
 acctpassword=Password  
 acctpasswordverify=Verify Password  
 acctpendingorder=Pending Orders  
 acctpreferences=Preferences  
 accttelephone=Telephone/Email  
 address1=Address line 1  
 address2=Address line 2  
 address3=Address line 3  
 addressmodified=Successfully Added  
 amount=Amount  
 amtforvolumdisc=Amt Toward Volume Discount  
 amountforvolumedisc=Amount Eligible For Volume Discount  
 assistant=Assistant  
 begindate=Valid From  
 bestprice=You Pay  
 billaddr=Billing Address  
 billto=Bill To  
 callback=Call-Me-Back  
 cartpromodisc=Order Discount  
 changecurrency=Change Currency  
 checkout=Checkout  
 city=City  
 clear=Clear  
 clickhere=click here  
 county=County  
 country=Country  
 couponalreadyclipped=Coupon is already clipped.  
 couponexpired=Expired  
 coupons=Promotion Center  
 coupondisc=Promotion Discount  
 couponsect=Promotions in Section  
 couponstore=Promotions in Store  
 couponstoapplytoorder=Available Coupons  
 couponstoapply=Coupon Qty  
 cpnsandspecialoffers=Coupons and Special Offers  
 custname=Customer Name  
 date=Date  
 dayphone=Telephone (Day)  
 description=Description  
 dualprccat=Show prices in 2 currencies  
 echost==H\_O\_S\_T\_N\_A\_M\_E.D\_O\_M\_A\_I\_N:O\_A\_S\_B\_A\_S\_E21  
 email=E-mail  
 emailaddress=Address  
 emaildescription=Comments  
 emailservice=Email Service  
 emptyaddrfields=Please make sure address line 1, city and country values are specified.  
 emptynamefields=Please specify both first and last names.  
 emptypasswdfields=Please specify old and new passwords.  
 enddate=Valid To  
 eveningphone=Telephone (Eve)

faxphone=Fax Number  
 firstcurrencychoice=1st Currency Choice  
 firstname=First Name  
 guest=Guest  
 HostName=http%3A%2F%2FH\_O\_S\_T\_N\_A\_M\_E%2Eus%2Eoracle%2Ecom%3A6521%2F  
 iagree=I Agree  
 idonotagree=I Do Not Agree  
 ifyouarenot=If you are not  
 incorrectaddrinfo=Please make sure all mandatory fields are filled in, the address is  
 valid and that the Shipping as Billing option is selected if no Shipping address is  
 specified.  
 invalidloginname=Login name is invalid :  
 invalidloginnamesample=invalid characters.  
 invalidordernumber=Invalid order number.  
 invalidordernumberpassword=Invalid order number/password.  
 invalidpromotion= Invalid Promotion  
 invalidqtyfield=Quantity fields must be numeric and greater than 0.  
 invcouponquantity=Invalid coupon quantity applied.  
 invloginfields=Please fill in all fields and make sure that the password fields match.  
 invpasswd=Invalid Password  
 invalidselection=Nothing selected  
 lastname=Last Name  
 licenseLevel=License Level  
 linenumber=Item#  
 login=Login  
 logininformation=Login Information  
 logout=Logout  
 mandatoryfield=Mandatory field  
 maxorderamtexceeded=Purchase exceeds maximum allowable amount for store.  
 maxorderitmqtyexceeded=Exceeded maximum number of items that can be ordered per line  
 item.  
 modify=Modify  
 name=Name  
 newpasswd=New Password  
 newpasswdmismatch=New passwords are not the same  
 next=Next  
 nocouponsavailable=No coupons available to apply.  
 notaxsoftwarefound=Unable to verify address with the tax software.  
 numinstock=Number in Stock  
 oldpasswd=Old Password  
 oneclicksettingsupdated=1-Click Settings Successfully Updated  
 oneclicksettingsenable=Enable 1-Click Purchases  
 oneclicksettingsmandatoryitems=Items with \* are mandatory.  
 oneclickpmtccnum= Credit Card Number  
 oneclickpmtccexpmm= Expiration Date: MM  
 oneclickpmtccexpyy= YY  
 ordemailflag=Send me email about your products  
 ordemailpmt=Email Address  
 ordernumber=Order #  
 ordershippingfee=Order Shipping Fee  
 orderstatus=Order Status  
 ordersubtotal=Sub Total  
 origunitprice=List Price  
 orderauthmessage=Please select a password, this will be used when checking the status of  
 an order.  
 orderauthpassword=Check Order Status Password  
 orderselectauthpassword=Please enter the password.  
 ots\_country\_code=Country Code  
 ots\_comments=Notes

ots\_customer\_id=Customer Identifier  
 ots\_failure\_message=Callback request has failed. Please contact telephony server administrator.  
 ots\_invalidPhone\_message=Invalid Phone Number or Country Code. Please check your Phone number and country code and try again.  
 ots\_notesToLong\_message=Notes field must be less than 512 characters.  
 ots\_noteswarning=Notes must be less than 512 characters.  
 ots\_success\_message=Callback request has been successfully processed.  
 ots\_telephone\_number=Area Code & Phone No.  
 ots\_telephone\_extension=Extension  
 outofstock=Not enough items in stock  
 partnumber=Part #  
 passwdchanged=Password changed successfully  
 passwordinformation=Password Information  
 paymethod=Payment Method  
 perscommerceoff=Disable Personalized View  
 perscommerceon=Enable Personalized View  
 personalinfo=Personal Information  
 phone=Telephone  
 platform=Platform  
 postalcode=Zip/Postal Code  
 preferencesmodified=Successfully added  
 price=Price  
 pricecategories=Price Category  
 pricecategorychangeerror=Cannot change price category.  
 pricerange=Price Range  
 productage=Product Age  
 promo=Promotion  
 promocode=Promo Code  
 promoctr=Promotion Center  
 promoctrwelcome=Here are all the promotions we would like to offer you throughout the store.  
 promotionadd=Promotion Successfully Added  
 proxyhost=P\_R\_O\_X\_Y\_S\_E\_R\_V\_E\_R  
 proxyport=P\_R\_O\_X\_Y\_P\_O\_R\_T  
 quantity=Quantity  
 Register\_Attribute1=Password hint question  
 Register\_Attribute2=Password hint answer  
 registration=Registration  
 regularprice=Regular  
 regularunitprice=Reg. Unit Price  
 removeitem=Remove  
 saleprice=Sale  
 sales=Sales  
 salesect=Sale in Section  
 salestore=Sale in Store  
 savedtotal=Total Saving Amt  
 score=Score  
 searchdatatofetch=Search data to fetch  
 searchon=Search On  
 secondcurrencychoice=2nd Currency Choice  
 sectionsearch=Section Search  
 select=Select  
 shcrtitemadded=item(s) successfully added to shopping cart  
 shipaddr=Shipping Address  
 shipdate=Ship Date  
 shipmethod=Shipment Method  
 shippingasbillingaddr=Shipping as Billing Address  
 shippingfee=Shipping & Handling



```

connectstring= O_R_A_C_L_E_S_I_D

; NLS
; ---
nls_language= en

; Application directories
; -----
oec_home= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec
oracle_home= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E
store_doc_dir= .
store_instance_dir= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/stage/store
output_dir= /tmp

; -----
; Begin web session related parameters
; -----

; use_cookie= [true/false] (true if undefined)
; if "true", session info will be passed in a browser cookie
; if "false" it will be in URL or in a hidden field in forms
use_cookie= false

; cookie_encryption_key= [key] (no encryption if undefined)
; key using which the session info will be encrypted
cookie_encryption_key= a

; url_timeout_period= [time in minutes] (no timeout if undefined)
; period of inactivity after which a page times out and forces the
; shopper to restart. applicable only when use_cookie=false
; nb: if using frames, the menu frame is inactive most of the time
;url_timeout_period= 30

; timeout_url= [url] (by default, goes to ecexpiredpage.<nls>.htm)
; url where the shopper is taken if a page times out.
; this is obsolete. ecexpiredpage.<nls>.htm is always used

; cookie_expiration= [time in days] (if undefined, never expires)
; period after which browser cookie expires
; applicable only when use_cookie is true
cookie_expiration= 60

; domainname= [domain name]
; domain associated with browser cookie. required if using cookies
; Please ensure that there are atleast two dots in the domain name
; for eg us.oracle.com or .abc.com but not just abc.com
domainname= .us.com

; -----
; End web session related parameters
; -----

; -----
; Customer interface specific parameters
; -----
customer_root= cec
html_cache_on= true
log_requests= false

```



```

country_config_file= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/config/country.cfg
check_price_list= false
display_ics_invoice= true
;if you don't take PO number online, set always_using_faxed_po to true
;always_using_faxed_po= true
;Set the following parameter to true if you need to recalculutate
;the promotions after a valid promo code is entered
recalculate_promotions= false
;Set the following parameter to true if you need to reset the promotion
;code entered by the user; the reset will happen at the time of authorizing
;the payment.
reset_promocodes= false

; Third Party options
; -----
oecinvitm_config_file=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/config/oecinvitm.cfg
taxware_config_file= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/config/taxware_staging.cfg
orainvitm_config_file= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/config/orainvitm.cfg

; Log server parameters
; -----
log_level= 11
enable_logging= false
debug_console= false

; Cache parameters
; -----
cache_on= true
store_cache_size= 1
sect_cache_size= 50
prd_cache_size= 100
prditm_cache_size= 200
cpn_cache_size= 100

;Affiliate Tracking - tracking do methods
; -----
eceshctlink= true
eceprodlinksku= true
ecorderinvoice=true
ecehome=true
eceseachlink=true
eceseclink=true
eceprodlinkp=true

;Volume discount configuration
;if volume discount should be taxed, set vlumdisc_for_tax to true
;vlumdisc_for_tax = true
;if volume discount is required along with coupon, set vlumdisc_with_cpn to true
e
;vlumdisc_with_cpn= true

; iPayment 3.1.0 Integration Parameters
; -----
;=====
;| If you want to use HTTPS ( or SSL ) to communicate with
;| the iStore customer for iPaymentPay page which lets the
;| customer input the Credit Card Number, you should set
;| using_ssl as true. But you should set up a SSL port

```

```

;| manually through OAS Node Manager by yourself
;=====
;using_ssl= false
;=====
;| If you set using_ssl as true and you already set up a
;| SSL port manually through OAS Node Manager, you will
;| set ssl_host_name as that fully qualified OAS machine
;| name, Ex: a.b.com
;=====
;ssl_host_name= [full qualified machine name]
;=====
;| If you set using_ssl as true and you already set up a
;| SSL port manually through OAS Node Manager, you will
;| set ssl_port as the port number you set up for cstage
;| listener using SSL under OAS Node Manager
;=====
;ssl_port= [ssl port number you already set up in OAS]
;=====
;| If you set using_ssl as true and you already set up a
;| SSL port manually through OAS Node Manager, you should
;| also set this host_name as that fully qualified OAS
;| machine name which non-ssl port is running, Ex: a.b.com
;=====
;host_name= [full qualified machine name]
;=====
;| If you set using_ssl as true and you already set up a
;| SSL port manually through OAS Node Manager, you should
;| also set this host_port as the port number you set up
;| for cstage listener not using SSL under OAS Node Manager
;=====
;host_port= [non-ssl port number you set up in OAS]
;=====
;| If you want to use HTTPS ( or SSL ) to communicate
;| between the iStore Server and iPayment Server, you
;| should set this ipayment_using_ssl as true ( the default
;| is false ). For making this work, you should follow the
;| OAS Administration Manual and iPayment Manual to config
;| both OAS running iStore and OAS running iPayment
;| correctly. And you should set up the followed two
;| parameters.
;=====
ipayment_using_ssl = false
;=====
;| If you set the ipayment_using_ssl as true, you need set
;| this ipayment_oas_wallet_loc as the directory you put
;| the oracle wallet for SSL certification, you should follow
;| the OAS Administration Manual and iPayment Manual to config
;| both OAS running iStore and OAS running iPayment correctly.
;=====
ipayment_oas_wallet_loc = [directory you put oracle wallet]
;=====
;| If you set the ipayment_using_ssl as true, you need set
;| this ipayment_oas_wallet_pass as the password you use to
;| access your oracle wallet, you should follow the OAS
;| Administration Manual and iPayment Manual to config both
;| OAS running iStore and OAS running iPayment correctly.
;=====
ipayment_oas_wallet_pass = [ password used to access your oracle wallet]

```

```

; List of Sensitive methods
; List contains comma-separated list of methods which need a secure mode of
; access(Authentication, in the form of credentials)
;-----
;sensitive_methods =
ecacctroot,ecacctaddress,ecacctpasswd,ecacctpreferences,ecaccttelephone,ecacheckout,ecche
ckout,econeclicksetting,ecauthpmt

; Net Perceptions Integration Parameters
; -----

; When set to false, iStore will not send any ratings to Net Perceptions.
; To completely disable the integration with Net Perceptions, be sure to remove
; any Net Perceptions-enabled templates from the store.
netp_enabled = true

; The hostname of the machine where the Net Perceptions recommendation engine
; is located.
netp_hostname = dallsoluctrsv01

; This is name that the Orbix ORB uses to communicate with the Net Perceptions
; recommendation engine. It is specified during the installation of Net
; Perceptions.
netp_servername = prod

; When set to true, iStore will send ratings to Net Perceptions whenever a
; Product Item detail page is viewed. <netp_enabled> must be set to true for
; this parameter to be active.
netp_enabled.sync_browse = true

; When set to true, iStore will send ratings to Net Perceptions whenever a
; Product Item is purchasded. <netp_enabled> must be set to true for
; this parameter to be active.
netp_enabled.sync_purchase = true

; ISPEED PARAMS
-----
; BROWSER CHAR SET
; ---
browser_char_set= WE8ISO8859P1
browser_char_set_isocode= ISO-8859-1
jdbcstring= jdbc:oracle:oci8
maxconnections= 10
timeout= 60

; End of configuration file cstage.cfg
; -----
~~~TEMPLATE: \ics\gatekeeper.ior
#!/bin/sh

echo "Content-type:text/html"
echo
cat O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/iors/gatekeeper.ior
~~~TEMPLATE: \ics\mstage.cfg
; -----
; Start of configuration file mstage.cfg

; =====
; Oracle Internet Commerce

```

```

;
; Merchant - Store Manager - Configuration File (Staging System)
; =====

; Database connectivity
; -----
username= SDOSfits
password= SDOSfits
connectstring= O_R_A_C_L_E_S_I_D

; NLS
; ---
nls_language= en

; Store Manager specific parameters
; -----
merchant_root= oec
html_cache_on= true
country_config_file= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/config/country.cfg

; Third Party options
; -----
oecinvitm_config_file=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/config/oecinvitm.cfg
taxware_config_file= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/config/taxware_staging.cfg
orainvitm_config_file= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/config/orainvitm.cfg

; Application directories
; -----
oec_home= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec
oracle_home= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E
store_doc_dir= .
store_instance_dir= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/oec/storemgr
output_dir= /tmp

; Log Server parameters
; -----
log_level= 1
log_port= 9000
log_server_hostname=
enable_logging= false
debug_console= false

; Net Perceptions Integration Parameters
; -----

; When set to false, iStore will not send any ratings to Net Perceptions.
; To completely disable the integration with Net Perceptions, be sure to remove
; any Net Perceptions-enabled templates from the store.
netp_enabled = true

; The hostname of the machine where the Net Perceptions recommendation engine
; is located.
netp_hostname = dallsoluctrsv01

; This is name that the Orbix ORB uses to communicate with the Net Perceptions
; recommendation engine. It is specified during the installation of Net
; Perceptions.
netp_servername = prod

```

```

; End of configuration file mstage.cfg
; -----
~~~TEMPLATE: \ics\oecinvtm.cfg
; -----
; Start of configuration file oecinvtm.cfg

; =====
; Oracle Internet Commerce
;
; Oracle Inventory Item Configuration File
; =====

; Oracle Inventory Item environment variables
;

; Database connection
;
; NOTE: A separate config file should be created if you need different
; testing and deployment database accounts.
;
oectpinv_username= OECTPDfits
oectpinv_password= OECTPDfits
oectpinv_connectstring= O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E

; End of configuration file oecinvtm.cfg
; -----
~~~TEMPLATE: \ics\owsenv_bsh.sh
#
# This is a Bourne Shell script for setting up your environment variables.
#
if [ -z "$LD_LIBRARY_PATH" ]
then
    LD_LIBRARY_PATH=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/lib:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/jdk/lib:sparc/native_threads:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ots/1.0/lib:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/lib ; export LD_LIBRARY_PATH
else
    LD_LIBRARY_PATH=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/lib:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/jdk/lib:sparc/native_threads:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ots/1.0/lib:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/lib:${LD_LIBRARY_PATH} ; export LD_LIBRARY_PATH
fi

if [ -z "$PATH" ]
then
    PATH=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/bin:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ots/1.0/bin:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/jdk/bin:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/bin; export PATH
else
    PATH=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/bin:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ots/1.0/bin:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/jdk/bin:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/bin:${PATH}; export PATH
fi

if [ -z "$CLASSPATH" ]
then
    CLASSPATH=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/classes/ecoapi.jar:O_R_A_C_L_E_O_A_S_P_R_O

```

```

else
    CLASSPATH=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/classes/ecoapi.jar:O_R_A_C_L_E_O_A_S_P_R_O
fi

if [ -z "$MANPATH" ]
then
    MANPATH=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc; export MANPATH
else
    MANPATH=${MANPATH}:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc; export MANPATH
fi

ORACLE_HOME=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E ; export ORACLE_HOME
ORAWEB_HOME=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0 ; export ORAWEB_HOME
ORAWEB_SITE=O_A_S_S_I_T_E_N_A_M_E ; export ORAWEB_SITE
ORAWEB_ADMIN=O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows; export ORAWEB_ADMIN
ORB_HOME=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0; export ORB_HOME
ORAWEB_NAMEROOT=./applications/oracle/OAS; export ORAWEB_NAMEROOT
JRE_HOME=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/jdk; export JRE_HOME

if [ "us" = "ja" ]
then
    NLS_LANG="JAPANESE_JAPAN.JA16EUC"; export NLS_LANG
elif [ "us" = "zhs" ]
then
    NLS_LANG="SIMPLIFIED CHINESE_CHINA.ZHS16GBK"; export NLS_LANG
elif [ "us" = "ptb" ]
then
    NLS_LANG="BRAZILIAN PORTUGUESE_BRAZIL.WE8ISO8859P1"; export NLS_LANG
else
    NLS_LANG=; export NLS_LANG
fi

ORACLE_BASE=O_R_A_C_L_E_O_A_S_B_A_S_E ;export ORACLE_BASE
ORAORB_SITE=O_A_S_S_I_T_E_N_A_M_E ;export ORAORB_SITE
~~~TEMPLATE: \ics\perlidl
#!/bin/sh O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/./cartx/common/perl/bin/perl

Perl source file used to compile IDL to perl client mappings

This script generates perl and java stubs for an IDL file. Java stubs
are generated because perl stubs uses them to communicate to the ORB

The programmer who uses perl stubs is not aware of the java mappings
and should use this script to generate both perl and java stubs for
a particular IDL and use the perl stubs (mappings) in his/her perl
programs/scripts

Usage : perlidl <otherflags> -o <dir> <otherflags> IDLfile

my $debug = 0;

if($#ARGV < 0) {
 print "Usage: perlidl [-o <dir>] <flags> IDLfile\n";
 exit;
}

$outarg = 0;
OUTER:
for($i = 0; $i < $#ARGV; $i++) {
 if ($ARGV[$i] eq "-o") {

```

```

 $outarg = $i + 1;
 last OUTER;
 }
}

if($^O =~ m/Win32/) {
 $P = "\\\";
 $C = ";";
}
else {
 $P = "/";
 $C = ":";
}

default output directory should be stuffed in args
if (!$outarg) {
 $default_path = 1;
 my $tail = $#ARGV;
 my $tailarg = $ARGV[$tail];

 $ARGV[$tail] = '-o';
 $ARGV[$tail + 1] = "O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0" .
"$P}..$P}cartx$P}livehtml$P}stubs";
 die "Installation is not complete: " . $ARGV[$tail + 1] . " not found.\n"
 if(!opendir DIR, $ARGV[$tail + 1]);
 closedir DIR;
 $outarg = $tail + 1;
 $ARGV[$tail + 2] = $tailarg;
}

mkdir $ARGV[$outarg], 0755;
@perlARGV = @ARGV; $perlARGV[$outarg] .= "$P}perl"; mkdir $perlARGV[$outarg], 0755;
@javaARGV = @ARGV; $javaARGV[$outarg] .= "$P}java"; mkdir $javaARGV[$outarg], 0755;

use File::Find;

@javafiles = ();
sub findjavafiles {
 my $javafile;
 if ($File::Find::name =~ /\.java/)
 {
 $javafile = $File::Find::name;
 $javafile =~ s/\\/\/$P}/g;
 push @javafiles, $javafile;
 }
}

Generate perl stubs
@args = ("O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0$P}bin$P}perlidl.exe", @perlARGV);
print "Generating Perl stubs ...\n";
print " Executing @args\n" if $debug;
system(@args) == 0
 or die "$args[0]: $!\n";
print "Please include $perlARGV[$outarg] in your PERLLIB environment variable" .
 (!$default_path ? " and LiveHTML Perl Application Library Path" : "") .
 ".\n";

Generate java stubs
@args = ("O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0$P}bin$P}wrbjidl", @javaARGV);

```

```

$| = 1;
print "Generating Java stubs for Perl stubs .";
print " Executing @args\n" if $debug;
system(@args) == 0
 or die "$args[0]: $!\n";

Compile those java stubs with javac
my @javacargs = ("-classpath",
"O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0${P}jdk${P}lib${P}classes.zip${C}O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0${P}classes${P}wrjidl.jar${C}O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0${P}classes${P}services.jar${C}O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0${P}classes${P}cosnam.jar${C}O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0${P}classes${P}jcorba.jar${C}");

chdir $javaARGV[$outarg];
find(\&findjavafiles, ".");

while (@javafiles) {
 my @args = ("O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0${P}jdk${P}bin${P}javac",
 @javacargs, splice(@javafiles, 0, 5));
 print " Executing @args\n" if $debug;
 system(@args) == 0
 or die "$args[0]: $!\n";
 print ".";
}
print "\nPlease include $javaARGV[$outarg] in your CLASSPATH environment variable" .
 (!$default_path ? " and LiveHTML environment section" : "") . ".\n";
~~~TEMPLATE: \ics\primary.dat
Host=H_O_S_T_N_A_M_E.D_O_M_A_I_N
Port=O_A_S_N_O_D_E_P_O_R_T
Site=O_A_S_S_I_T_E_N_A_M_E
~~~TEMPLATE: \ics\profile
ORACLE_BASE=O_R_A_C_L_E_O_A_S_B_A_S_E; export ORACLE_BASE
ORACLE_HOME=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E; export ORACLE_HOME
ORAWEB_HOME=$ORACLE_HOME/ows/4.0; export ORAWEB_HOME
ORAWEB_ADMIN=$ORACLE_BASE/admin/ows; export ORAWEB_ADMIN
ORACLE_SID=O_R_A_C_L_E_S_I_D; export ORACLE_SID
THREADS_FLAG=native; export THREADS_FLAG
ORAORB_SITE=O_A_S_S_I_T_E_N_A_M_E; export ORAORB_SITE
ORAWEB_SITE=O_A_S_S_I_T_E_N_A_M_E; export ORAWEB_SITE
LD_LIBRARY_PATH=$ORACLE_HOME/lib:$ORAWEB_HOME/lib:/usr/dt/lib:/usr/openwin/lib:$ORACLE_HO
ME/jdbc/lib; export LD_LIBRARY_PATH
ORACLE_TERM=xsun5; export ORACLE_TERM
umask 022

PATH=$ORACLE_HOME/bin:/bin:/usr/bin:/usr/ccs/bin:/usr/local/bin:/opt/bin:$ORACLE_BASE/pro
duct/8.0.5/bin:
TMPDIR=/tmp;export TMPDIR
CLASSPATH=$ORACLE_HOME/mocha/mocha.zip:$ORACLE_HOME/oec/java/oec:$ORACLE_HOME/oec/java;ex
port CLASSPATH
MANPATH=$ORACLE_BASE/product/ics/orb/4.0/man
PRINTER=/bin/echo;export PRINTER
TK2_PRINT_STATUS=/bin/echo;export TK2_PRINT_STATUS
TNS_ADMIN=$ORACLE_HOME/network/admin;export TNS_ADMIN
. O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/install/owsenv_bsh.sh

NLS_LANG=AMERICAN_AMERICA.WE8ISO8859P1; export NLS_LANG

#stty erase

```



```

---TEMPLATE: \ics\profile.old
ORACLE_BASE=T_O_O_L_S_D_I_R/oracle; export ORACLE_BASE
ORACLE_HOME=$ORACLE_BASE/product/ics; export ORACLE_HOME
ORAWEB_HOME=$ORACLE_HOME/ows/4.0; export ORAWEB_HOME
ORAWEB_ADMIN=$ORACLE_BASE/admin/ows; export ORAWEB_ADMIN
ORACLE_SID=O_R_A_C_L_E_S_I_D; export ORACLE_SID
THREADS_FLAG=native; export THREADS_FLAG
ORAORB_SITE=website40;export ORAORB_SITE
ORAWEB_SITE=website40;export ORAWEB_SITE
LD_LIBRARY_PATH=$ORACLE_HOME/lib:$ORAWEB_HOME/lib:/usr/dt/lib:/usr/openwin/lib:$ORACLE_HO
ME/jdbc/lib; export LD_LIBRARY_PATH
ORACLE_TERM=xsun5; export ORACLE_TERM
umask 022

PATH=$ORACLE_HOME/bin:/bin:/usr/bin:/usr/ccs/bin:/usr/local/bin:/opt/bin:$ORACLE_BASE/pro
duct/8.0.5/bin:
TMPDIR=/tmp;export TMPDIR
CLASSPATH=$ORACLE_HOME/mocha/mocha.zip:$ORACLE_HOME/oec/java;export CLASSPATH
MANPATH=$ORACLE_BASE/product/ics/orb/4.0/man
PRINTER=/bin/echo;export PRINTER
TK2_PRINT_STATUS=/bin/echo;export TK2_PRINT_STATUS
TNS_ADMIN=$ORACLE_HOME/network/admin;export TNS_ADMIN
. $ORACLE_BASE/product/ics/ows/4.0/install/owsenv_bsh.sh

NLS_LANG=AMERICAN_AMERICA.US7ASCII;export NLS_LANG
---TEMPLATE: \ics\rmproxy.ior
#!/bin/sh
. O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/install/owsenv_bsh.sh

echo "Content-type:text/html"
echo
$ORAWEB_HOME/bin/owsctl getIOR -w wrbrmpxy -force
---TEMPLATE: \ics\server.dfl
[NetInfo]
MaxConnectCount = 338
DNSResolution = NEVER
ServerPID = /tmp/ServerPID
;
;
; Log Information
;
; Set values for ...
; LogDir ... Place for all log files
; LogInfoFile ... Information (Audit) Log file
; LogErrorFile ... Error Log File
;
[LogParams]
TimeStyle = GMT
AdminFile = /tmp/LogError
;
;
; Server Parameters
;
; Set values for ...
; RequestTimeout ... Time out for incoming requests
; ResponseTimeout ... Time out for outgoing responses
; ScriptTimeout ... Time out for Script response time
;
[Server]

```

```

InitialFile = wwwIndex.html
DefaultMIMETYPE = application/octet-stream
; UserDir = public_html
; UserDirInitialFile = myinitial.html
DefaultCharset = iso-8859-1
PreferredLanguage = en
ImageMap = map
UseDirIndexing = FALSE
CGITimeout = 900
;
; Secure Information Parameters
;
; Set values for ...
; UserID ... Acquire privileges for User ID
; GroupID ... Acquire privileges for Group ID
;
[SecureInfo]
UserID = nobody
GroupID = other
;
;
; Directory Mappings
;
; List each mapping from a physical directory to a
; virtual directory, including the indicator whether
; the directory contains scripts or whether the
; subdirectories should be mapped recursively (R) or
; non-recursively (N).
;
[DirMaps]
; This first line which has ?/ows/doc needs to be here to keep
; the virtual path ordering correct.
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /

O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin/ CN /ows-bin/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /ows-doc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/img/ NR /ows-img/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/img/ NR /ows-aimg/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/doc/ NR /ows-adoc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/classes/ NR /ows-vbclasses/
;
;
; File Cache
;
; List the full virtual filename path or wild-card
; expression denoting one or more files in the Server's
; virtual file system.
;
[FileCache]
;/products/*
;/products/xr25/Version*.c
;/employees/list/phones
;
;
; Language Extensions
;
; List for each combination of language type
; and character set one or more unique
; extensions.

```

```

;
[LangExt]
en iso-8859-1 eng
en unicode-1-1 engU uc
fr-CA iso-8859-1 frc
fr-FR iso-8859-1 fr
jp-JP iso-2022-jp jp
jp-JP unicode-1-1-utf-8 jpU
;
;
; MIME Types
;
; List for each combination of MIME Type
; and representation one or more unique
; extensions.
;
[MIMETypes]
text/html htm html
image/jpeg jpg jpeg
image/gif gif
appl/text doc
text/plain txt ksh lst
application/pdf pdf
application/postscript ps
model/vrml wrml vrml
video/mpeg mpeg mpg mpe

;
[Encodings]
compress Z
gzip gz
;

;
;The ordering of the DynApps should not be changed
[DynApps]
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/ndwfss.so oracle_adp_init
~~~TEMPLATE: \ics\startWEB
#!/bin/sh
# Start the application server processes.
owsctl start
owsctl start -nodemgr
exit
~~~TEMPLATE: \ics\stopWEB
#!/bin/sh
Stop the application server processes.
owsctl stop
owsctl stop -nodemgr
exit

```

```

~DIRECTORY: templates\netp\
~~~TEMPLATE: \netp\cshprofile
#!/bin/csh
#
# Copyright 1998 Net Perceptions, Inc. All Rights Reserved.
#
# Environment configuration file for csh based shells. Please source
# this file before running any Net Perceptions for E-commerce command.
#
# Net Perceptions for E-commerce configuration variables not in
# this script should be set using the modify_configuration_variable
# command in netpadmin. See your manual for more details.

if ( ! $?ORACLE_HOME ) then
    setenv ORACLE_HOME O_R_A_C_L_E_H_O_M_E
endif
if ( ! $?NP_HOME ) then
    setenv NP_HOME O_R_A_C_L_E_N_P_B_A_S_E
endif
if ( ! $?NP_DBROOT ) then
    setenv NP_DBROOT O_R_A_C_L_E_N_P_B_A_S_E/config
endif
if ( ! $?NP_ROOT ) then
    setenv NP_ROOT NamingService:O_R_A_C_L_E_S_I_D
endif
if ( ! $?NP_MODE ) then
    setenv NP_MODE Key
endif
if ( ! $?ORBIX_NAMES ) then
    setenv ORBIX_NAMES O_R_A_C_L_E_N_P_B_A_S_E/iona/OrbixNames1.1c
endif
if ( ! $?ORBIX_MT ) then
    setenv ORBIX_MT O_R_A_C_L_E_N_P_B_A_S_E/iona/OrbixMT_2.3c
endif

# The following variable defines the service name offered by CORBA.

if ( ! $?NP_SERVNAME ) then
    setenv NP_SERVNAME O_R_A_C_L_E_S_I_D
endif

# verify some values.

if ( ( "$ORACLE_HOME" == "" ) || \
    ( "$NP_HOME" == "" ) || ( "$NP_DBROOT" == "" ) || \
    ( "$NP_MODE" == "" ) || ( "$NP_ROOT" == "" ) || \
    ( "$ORBIX_NAMES" == "" ) || ( "$ORBIX_MT" == "" ) || \
    ( "$NP_SERVNAME" == "" ) ) then
    echo "ERROR: Initial Net Perceptions environment variables are not set."
    echo "    Please edit config/cshprofile and set the initial variables and rerun
script."
    exit 1
endif

if ( ! -d "$ORACLE_HOME" ) then
    echo "ERROR: Directory specified by ORACLE_HOME environment variable is not
accessible."
    echo "    Please update config/cshprofile and rerun it."
    exit 1
endif

```

```
endif

# Set the IONA variables

setenv IT_CONFIG_PATH $NP_HOME/iona

# Update PATH

setenv PATH "$PATH":$NP_HOME/bin:$ORACLE_HOME/bin:$NP_HOME/jre/bin

# Update LD_LIBRARY_PATH

if ( ! $?LD_LIBRARY_PATH ) setenv LD_LIBRARY_PATH ""

setenv LD_LIBRARY_PATH
"$LD_LIBRARY_PATH":$NP_HOME/lib:$ORACLE_HOME/lib:$NP_HOME/lib/rw:$ORBIT_NAMES/lib:$ORBIT_
MT/lib

# Set NP_CLASSPATH

setenv NP_CLASSPATH
.:$NP_HOME/iona:$NP_HOME/java/NetPerceptionsN.jar:$NP_HOME/java/NetPerceptionsI.jar:$NP_H
OME/java/OrbitWeb_3.0.4.jar:$NP_HOME/examples

#
# Set path to web browser,
# used to display online help from applications like netpmanage
#
if ( ! $?NP_BROWSER ) then
    setenv NP_BROWSER /opt/netscape/netscape
endif
~~~TEMPLATE: \netp\env.cfg
#
This file is automatically generated and maintained by the Net Perceptions(TM)
Recommendation Engine. Do not modify, or this software may not work correctly
#
NP_BIN O_R_A_C_L_E_N_P_B_A_S_E/bin
NP_DBDRIVER ORACLE8
NP_DBPASS N_P_D_B_P_A_S_S
NP_DBSRC O_R_A_C_L_E_S_I_D
NP_DBUSER N_P_D_B_U_S_E_R
NP_LICENSE_FILE O_R_A_C_L_E_N_P_B_A_S_E/config/netp.license
NP_SHMEM_ID N_E_T_P_P_O_R_T
~~~TEMPLATE: \netp\Orbit.cfg

# This file contains the default values for Orbit system configuration.
# =====
#
# Below are listed the main orbit environment configuration variables
# and associated default values.
#
# A orbit client, server or daemon will use these values
# if, and only if, the relevant unix environment
# variable is not defined.

IT_ORBIT_HOME          O_R_A_C_L_E_N_P_B_A_S_E/iona

IT_ERRORS              $(IT_ORBIT_HOME)/ErrorMsgs
IT_IMP_REP_PATH        $(IT_ORBIT_HOME)/ImpRep
```

```

IT_INT_REP_PATH                $(IT_ORBIX_HOME)/IntRep
IT_LOCATOR_PATH                $(IT_ORBIX_HOME)/Locator
IT_LOCAL_DOMAIN                D_O_M_A_I_N
IT_NAMES_PATH                  $(IT_ORBIX_HOME)/NamesRep
IT_DAEMON_PORT                 N_E_T_P_P_O_R_T

IT_DEFAULT_CODE
IT_DEFAULT_COMMS
IT_CONNECT_ATTEMPTS            15
IT_DAEMON_SERVER_RANGE         1024
IT_DAEMON_SERVER_BASE          7590
~~~TEMPLATE: \netp\Orbix.hosts
NS: H_O_S_T_N_A_M_E.D_O_M_A_I_N :
IT_daemon: H_O_S_T_N_A_M_E.D_O_M_A_I_N :
~~~TEMPLATE: \netp\OrbixWeb.properties
# OrbixWeb properties file. You really should use "owconfig" to edit this.
# Note that backslash is an escape character in this format, so any paths on
# NT or Windows 95 need to use double backslashes!
#
# (RAW VERSION -- USED BY THE INSTALLATION SCRIPT)
#
OrbixWeb.IT_NS_PORT=N_E_T_P_P_O_R_T
OrbixWeb.IT_ORBIXD_IIOP_PORT=N_E_T_P_P_O_R_T

OrbixWeb.IMPL_IS_READY_TIMEOUT=30000
OrbixWeb.IT_ACCEPT_CONNECTIONS=true
OrbixWeb.IT_ALWAYS_CHECK_LOCAL_OBJS=false
OrbixWeb.IT_ANY_BUFFER_SIZE=512
OrbixWeb.IT_BIND_USING_IIOP=true
OrbixWeb.IT_BUFFER_SIZE=8192
OrbixWeb.IT_CLASSPATH_SWITCH=-classpath
OrbixWeb.IT_CONNECTION_TIMEOUT=300000
OrbixWeb.IT_CONNECT_TABLE_SIZE_DEFAULT=100
OrbixWeb.IT_DAEMON_SERVER_BASE=2000
OrbixWeb.IT_DAEMON_SERVER_RANGE=2000
OrbixWeb.IT_DETECT_APPLET_SANDBOX=true
OrbixWeb.IT_DIRECT_DISPATCH=false
OrbixWeb.IT_DII_COPY_ARGS=false
OrbixWeb.IT_DSI_COPY_ARGS=false
OrbixWeb.IT_HTTP_TUNNEL_HOST=
OrbixWeb.IT_HTTP_TUNNEL_PORT=0
OrbixWeb.IT_HTTP_TUNNEL_PREFERRED=false
OrbixWeb.IT_HTTP_TUNNEL_PROTO=
OrbixWeb.IT_IIOP_LISTEN_PORT=0
OrbixWeb.IT_IIOP_PROXY_HOST=
OrbixWeb.IT_IIOP_PROXY_PORT=0
OrbixWeb.IT_IIOP_PROXY_PREFERRED=false
OrbixWeb.IT_IIOP_USE_LOCATOR=true
OrbixWeb.IT_IMPL_READY_IF_CONNECTED=true
OrbixWeb.IT_INITIAL_REFERENCES=
OrbixWeb.IT_IORS_USE_DNS=true
OrbixWeb.IT_KEEP_ALIVE_FORWARDER_CONN=true
OrbixWeb.IT_LISTENER_PRIORITY=5
OrbixWeb.IT_LOCAL_HOSTNAME=
OrbixWeb.IT_LOCATE_ATTEMPTS=2
OrbixWeb.IT_LOCATOR_HOPS=3
OrbixWeb.IT_MARSHAL_NULLS_OK=true
OrbixWeb.IT_MULTI_THREADED_SERVER=false
OrbixWeb.IT_NAMES_HASH_TABLE_LOAD_FACTOR=0.5

```

```

OrbixWeb.IT_NAMES_HASH_TABLE_SIZE=23
OrbixWeb.IT_NAMES_SERVER=NS
OrbixWeb.IT_NAMES_TIMEOUT=
OrbixWeb.IT_NON_COPYING_ANYS=false
OrbixWeb.IT_NS_HOSTNAME=H_O_S_T_N_A_M_E.D_O_M_A_I_N
OrbixWeb.IT_NS_IP_ADDR=
OrbixWeb.IT_OBJECT_CONNECT_TIMEOUT=-1
OrbixWeb.IT_OBJECT_TABLE_LOAD_FACTOR=0.75
OrbixWeb.IT_OBJECT_TABLE_SIZE=1789
OrbixWeb.IT_ORBIXD_PORT=7570
OrbixWeb.IT_READER_PRIORITY=3
OrbixWeb.IT_REQ_CACHE_SIZE=10
OrbixWeb.IT_SECURITY_AUTHENTICATE_CLIENTS=false
OrbixWeb.IT_SECURITY_DEFAULT_ENTITY=SEC_ENT_INSECURE_SERVER_INSECURE_CLIENT
OrbixWeb.IT_SSL_IIOF_LISTEN_PORT=0
OrbixWeb.IT_TRADING_SERVER=TDR
OrbixWeb.IT_USE_BIDIR_IIOF=false
OrbixWeb.IT_USE_EXTENDED_CAPABILITIES=true
OrbixWeb.Orbix=BOA
OrbixWeb.pingDuringBind=true
OrbixWeb.setDiagnostics=1
#
# These are altered during installation.
#
OrbixWeb.IT_LOCAL_DOMAIN=D_O_M_A_I_N
~~~TEMPLATE: \netp\profile.user
Filename: .profile file for Net P user
This is the default standard profile provided to a user.
They are expected to edit it to meet their own needs.
#

MAIL=/usr/mail/${LOGNAME:?}

ORACLE_BASE="O_R_A_C_L_E_O_A_S_B_A_S_E"
ORACLE_HOME="O_R_A_C_L_E_O_A_S_B_A_S_E/product/OAS4081"
NP_HOME="O_R_A_C_L_E_N_P_B_A_S_E"
export ORACLE_BASE ORACLE_HOME NP_HOME
PATH="$ORACLE_HOME/bin:/usr/ccs/bin:/usr/sbin:/usr/ucb/bin:$PATH"
LD_LIBRARY_PATH="$ORACLE_HOME/lib:/usr/dt/lib:/usr/ucblib:/usr/openwin/lib:/usr/
ccs/lib:/usr/ucb/lib"
export PATH LD_LIBRARY_PATH
TNS_ADMIN="$ORACLE_HOME/network/admin"
ORA_NLS="$ORACLE_HOME/ocommon/nls/admin/data"
export TNS_ADMIN ORA_NLS

ORACLE_SID="O_R_A_C_L_E_S_I_D"; export ORACLE_SID;
NLS_LANG="AMERICAN_AMERICA.WE8ISO8859P1"
export NLS_LANG
NLS_LANGUAGE="AMERICAN"
export NLS_LANGUAGE
NLS_DATE_FORMAT="DD-MON-RR"
export NLS_DATE_FORMAT
NLS_NUMERIC_CHARACTERS="., "
export NLS_NUMERIC_CHARACTERS
NLS_SORT="binary"
export NLS_SORT

. $NP_HOME/config/shprofile
~~~TEMPLATE: \netp\S98orb

```

```

#!/bin/ksh
#
# Copyright 1998 Net Perceptions, Inc. All Rights Reserved.
#

# Set NP_HOME to the directory where Net Perceptions recommendation engine was installed
export NP_HOME="O_R_A_C_L_E_N_P_B_A_S_E/product/netp"

# Set NP_USER to the user who should own the Net Perceptions recommendation engine
processes
NP_USER="oracle"

export NP_BIN="$NP_HOME/bin"

ECHO=/bin/echo
TEST=/bin/test
SU=/bin/su

case "$1" in
'start')
    if $TEST -x $NP_BIN/orbstartup ; then
        $ECHO "Starting Orbix ORB ...\\n"
        $SU $NP_USER -c "$ECHO '. $NP_HOME/config/shprofile; $NP_BIN/orbstartup'
| /bin/sh"
    else
        $ECHO "$NP_BIN/orbstartup does not exist, cannot start Orbix ORB"
    fi
;;
'stop')
    if $TEST -x $NP_BIN/orbshutdown ; then
        $SU $NP_USER -c "$ECHO '. $NP_HOME/config/shprofile; $NP_BIN/orbshutdown'
| /bin/sh"
    fi
;;
*)
    $ECHO "Usage: $0 { start | stop }"
;;
esac
exit 0
~~~TEMPLATE: \netp\S99netp
#!/bin/ksh
#
Copyright 1998 Net Perceptions, Inc. All Rights Reserved.
#

Set NP_HOME to the directory where Net Perceptions recommendation engine was installed
export NP_HOME="O_R_A_C_L_E_N_P_B_A_S_E"

Set NP_USER to the user who should own the Net Perceptions recommendation engine
processes
NP_USER="oracle"

export NP_BIN="$NP_HOME/bin"

ECHO=/bin/echo

```



```

TEST=/bin/test
SU=/bin/su

case "$1" in

'start')
 if $TEST -x $NP_BIN/netpstartup ; then
 $ECHO "Starting Net Perceptions recommendation engine ...\n"
 $SU $NP_USER -c "$ECHO '. $NP_HOME/config/shprofile; $NP_BIN/netpstartup'
| /bin/sh"
 else
 $ECHO "$NP_BIN/netpstartup does not exist, cannot start Net Perceptions
recommendation engine"
 fi

;;

'stop')
 if $TEST -x $NP_BIN/netpshutdown ; then
 $SU $NP_USER -c "$ECHO '. $NP_HOME/config/shprofile;
$NP_BIN/netpshutdown' | /bin/sh"
 fi

;;

*)
 $ECHO "Usage: $0 { start | stop }"
 ;;

esac
exit 0
~~~TEMPLATE: \netp\shprofile
#!/bin/sh
#
# Copyright 1998 Net Perceptions, Inc. All Rights Reserved.
#
# Environment configuration file for sh based shells. Please source
# this file before running any Net Perceptions for E-commerce command.
#
# Net Perceptions for E-commerce configuration variables not in
# this script should be set using the modify_configuration_variable
# command in netpadmin. See your manual for more details.

if [ -z "$ORACLE_HOME" ] ; then
    ORACLE_HOME=O_R_A_C_L_E_H_O_M_E
    export ORACLE_HOME
fi
if [ -z "$NP_HOME" ] ; then
    NP_HOME=O_R_A_C_L_E_N_P_B_A_S_E
    export NP_HOME
fi
if [ -z "$NP_DBROOT" ] ; then
    NP_DBROOT=$NP_HOME/config
    export NP_DBROOT
fi
if [ -z "$NP_ROOT" ] ; then
    NP_ROOT=NamingService:prod
    export NP_ROOT
fi
if [ -z "$NP_MODE" ] ; then

```

```

NP_MODE=Key
export NP_MODE
fi
if [ -z "$ORBIX_NAMES" ] ; then
    ORBIX_NAMES=$NP_HOME/iona/OrbixNames1.1c
    export ORBIX_NAMES
fi
if [ -z "$ORBIX_MT" ] ; then
    ORBIX_MT=$NP_HOME/iona/OrbixMT_2.3c
    export ORBIX_MT
fi

# The following variable defines the service name offered by CORBA.

if [ -z "$NP_SERVNAME" ] ; then
    NP_SERVNAME=O_R_A_C_L_E_S_I_D
    export NP_SERVNAME
fi

# verify some values.

if [ -z "$ORACLE_HOME" -o \
    -z "$NP_HOME" -o -z "$NP_DBROOT" -o \
    -z "$ORBIX_NAMES" -o -z "$ORBIX_MT" -o \
    -z "$NP_SERVNAME" ] ; then
    echo "ERROR: Initial Net Perceptions environment variables are not set." >2
    echo "    Please edit config/shprofile and set the initial variables and
rerun script." >2
    return 1
fi

if [ ! -d "$ORACLE_HOME" ] ; then
    echo "ERROR: Directory specified by ORACLE_HOME environment variable is not
accessible." >2
    echo "    Please update config/shprofile and rerun it." >2
    return 1
fi

# Set the IONA variable

IT_CONFIG_PATH=$NP_HOME/iona
export IT_CONFIG_PATH

# Update PATH

PATH=$PATH:$NP_HOME/bin:$ORACLE_HOME/bin:$NP_HOME/jre/bin
export PATH

# Update LD_LIBRARY_PATH

LD_LIBRARY_PATH=$LD_LIBRARY_PATH:$NP_HOME/lib:$ORACLE_HOME/lib:$NP_HOME/lib/rw:$ORBIX_NAMES/lib:$ORBIX_MT/lib
export LD_LIBRARY_PATH

# Set the NP_CLASSPATH variable

NP_CLASSPATH=.:$NP_HOME/iona:$NP_HOME/java/NetPerceptionsN.jar:$NP_HOME/java/NetPerceptionsI.jar:$NP_HOME/java/OrbixWeb_3.0.4.jar:$NP_HOME/examples
export NP_CLASSPATH

```

```

#
# Set path to web browser,
# used to display online help from applications like netpmanage
#
if [ -z "$NP_BROWSER" ] ; then
    NP_BROWSER=
    export NP_BROWSER
fi
~~~TEMPLATE: \netp\shprofile_p1.sh
#!/bin/sh
#
Copyright 1998 Net Perceptions, Inc. All Rights Reserved.
#

Environment configuration file for sh based shells. Please source
this file before running any Net Perceptions for E-commerce command.
#
Net Perceptions for E-commerce configuration variables not in
this script should be set using the modify_configuration_variable
command in netpadmin. See your manual for more details.

if [-z "$ORACLE_HOME"] ; then
 ORACLE_HOME=O_R_A_C_L_E_H_O_M_E
 export ORACLE_HOME
fi
if [-z "$NP_HOME"] ; then
 NP_HOME=O_R_A_C_L_E_N_P_B_A_S_E
 export NP_HOME
fi
if [-z "$NP_DBROOT"] ; then
 NP_DBROOT=O_R_A_C_L_E_N_P_B_A_S_E/config
 export NP_DBROOT
fi
if [-z "$NP_ROOT"] ; then
 NP_ROOT=NamingService:O_R_A_C_L_E_S_I_D
 export NP_ROOT
fi
if [-z "$NP_MODE"] ; then
 NP_MODE=Key
 export NP_MODE
fi
if [-z "$ORBIX_NAMES"] ; then
 ORBIX_NAMES=O_R_A_C_L_E_N_P_B_A_S_E/iona/OrbixNames1.1c
 export ORBIX_NAMES
fi
if [-z "$ORBIX_MT"] ; then
 ORBIX_MT=O_R_A_C_L_E_N_P_B_A_S_E/iona/OrbixMT_2.3c
 export ORBIX_MT
fi

The following variable defines the service name offered by CORBA.

if [-z "$NP_SERVNAME"] ; then
 NP_SERVNAME=O_R_A_C_L_E_S_I_D
 export NP_SERVNAME
fi

verify some values.

```

```

if [-z "$ORACLE_HOME" -o \
 -z "$NP_HOME" -o -z "$NP_DBROOT" -o \
 -z "$ORBIX_NAMES" -o -z "$ORBIX_MT" -o \
 -z "$NP_SERVNAME"] ; then
 echo "ERROR: Initial Net Perceptions environment variables are not set." >2
 echo " Please edit config/shprofile and set the initial variables and rerun
script." >2
 return 1
fi

if [! -d "$ORACLE_HOME"]; then
 echo "ERROR: Directory specified by ORACLE_HOME environment variable is not
accessible." >2
 echo " Please update config/shprofile and rerun it." >2
 return 1
fi

Set the IONA variable

IT_CONFIG_PATH=$NP_HOME/iona
export IT_CONFIG_PATH

Update PATH

PATH=$PATH:$NP_HOME/bin:$ORACLE_HOME/bin:$NP_HOME/jre/bin
export PATH

Update LD_LIBRARY_PATH

LD_LIBRARY_PATH=$LD_LIBRARY_PATH:$NP_HOME/lib:$ORACLE_HOME/lib:$NP_HOME/lib/rw:$ORBIX_NAM
ES/lib:$ORBIX_MT/lib
export LD_LIBRARY_PATH

Set the NP_CLASSPATH variable

NP_CLASSPATH=.:$NP_HOME/iona:$NP_HOME/java/NetPerceptionsN.jar:$NP_HOME/java/NetPerceptio
nsI.jar:$NP_HOME/java/OrbixWeb_3.0.4.jar:$NP_HOME/examples
export NP_CLASSPATH

#
Set path to web browser,
used to display online help from applications like netpmanage
#
if [-z "$NP_BROWSER"] ; then
 NP_BROWSER=/opt/netscape/netscape
 export NP_BROWSER
fi

~~~TEMPLATE: \netp\startNETP
#!/bin/ksh
# Starts all the processes for the NetPerceptions including ORB.
# Set the netperceptions environment.
. O_R_A_C_L_E_N_P_B_A_S_E/config/shprofile
export NP_BIN=$NP_HOME/bin
echo "Starting ORB... "
$NP_BIN/orbstartup
echo "Starting ORB... Done."
echo "Starting Net Perceptions Recommendation Engine... "
$NP_BIN/netpstartup
echo "Starting Net Perceptions Recommendation Engine... Done."

```

```

$NP_BIN/chmodit O_R_A_C_L_E_S_I_D i+I_C_S
$NP_BIN/chmodit O_R_A_C_L_E_S_I_D l+I_C_S
$NP_BIN/chmodit O_R_A_C_L_E_S_I_D i+O_R_A_C_L_E_U_S_E_R
$NP_BIN/chmodit O_R_A_C_L_E_S_I_D l+O_R_A_C_L_E_U_S_E_R
$NP_BIN/chmodit O_R_A_C_L_E_S_I_D i+NS
$NP_BIN/chmodit O_R_A_C_L_E_S_I_D l+NS
$NP_BIN/chmodit O_R_A_C_L_E_S_I_D i+ALL
$NP_BIN/chmodit O_R_A_C_L_E_S_I_D l+ALL
exit 0
~~~TEMPLATE: \netp\stopNETP
#!/bin/ksh
Starts all the processes for the NetPerceptions including ORB.
Set the netperceptions environment.
. O_R_A_C_L_E_N_P_B_A_S_E/config/shprofile
export NP_BIN=$NP_HOME/bin
echo "Stopping Net Perceptions Recommendation Engine... "
$NP_BIN/netpshutdown
echo "Stopping Net Perceptions Recommendation Engine... Done."
echo "Stopping ORB... "
$NP_BIN/orbshutdown
echo "Stopping ORB... Done."
exit 0
~~~TEMPLATE: \netp\update_netp.sql
-- Filename:      update_netp.sql
-- Description:   This file performs the necessary updates to the netp schema
--               to allow netp to work properly in a cloned database.
-- Usage:        This file is called in the cloning process after the
--               proper values are substituted.
--
--

insert into D_B_U_S_E_R_N_E_T_P.T_GLROOT
  values ('O_R_A_C_L_E_N_P_B_A_S_E/config',1,'Id','4.0.50.3');

update D_B_U_S_E_R_N_E_T_P.t_gldatabase
  set rootname = 'O_R_A_C_L_E_N_P_B_A_S_E/config';

delete from D_B_U_S_E_R_N_E_T_P.T_GLROOT
  where name = 'O_L_D_O_R_A_C_L_E_N_P_B_A_S_E/config';

update D_B_U_S_E_R_N_E_T_P.T_GLDBSIG
  set src = 'O_R_A_C_L_E_S_I_D';

exit;

```

```

~DIRECTORY: templates\oracle\
~~~TEMPLATE: \oracle\configDB.ora
#
$Header: cnfg.ora 1.1 95/02/27 12:14:25 wyim Osd<unix> $ Copyr (c) 1992 Oracle
#
cnfg.ora - instance configuration parameters

control_files = (D_B_D_A_T_A_D_I_R/ctl1O_R_A_C_L_E_S_I_D.ctl,
 D_B_D_A_T_A_D_I_R/ctl2O_R_A_C_L_E_S_I_D.ctl)
Below for possible future use...
#init_sql_files = (?/dbs/sql.bsq,
?/rdbms/admin/catalog.sql,
?/rdbms/admin/expvew.sql)
background_dump_dest = O_R_A_C_L_E_B_A_S_E/admin/O_R_A_C_L_E_S_I_D/bdump
core_dump_dest = O_R_A_C_L_E_B_A_S_E/admin/O_R_A_C_L_E_S_I_D/cdump
user_dump_dest = O_R_A_C_L_E_B_A_S_E/admin/O_R_A_C_L_E_S_I_D/udump
#log_archive_dest = O_R_A_C_L_E_B_A_S_E/admin/O_R_A_C_L_E_S_I_D/arch/arch.log
db_block_size = 8192

db_name = O_R_A_C_L_E_S_I_D
~~~TEMPLATE: \oracle\crctrl.sql
CONNECT INTERNAL
SET ECHO ON
STARTUP NOMOUNT
pfile=O_R_A_C_L_E_B_A_S_E/admin/O_R_A_C_L_E_S_I_D/pfile/initO_R_A_C_L_E_S_I_D.ora
CREATE CONTROLFILE DATABASE "O_R_A_C_L_E_S_I_D" RESETLOGS NOARCHIVELOG
    SET DATABASE O_R_A_C_L_E_S_I_D
    MAXLOGFILES 32
    MAXLOGMEMBERS 2
    MAXDATAFILES 30
    MAXINSTANCES 8
    MAXLOGHISTORY 843
LOGFILE
    GROUP 1 ('D_B_D_A_T_A_D_I_R/rdo11O_R_A_C_L_E_S_I_D.dbf' ,
             'D_B_D_A_T_A_D_I_R/rdo12O_R_A_C_L_E_S_I_D.dbf') SIZE 20M,
    GROUP 2 ('D_B_D_A_T_A_D_I_R/rdo13O_R_A_C_L_E_S_I_D.dbf' ,
             'D_B_D_A_T_A_D_I_R/rdo21O_R_A_C_L_E_S_I_D.dbf') SIZE 20M,
    GROUP 3 ('D_B_D_A_T_A_D_I_R/rdo22O_R_A_C_L_E_S_I_D.dbf' ,
             'D_B_D_A_T_A_D_I_R/rdo23O_R_A_C_L_E_S_I_D.dbf') SIZE 20M
DATAFILE
    'D_B_D_A_T_A_D_I_R/ctxdO_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/ispeedO_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/np01O_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/npidx01O_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/nptmp01O_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/rbsO_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/strd01O_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/sysO_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/tmpO_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/toolsO_R_A_C_L_E_S_I_D.dbf',
    'D_B_D_A_T_A_D_I_R/vg01O_R_A_C_L_E_S_I_D.dbf'
;
# Database can now be opened normally.
ALTER DATABASE OPEN RESETLOGS;
alter user vignette identified by vignette;
SHUTDOWN NORMAL;
EXIT;

```

```

~~~TEMPLATE: \oracle\initDB.ora
#
$Header: initx.ora 12-jun-97.09:14:56 hpiao Exp $ Copyr (c) 1992 Oracle
#
include database configuration parameters
ifile =
O_R_A_C_L_E_B_A_S_E/admin/O_R_A_C_L_E_S_I_D/pfile/configO_R_A_C_L_E_S_I_D.ora
rollback_segments = (rb01,rb02,rb03,rb04)

#####
Example INIT.ORA file
#
This file is provided by Oracle Corporation to help you customize
your RDBMS installation for your site. Important system parameters
are discussed, and example settings given.
#
Some parameter settings are generic to any size installation.
For parameters that require different values in different size
installations, three scenarios have been provided: SMALL, MEDIUM
and LARGE. Any parameter that needs to be tuned according to
installation size will have three settings, each one commented
according to installation size.
#
Use the following table to approximate the SGA size needed for the
three scenarios provided in this file:
#
-----Installation/Database Size-----
SMALL MEDIUM LARGE
Block 2K 4500K 6800K 17000K
Size 4K 5500K 8800K 21000K
#
To set up a database that multiple instances will be using, place
all instance-specific parameters in one file, and then have all
of these files point to a master file using the IFILE command.
This way, when you change a public
parameter, it will automatically change on all instances. This is
necessary, since all instances must run with the same value for many
parameters. For example, if you choose to use private rollback segments,
these must be specified in different files, but since all gc_*
parameters must be the same on all instances, they should be in one file.
#
INSTRUCTIONS: Edit this file and the other INIT files it calls for
your site, either by using the values provided here or by providing
your own. Then place an IFILE= line into each instance-specific
INIT file that points at this file.
#####
tuning parameters
db_files = 80
db_file_multiblock_read_count = 8 # SMALL
db_file_multiblock_read_count = 16 # MEDIUM
db_file_multiblock_read_count = 32 # LARGE
db_block_buffers = 200 # SMALL
db_block_buffers = 550 # MEDIUM

```





```

 (ADDRESS_LIST =
 (ADDRESS= (PROTOCOL= IPC) (KEY= O_R_A_C_L_E_S_I_D))
 (ADDRESS= (PROTOCOL= TCP) (Host= h_o_s_t_n_a_m_e) (Port= T_N_S_P_O_R_T))
)
 SID_LIST_O_R_A_C_L_E_S_I_D =
 (SID_LIST =
 (SID_DESC =
 (ORACLE_HOME= O_R_A_C_L_E_H_O_M_E)
 (SID_NAME = O_R_A_C_L_E_S_I_D)
)
 (SID_DESC =
 (SID_NAME = extproc)
 (ORACLE_HOME = O_R_A_C_L_E_H_O_M_E)
 (PROGRAM = extproc)
)
)
)
)

```

```

~~~TEMPLATE: \oracle\profile
ORACLE_BASE=O_R_A_C_L_E_B_A_S_E; export ORACLE_BASE
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E; export ORACLE_HOME
ORACLE_SID=O_R_A_C_L_E_S_I_D; export ORACLE_SID
THREADS_FLAG=native; export THREADS_FLAG
ORAORB_SITE=website40; export ORAORB_SITE
LD_LIBRARY_PATH=$ORACLE_HOME/lib:/usr/dt/lib:/usr/openwin/lib:$ORACLE_HOME/jdbc/lib;
export LD_LIBRARY_PATH
ORACLE_TERM=xsun5; export ORACLE_TERM
NLS_LANG=AMERICAN_AMERICA.US7ASCII; export NLS_LANG
PATH=$ORACLE_HOME/bin:/bin:/usr/bin:/usr/ccs/bin:/usr/local/bin:/opt/bin:$PATH
TMPDIR=/tmp; export TMPDIR
CLASSPATH=$ORACLE_HOME/jdbc/lib/classes111.zip; export CLASSPATH
# Get the Netperceptions environment

#. $ORACLE_BASE/product/netp/config/shprofile
PATH=$PATH:$ORACLE_BASE/product/netp/bin

umask 022

```

```

~~~TEMPLATE: \oracle\startCTX
#!/bin/sh
Start the context server services.
LOGFILE=/tmp/ctx${ORACLE_SID}Q$.log
ctxsrv -user ctxsys/ctxsys -logfile "${LOGFILE}" -personality Q &
ctxsrv -user ctxsys/ctxsys -logfile "${LOGFILE}" -personality M &
ctxsrv -user ctxsys/ctxsys -logfile "${LOGFILE}" -personality D &
exit

```

```

~~~TEMPLATE: \oracle\startDB
#!/bin/sh
# Starts the ispeed database instance.

ORACLE_SID="O_R_A_C_L_E_S_I_D"
ORAENV_ASK="NO"
echo "Starting the \"${ORACLE_SID}\" instance.."
. oraenv

```

```

svrmgrl << EOF
connect internal
startup pfile=O_R_A_C_L_E_H_O_M_E/dbs/initO_R_A_C_L_E_S_I_D.ora
exit
EOF
if test $? -eq 0 ; then
    echo ""
    echo "Database \"${ORACLE_SID}\" warm started."
else
    echo ""
    echo "Database \"${ORACLE_SID}\" NOT started."
fi

exit

~~~TEMPLATE: \oracle\startNET
#!/bin/sh
Start the network services for ORACLE
lsnrctl start O_R_A_C_L_E_S_I_D
exit
~~~TEMPLATE: \oracle\stopCTX
#!/bin/sh
# Stop the context servers.
ctxctl <<EOF
stop all
exit
EOF
~~~TEMPLATE: \oracle\stopDB
#!/bin/sh
Stops the ispeed database instance (using immediate option).

ORACLE_SID="O_R_A_C_L_E_S_I_D"
ORAENV_ASK="NO"
echo "Shutting the \"${ORACLE_SID}\" instance.."
. oraenv
svrmgrl << EOF
connect internal
shutdown immediate
exit
EOF
if test $? -eq 0 ; then
 echo ""
 echo "Database \"${ORACLE_SID}\" shutdown comple."
else
 echo ""
 echo "Database \"${ORACLE_SID}\" shutdown FAILED."
fi

exit

~~~TEMPLATE: \oracle\stopNET
#!/bin/sh
# Stop the network services for ORACLE
lsnrctl stop O_R_A_C_L_E_S_I_D
exit
~~~TEMPLATE: \oracle\tnsnames.ora
#
Installation Generated Net8 Configuration
Version Date: Oct-27-97

```

```

Filename: Tnsnames.ora
#

extproc_connection_data =
 (DESCRIPTION =
 (ADDRESS = (PROTOCOL = IPC) (KEY = O_R_A_C_L_E_S_I_D))
 (CONNECT_DATA = (SID = extproc))
)
O_R_A_C_L_E_S_I_D =
 (DESCRIPTION =
 (ADDRESS = (PROTOCOL= TCP) (Host= h_o_s_t_n_a_m_e.d_o_m_a_i_n) (Port= T_N_S_P_O_R_T))
 (CONNECT_DATA = (SID = O_R_A_C_L_E_S_I_D))
)
O_R_A_C_L_E_S_I_D_BEQ =
 (DESCRIPTION =
 (ADDRESS = (PROTOCOL = BEQ) (PROGRAM = O_R_A_C_L_E_H_O_M_E)
 (argv0 = oracleO_R_A_C_L_E_S_I_D)
 (args = '(DESCRIPTION = (LOCAL=YES) (ADDRESS=(PROTOCOL=BEQ)))')
 (envs = 'ORACLE_HOME=${O_R_A_C_L_E_H_O_M_E},ORACLE_SID=O_R_A_C_L_E_S_I_D')
)
)

```

```

~DIRECTORY: templates\vignette\
~~~TEMPLATE: \vignette\admin
#!/bin/sh
export ORACLE_HOME RCNAME PKGINST
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E

PKGINST="-R / VGNStSrv"
RCNAME=StoryServer4

ADMIN_FILE=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/ssde
CONFIG_PATH=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B
_A_S_E01-1

echo "Copyright (c) 1996-1998 by Vignette Corporation. All Rights Reserved."
if [ $# -lt 1 ] ; then
    echo "
    Usage: $0
            (reset | start | status | stop | verify | updatepe | update_pmcfg)
    "
    exit 1
fi

# Assume it fails
RESULTS=1
if [ -f $ADMIN_FILE -a -x $ADMIN_FILE ] ; then
    # Invoke the script with the config info (-c) and the action (-a)
    $ADMIN_FILE -c $CONFIG_PATH -a $1 -L
    O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
    RESULTS=$?
fi
exit $RESULTS
~~~TEMPLATE: \vignette\delivery.tcl
set _CacheManagers(all) {}
set _CacheManagers(live) {}
set _CacheManagers(development) {}
set _CacheManagers(all) [concat $_CacheManagers(all)
"H_O_S_T_N_A_M_E.D_O_M_A_I_N:A_P_A_C_H_E_B_A_S_E06"] ;#
H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1
set _CacheManagers(development) [concat $_CacheManagers(development)
"H_O_S_T_N_A_M_E.D_O_M_A_I_N:A_P_A_C_H_E_B_A_S_E06"] ;#
H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1
~~~TEMPLATE: \vignette\pm.cfg
## INSTALLATION IDENTIFICATION
set SITE_INSTALL_HOST      H_O_S_T_N_A_M_E
set SITE_INSTALL_PATH      O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2
set SITE_INSTALL_NAME      H_O_S_T_N_A_M_E:O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2

set BIN_DIRECTORY          O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris
set SS_VERSION              4.2

## CONTENT MANAGEMENT SERVER SETTINGS
set PM_HOST                H_O_S_T_N_A_M_E.D_O_M_A_I_N
set PM_PORT                 A_P_A_C_H_E_B_A_S_E10

# Controls the behavior of Content Management Server's error logging
# Level 1 & 2 errors (major) go to syslog (/var/adm/StoryServer.*) and to the log file.
# Level 3 & 4 errors (warnings & info) go only to the log file.
set PM_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/Production/pm.log

```

```

set PM_LOG_LEVEL          2

set MAX_LOG_SIZE          500000

# This controls how big histories for projects and content
# can be. Remember, if you change this, you have to restart
# the production engine.
set MAX_HISTORY_SIZE      50

# Controls behavior of TED's error logging
# Level 1 & 2 errors go to syslog, level 3 & 4 errors go to the log file
set TED_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/Production/ted.log
set TED_LOG_LEVEL         2

# When TED spawns subprocesses to run program tasks, it waits this many secs
# between subprocess status checks
set TED_SUBPROCESS_POLL_INTERVAL 5
# TED runs program task subprocesses as this user
set TED_SUBPROCESS_USERNAME nobody
# This is where TED expects the program task executables to be; it actually
# prepends this path to argv[0] of the program task's invocation pattern
set TED_TASK_BIN_DIR
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/taskbin/solaris

# Controls behavior of VHS's error logging
# Level 1 & 2 errors go to syslog, level 3 & 4 errors go to the log file
set VHS_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/Production/vhs.log
set VHS_LOG_LEVEL        2

# Size of VHS's process pool. Must be at least two.
set VHS_POOL_SIZE        8

# VHS's prototype doctree root, where it builds, incrementally, a prototype
# static content doc tree that mirrors the target webserver(s) static content
# doc tree(s)
set VHS_PROTO_DOCROOT
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/Production/VhsProtoDocRoot

# VHS's template zip file root where the zip files and their revisions
# for Visual Templates are stored
set VHS_TEMPLATE_ZIP_DIR
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/Production/VgnTemplateZipFiles

## DATABASE SERVER SETTINGS
set TEXTSIZE              131072


set ORACLE_HOME           O_R_A_C_L_E_H_O_M_E
set ORACLE_VERSION        Oracle8
set DB_CLIENT              dbconnect
set vdbmsg(rwdblib)       librworamt.so

set SYSTEM_DB_TYPE        Oracle
set SYSTEM_DB_SERVER      O_R_A_C_L_E_S_I_D
set SYSTEM_DB_DATABASE    ""

```

```

set SYSTEM_DB_SID      O_R_A_C_L_E_S_I_D
set SYSTEM_DB_USERNAME vignette
set SYSTEM_DB_PASSWORD 2z:u8I0jM6WRHAYP
set SYSTEM_DB_PASSWORD_ENCRYPTED yes
set SYSTEM_DB_RWDBLIB   librworamt.so

set SYS_DBENV           O_R_A_C_L_E_H_O_M_E
set SYS_DBPATH          O_R_A_C_L_E_H_O_M_E
set SYS_DBSCHEXT        ora

set VHS_PORT            V_H_S_P_O_R_T

~~~TEMPLATE: \vignette\Prod_admin
#!/bin/sh
export LD_LIBRARY_PATH ORACLE_HOME PKGINST

LD_LIBRARY_PATH=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E
PKGINST="-R / VGNStSrv"
RCNAME=StoryServer3

ADMIN_FILE=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/sspm

if [$# -lt 1] ; then
 echo "
 Usage: $0 (start | status | stop)
 "
 exit 0
fi

Assume it fails
RESULTS=1
if [-f $ADMIN_FILE -a -x $ADMIN_FILE] ; then
 # Invoke the script with the config info (-c) and the action (-a)
 $ADMIN_FILE $1
 RESULTS=$?
fi
exit $RESULTS

~~~TEMPLATE: \vignette\S97StoryServer4
#!/bin/sh
export ORACLE_HOME RCNAME PKGINST
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E

PKGINST="-R / VGNStSrv"
RCNAME=StoryServer4

ADMIN_FILE=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/ssde
CONFIG_PATH=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B
_A_S_E01-1

echo "Copyright (c) 1996-1998 by Vignette Corporation. All Rights Reserved."
if [ $# -lt 1 ] ; then
    echo "
    Usage: $0
           (reset | start | status | stop | verify | updatepe | update_pmcfg)
    "
    exit 1
fi

```

```

# Assume it fails
RESULTS=1
if [ -f $ADMIN_FILE -a -x $ADMIN_FILE ] ; then
    # Invoke the script with the config info (-c) and the action (-a)
    $ADMIN_FILE -c $CONFIG_PATH -a $1 -L
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
    RESULTS=$?
fi
exit $RESULTS
---TEMPLATE: \vignette\S97StoryServer5
#!/bin/sh
export ORACLE_HOME RCNAME PKGINST
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E

PKGINST="-R / VGNStSrv"
RCNAME=StoryServer5

ADMIN_FILE=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/ssde
CONFIG_PATH=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B
_A_S_E01-1

echo "Copyright (c) 1996-1998 by Vignette Corporation. All Rights Reserved."
if [ $# -lt 1 ] ; then
    echo "
    Usage: $0
           (reset | start | status | stop | verify | updatepe | update_pmcfg)
    "
    exit 1
fi

# Assume it fails
RESULTS=1
if [ -f $ADMIN_FILE -a -x $ADMIN_FILE ] ; then
    # Invoke the script with the config info (-c) and the action (-a)
    $ADMIN_FILE -c $CONFIG_PATH -a $1 -L
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
    RESULTS=$?
fi
exit $RESULTS

---TEMPLATE: \vignette\startCASVIGN
#!/bin/sh
#Filename: startCASVIGN
#
export ORACLE_HOME RCNAME PKGINST
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E

PKGINST="-R / VGNStSrv"
RCNAME=StoryServer4

ADMIN_FILE=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/ssde
CONFIG_PATH=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B
_A_S_E01-1

# Assume it fails
RESULTS=1
echo "Starting vignette CAS..."
if [ -f $ADMIN_FILE -a -x $ADMIN_FILE ] ; then
    # Invoke the script with the config info (-c) and the action (-a)

```

```

$ADMIN_FILE -c $CONFIG_PATH -a start -L
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
RESULTS=$?
fi
echo "Starting vignette CAS... Done."
exit $RESULTS
~~~TEMPLATE: \vignette\startCMSVIGN
#!/bin/sh
#filename: startCMSVIGN

export LD_LIBRARY_PATH ORACLE_HOME PKGINST

LD_LIBRARY_PATH=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E

PKGINST="-R / VGNStSrv"
RCNAME=StoryServer1

ADMIN_FILE=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/sspm

Assume it fails
RESULTS=1
echo "Starting vignette CMS ..."
if [-f $ADMIN_FILE -a -x $ADMIN_FILE] ; then
 # Invoke the script with the config info (-c) and the action (-a)
 $ADMIN_FILE start
 RESULTS=$?
fi
echo "Starting vignette CMS ... Done."
exit $RESULTS
~~~TEMPLATE: \vignette\startVignette
#!/bin/ksh
# Filename: startVignette

O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/startCMSVIGN
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/startCASVIGN

exit
~~~TEMPLATE: \vignette\stopCASVIGN
#!/bin/sh
Filename: stopCASVIGN

export ORACLE_HOME RCNAME PKGINST
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E

PKGINST="-R / VGNStSrv"
RCNAME=StoryServer4

ADMIN_FILE=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/ssde
CONFIG_PATH=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B
_A_S_E01-1

Assume it fails
RESULTS=1
echo "Stopping vignette CAS..."
if [-f $ADMIN_FILE -a -x $ADMIN_FILE] ; then
 # Invoke the script with the config info (-c) and the action (-a)
 $ADMIN_FILE -c $CONFIG_PATH -a stop -L
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris

```



```

RESULTS=$?
fi
echo "Stopping vignette CAS... Done."
exit $RESULTS
~~~TEMPLATE: \vignette\stopCMSVIGN
#!/bin/sh
# Filename: stopCMSVIGN

export LD_LIBRARY_PATH ORACLE_HOME PKGINST

LD_LIBRARY_PATH=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/lib/solaris
ORACLE_HOME=O_R_A_C_L_E_H_O_M_E

PKGINST="-R / VGNStSrv"
RCNAME=StoryServer1

ADMIN_FILE=O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/sspm

# Assume it fails
RESULTS=1

echo "Stopping the vignette CMS ..."
if [ -f $ADMIN_FILE -a -x $ADMIN_FILE ] ; then
    # Invoke the script with the config info (-c) and the action (-a)
    $ADMIN_FILE stop
    RESULTS=$?
fi
echo "Stopping the vignette CMS ... Done."
exit $RESULTS
~~~TEMPLATE: \vignette\stopVignette
#!/bin/ksh
Filename: stopVignette

O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/stopCASVIGN
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/bin/solaris/stopCMSVIGN

exit
~~~TEMPLATE: \vignette\StoryServer.cfg
# Configuration created on Fri Jul 16 12:51:52 EDT 1999
# Filename: StoryServer.cfg

## CONFIGURATION IDENTIFICATION

set INSTALL_NAME      H_O_S_T_N_A_M_E:O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2
set CONFIG_NAME       H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1
set CONFIG_TYPE       Development

## CACHE MANAGER SETTINGS

# How to flush the document cache (valid values: RENAME or DELETE)
set CMD_ACTION        RENAME

# Cache Manager hostname
set CMD_HOST          H_O_S_T_N_A_M_E.D_O_M_A_I_N

# Cache Manager port
set CMD_PORT          A_P_A_C_H_E_B_A_S_E06

# Size of Cache Manager Thread pool. Must be at least two.

```

```

set CMD_POOL_SIZE          5

# Seconds allowed for other daemons to tell the Cache Manager what to do
set CMD_TIMEOUT            5

# The user the Cache Manager runs as (normally, matches owner of the
# docroot; must have read, write and execute permissions on the docroot to
# create directories and to rename or delete cached files)
set CMD_WHOAMI             nobody

# Controls whether the cache manager treats template paths that end in
# a legal mime type extension, as files or directories. The default is to
# treat all template paths as directories unless they end in '.html'
set CMD_MIMETYPE_EXT       0

# Controls behavior of cmd error logging
# Level 1 & 2 errors go to syslog, level 3 & 4 errors go to the log file
set CMD_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/c
md.log
set CMD_LOG_LEVEL          2

## PAGE GENERATOR SETTINGS

# Whether to allow [ ] in data posted to a template; should be disabled
# to avoid a security risk.
# no removes [ ]; yes allows them
set CTLD_ALLOW_BRACES      no

# Seconds allowed for template evaluation
set CTLD_EVAL_TIMEOUT      20

# Page Generator hostname
set CTLD_HOST              H_O_S_T_N_A_M_E.D_O_M_A_I_N

# Size of page generator process pool. Must be at least two.
set CTLD_POOL_SIZE         8

# Controls behavior of ctld error logging
# Level 1 & 2 errors go to syslog, level 3 & 4 errors go to the log file
set CTLD_INFO_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/c
tldinfo.log
set CTLD_LOG_LEVEL         2

# File used by the StoryServer Tcl LOG command.
# Because there will be multiple page generators in the slave pool,
# a process pool sequence number is automatically appended to file name.
# This sequence number has a minimum value of 1 and the maximum value is
# equal to the value of the CTLD_POOL_SIZE variable (defaults to 8) in this file.
set CTLD_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/c
tld.log

# Page Generator port
set CTLD_PORT              A_P_A_C_H_E_B_A_S_E07

# The user the Page Generator runs as; only writes in the

```

```

# H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01 directory
set CTLD_WHOAMI      nobody

# Locale specification. If set to 1, the page generator will heed the browser's
# locale setting. If set to 0 (the default), the page generator ignores the
# browser's locale and uses the locale set by CTLD_DEFAULT_LOCALE.
set CTLD_USE_LOCALE    0

# Default locale specification. Use this locale as the StoryServer's default locale
# if CTLD_USE_LOCALE is 0. If CTLD_USE_LOCALE is 1, then the web browser's specified
# language is used if it exists on the StoryServer system. If the locale does not
# exist, then use this as the default.
set CTLD_DEFAULT_LOCALE "en"

# The prefix used by the COMPONENT tcl command. This setting must match
# the ccPrefix variable in the obj.conf file (nsapi only).
set COMPONENT_PREFIX  /component

# The ServerSideFunction prefix
set SSF_PREFIX        /ServerSideFunction

## TEMPLATE MANAGER SETTINGS

# Template Manager hostname
set TMD_HOST          H_O_S_T_N_A_M_E.D_O_M_A_I_N

# Template Manager port
set TMD_PORT          A_P_A_C_H_E_B_A_S_E05

# If greater than zero, seconds between automatic refreshes of template cache.
set TMD_SLEEP         -1

# The user the Template Manager runs as; only writes in the
# H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01 directory
set TMD_WHOAMI        nobody

# Whether to make private templates available in this configuration.
# 0 keeps private templates hidden; 1 makes them available
set TMD_XRAY          1

# Controls behavior of tmd error/debug logging
# Level 1 & 2 errors go to syslog, level 3 & 4 errors go to the log file
set TMD_LOG_FILE      O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/t
md.log
set TMD_LOG_LEVEL      2

## PLACEMENT MANAGER SETTINGS

# Placement Manager hostname
set PAD_HOST          H_O_S_T_N_A_M_E.D_O_M_A_I_N

# Placement Manager port
set PAD_PORT          A_P_A_C_H_E_B_A_S_E09

# The user the Placement Manager runs as (normally, matches owner of the
# docroot; must have read, write and execute permissions on the docroot to
# create directories and to rename or delete cached files)

```

```

set PAD_WHOAMI          nobody

# Controls the behavior of pad error logging
# Level 1 & 2 errors go to syslog, level 3 & 4 errors go to the log file
set PAD_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/p
ad.log
set PAD_LOG_LEVEL          2

# PAD uses this subdir to store it's work files
set PAD_WORK_DIR
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/P
adWorkDir

# PAD uses this subdir as the archival repository
set PAD_ARCHIVE_DIR
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/P
adArchiveDir

# Size of Placement Manager's process pool. Must be at least two.
set PAD_POOL_SIZE          8

## OBSERVATION MANAGER SETTINGS

# Determines whether or not an Observation Manager (OM)
# daemon is run with this Application Server.
# 0 This Application Server does not perform StoryServer Personalization
# 1 This Application Server has an Observation Manager (OM)
# 2 This Application Server uses an Observation Manager (OM) on another Content
Application Server
set PZND_RUN_DAEMON 0

# Observation Manager (OM) hostname
set PZND_HOST              ""

# Personalization Placement Manager port
set PZND_PORT              ""

# The user the Personalization Observation Manager runs as
set PZND_WHOAMI            nobody

# Controls the behavior of PZND error logging
# Level 1 & 2 errors go to syslog, level 3 & 4 errors go to the log file
set PZND_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/p
znd.log
set PZND_LOG_LEVEL          2

# The frequency at which pznd flushes the PROFILE_MARK queue to the db (seconds)
set PZND_UPDATE_FREQ       2

# The maximum allowed size of the PROFILE_MARK queue in the plugin and pznd.
set PZN_PMARK_QUEUE_MAX    5000

# The maximum size of the pznd visitor cache
set PZND_CACHE_SIZE        5000

# The cache expiration period of visitor records in pznd (seconds). The actual time
# visitor records remain cached is between N and N times 2.

```

```

set PZND_CACHE_DURATION          300

# The column names in vgn_ur the pznd will read and serve to the httpd plugin
# for personalization purposes.
set PZND_VR_COLUMNS "userid,lname,fname,email,city,state,zip,country"

# The size of the thread pool for the Observation Manager
set PZND_THREAD_POOL_SIZE       10

## GroupLens Integration
set GL_HOST          ""
set GL_PORT          ""

## SYSTEM DATABASE SETTINGS

set STORYSERVER_PMCFG
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/Production/pm.cfg
source $STORYSERVER_PMCFG

## CONTENT DATABASE SETTINGS

set ORACLE_HOME          O_R_A_C_L_E_H_O_M_E
set DB_CLIENT            dbconnect
set vdbmsg(rwdblib)      librwora_mt.so

set CONTENT_DB_TYPE      Oracle
set CONTENT_DB_SERVER    O_R_A_C_L_E_S_I_D
set CONTENT_DB_DATABASE  ""
set CONTENT_DB_SID       O_R_A_C_L_E_S_I_D
set CONTENT_DB_USERNAME  vignette
set CONTENT_DB_PASSWORD  2oOux0GnkU1SWbbK
set vdbmsg(password_encrypted)  yes
set CONTENT_DB_RWDBLIB   librwora_mt.so

## WEB SERVER SETTINGS

set DOCROOT              O_R_A_C_L_E_V_G_N_B_A_S_E/cas-docs
set METAFILE_CACHE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-P_O_R_T_A_P_A_C_H_E-1/met
afiles
set HTTPD_CFG_FILE       httpd.conf
set HTTPD_CFG_PATH       O_R_A_C_L_E_A_P_B_A_S_E/apache_1.3.3/conf
set HTTPD_CFG_TYPE       Apache
set HTTPD_HOST           H_O_S_T_N_A_M_E.D_O_M_A_I_N
set HTTPD_PORT           P_O_R_T_A_P_A_C_H_E
set HTTPD_TYPE           Apache
set HTTPD_COMPONENTSCAN  1
# Front Door Curl Setting
#set HTTPD_FDCURL        "your frontdoor"

# Plugin log file
set HTTPD_PLUGIN_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/p
login.log

```

```

# Plugin log level.
set HTTPD_PLUGIN_LOG_LEVEL          2

# Controls whether plugin generated log files have the pid appended to the file name.
# Set to 1 for Netscape, 2 and Apache 1.2, and set to 0 for others.
set HTTPD_LOG_BY_PID      1

# PERSONALIZATION AND WEB SERVER PLUGIN SETTINGS

## Server-side function library and the list of server functions that are
## to be made available to the plugin. VGN_CSFLIB can be an additional
## library.
set VGN_SFLIB
"apache_pzn133.so,update_ucs,component_pzn,curl_pzn,personalize,pznStats,cache_delete"
set VGN_CSFLIB      ""

## The personalization function library and the list of personalization
## functions that are to be made available to the plugin. VGN_CPZNLIB
## can be an additional library.
set VGN_PZNLIB
"libPfuncs.so,maxmarks,minmarks,connectioninfo,visitorinfo,topNvisits,cookieinfo"
set VGN_CPZNLIB      ""

## Should HTTP Connection information be sent to personalization functions?
set PZN_HTTPD_SEND_CONNECTIONINFO    0

# The cache expiration period of visitor records in the httpd. The actual time
# visitor records remain cached is between N and N times 2.
set PZN_HTTPD_CACHE_DURATION        300

# Maximum size of plugin visitor record cache (# visitor records)
set PZN_HTTPD_CACHE_SIZE            5000

# Maximum number of plugin/pznd connections
set PZN_HTTPD_CONNECTION_POOL_MAX   10

# Minimum number of plugin/pznd connections
set PZN_HTTPD_CONNECTION_POOL_MIN   5

# Max seconds httpd plugin will wait for response from pznd
set PZN_HTTPD_PZND_REQUEST_TIMEOUT   10

# For apache both PZN_HTTPD_CONNECTION_POOL_MAX and PZN_HTTPD_CONNECTION_POOL_MIN
# should be set to 1.

# How often plugin will send PROFILE_MARK queue to pznd. (Seconds).
set PZN_HTTPD_UPDATE_FREQ           2

# Name of Personalization cookie, used for tracking visitors either in a cookie
# or in url stuffing.
set PZN_COOKIE_NAME                  ssuid

# Perform visitor tracking via cookie? (1/0) (1 = yes, 0 = no)
set PZN_COOKIE_TRACKING              1

# Perform automatic visitor tracking with a cookie? (1/0) Note that enabling this
# will force a visitor registry entry for every web site visitor.
set PZN_AUTO_COOKIE_TRACKING         1

```

```

# Perform visitor tracking via url stuffing? (1/0)
# Note that if you change this setting, you must flush all the cached pages in
# your docroot that contain CURL or COMPONENT in order for the change to take effect.
set PZN_URL_TRACKING 0

# Perform automatic visitor tracking with url stuffing? (1/0) Note that enabling this
# will force a visitor registry entry for every web site visitor.
set PZN_AUTO_URL_TRACKING 0

# Personalization Cookie Path. This path is used in the Set-Cookie header
# when visitor id cookies (PZN_COOKIE_NAME) are set (if
# PZN_AUTO_COOKIE_TRACKING is enabled). This path is also used to
# determine when to set the cookie, i.e. if the url being requested
# matches PZN_COOKIE_PATH.
set PZN_COOKIE_PATH "/"

# Personalization Variable Information. Change this variable to change the default
# settings
# for the cookies used in Personalization.
set PZN_COOKIE_VARS " expires=Saturday, 06-Sep-2014 23:50:08 GMT"

# URL Tracking Exclusion. This is a "|" delimited list to exclude particular paths
# from using URL Tracking for Personalization.
set PZN_URL_TRACKING_EXCLUDE "/vgn/"

# The Profile Marker Log file. Profile marker information can be
# recorded in pmark.log. The Date, Time, VisitorId, URI, Category, and
# Keyword of every page view containing Profile Markers can be
# recorded.
#
# The following *PMARK* variables govern the ways in which information
# can be recorded. A facility is provided so that logs can be
# automatically accumulated by month. Each month a new pmark.log file
# will be created named pmark.log.nn where nn represents the month.
# Alternatively the traditional StoryServer MAX_LOG_SIZE rollover to
# .bak mechanism is also provided. Due to the potential size of this
# file(s), this logging is turned off by default,
# i.e., PZN_PMARK_LOG_MAX is set to 0. To enable Profile Marker
# logging, set PZN_PMARK_LOG_MAX to either -1 for unlimited size (in
# which case you should use the SUFFIX mechanism) or some reasonable
# maximum size.

# The file to record Profile Marker information.
# This file name is also affected by HTTPD_LOG_BY_PID. If HTTPD_LOG_BY_PID is set
# to 1, the process id is appended to this filename.
set PZN_PMARK_LOG_FILE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/p
mark.log

# strftime(3C) format to append to PZN_PMARK_LOG_FILE file name. Suffix of ".%m"
# will append the current month to the name of the log file, aggregating stats by
# month. When the evaluation of the SUFFIX changes, a new file is created.
# Over a period of months you end up with pmark.log.01, pmark.log.02 etc.
# %m month, %Y year, %d day in month
set PZN_PMARK_LOG_FILE_SUFFIX ".%m"

# Max size of log file. 0 disables writing to this log. -1 for unlimited size.
set PZN_PMARK_LOG_MAX 0

```

```

# Field separator. Fields in pmark.log are separated by this string.
set PZN_PMARK_LOG_FSEP " "

# The time will be recorded in pmark.log using this strftime(3C) time format.
# %H hour, %M minute
set PZN_PMARK_LOG_TFMT "%H%M"

# The date will be recorded in pmark.log using this strftime(3C) date format.
# %m month, %Y year, %d day in month
set PZN_PMARK_LOG_DFMT "%Y%m%d"

# The fields to be written to the log. Use the 1st letter of each of the
# following field names to record those fields in pmark.log. A setting
# of "DTVUCK" will record the Date, Time, VisitorId, URI, Category, and
# Keyword in pmark.log.
set PZN_PMARK_LOG_FIELDS "DTVUCK"

# These variables control whether template performance measurement is
# enabled. By default, template performance measurement is enabled.
# To disable, set VGN_TMTENABLE to 'false'. To limit the size of the
# template performance measurement cache use the variable VGN_TMTSIZE.
# The maximum number of templates that will remain in the cache is 1000
# and the default value for VGN_TMTSIZE is 100. The variable VGN_TMTPATH
# must be set and match the path prefix for your performance reports.
# When a template with a path prefix matching VGN_TMTPATH is executed, a
# variable name _PerfData is created that holds execution statistics for
# all of the templates that have executed since the last reset. See the
# templates that are delivered in /vgn/performance/TMT/ for a description
# of the data that is maintained.

#set VGN_TMTENABLE false
set VGN_TMTSIZE 100
set VGN_TMTPATH /vgn/performance/TMT

set UPG_UPGRADE_STATE R42
## COMMUNICATION SETTINGS FOR StoryServer - Do not modify

set CMDS { { H_O_S_T_N_A_M_E.D_O_M_A_I_N_A_P_A_C_H_E_B_A_S_E06 } }
set DB_DOWN_FILE O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/dbdown
set RWDBLIB librwor_mt.so
set TEMPLATE_CACHE
O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/H_O_S_T_N_A_M_E-A_P_A_C_H_E_B_A_S_E01-1/t
emplates

## Include external Tcl files or DLOAD other API modules here

if {[info exists _Process] && $_Process == "ctld" } {
    source O_R_A_C_L_E_V_G_N_B_A_S_E/StoryServer/R4.2/conf/delivery.tcl
    DLOAD libBOBTclClient.so InitBobClient
}

set ONLINE_DOCS
"http://H_O_S_T_N_A_M_E.D_O_M_A_I_N:A_P_A_C_H_E_B_A_S_E01/StoryServer/docs/index.html"

```



```

~DIRECTORY: templates\web\
~~~TEMPLATE: \web\adapter.app
[ADAPTER.Services]
Redirect=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/ndwrd.so,ndwrdgi_global_init
Ior=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/wrior.so,wriorGlobalInit
Dispatcher=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/libwrl.so,wrDynamicInit
Logger=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/libndwzo.so,ndwzs_DynamicInit
;
[ADAPTER.Spyglass]
Services=Ior,Redirect,Dispatcher,Logger
;
[ADAPTER.Netscape]
Services=Ior,Dispatcher,Logger
;
[ADAPTER.Apache]
Services=Dispatcher,Logger

~~~TEMPLATE: \web\owl.cfg

#

(
ListenerName=admin
(
PortNumber=O_A_S_B_A_S_E18
(
HostName=H_O_S_T_N_A_M_E
)
(
HostAddress=ANY
)
(
PROXY=OFF
)
(
ServerRoot=O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/admin/
)
)

#

(
ListenerName=www
(
PortNumber=O_A_S_B_A_S_E11
(
HostName=H_O_S_T_N_A_M_E
)
(
HostAddress=ANY
)
(
PROXY=OFF
)
)
(

```

```
ServerRoot=O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_
E/www/
)
)
```

```
#
```

```
(
ListenerName=mstage
(
PortNumber=O_A_S_B_A_S_E20
(
HostName=H_O_S_T_N_A_M_E.us.oracle.com
)
(
HostAddress=ANY
)
(
PROXY=OFF
)
)
(
ServerRoot=O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_
E/mstage/
)
)
```

```
#
```

```
(
ListenerName=cstage
(
PortNumber=O_A_S_B_A_S_E21
(
HostName=H_O_S_T_N_A_M_E.D_O_M_A_I_N
)
(
HostAddress=ANY
)
(
PROXY=OFF
)
)
(
ServerRoot=O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_
E/cstage/
)
)
```

```
#
```

```
(
ListenerName=ots
```

```

(
PortNumber=O_A_S_B_A_S_E23
(
HostName=H_O_S_T_N_A_M_E.D_O_M_A_I_N
)
(
HostAddress=ANY
)
(
PROXY=OFF
)
(
ServerRoot=O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_
E/ots/
)
)
#

(
ListenerName=cdeply
(
PortNumber=O_A_S_B_A_S_E22
(
HostName=H_O_S_T_N_A_M_E.D_O_M_A_I_N
)
(
HostAddress=ANY
)
(
PROXY=OFF
)
(
ServerRoot=O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_
E/cdeply/
)
)

~~~TEMPLATE: \web\resources.ora
ys.msgFilePath=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/mesg/
ys.dlpath=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/lib/
orb.bootport=O_A_S_O_R_B_B_A_S_E49
orb.boothost=H_O_S_T_N_A_M_E
orb.sec.w-location=file:O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/wmt
orb.sec.w-passwd=B+XlK2Z2LqVoFFglv6OqAtWs5ATxEuQA0KkstwoDzIIBwJUK1AtWMBIE
zyg.g0ip=225.231.55.74
zyg.g0port=62749
orb.spy.export-metrics=true
owsctl.spy.export-metrics=false
oasadmin.spy.export-metrics=false
ys.msgFilePath=O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/mesg/
oasctl.forceinit=true
~~~TEMPLATE: \web\site.app
;
[root]
Components          = wrb,dispatchers,cartx,orb,ots
DisplayName          = "O_A_S_S_I_T_E_N_A_M_E Site"
InternalName         = O_A_S_S_I_T_E_N_A_M_E

```

```

ConfigURL          = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=SITE
OpenGIF            = site.gif
CloseGIF           = site.gif
NodesList          = H_O_S_T_N_A_M_E
StartOrder         = orb, wrb, dispatchers, cartx
;
[O_A_S_S_I_T_E_N_A_M_E.H_O_S_T_N_A_M_E]
NodeManagerPort    = O_A_S_N_O_D_E
NodeType           = Primary
InstallationType    = List, Wrb, Cartx
UserName           = admin
Password           = JPPMDBLOKGHDOJMC
DomainName         = D_O_M_A_I_N
;
[O_A_S_S_I_T_E_N_A_M_E.ots]
TreeLocation       = O_A_S_S_I_T_E_N_A_M_E.wrb
JavaClass          = oracle.ots.mgmt.OtsTree
;
[O_A_S_S_I_T_E_N_A_M_E.orb]
Processes          = orbproc
;
[O_A_S_S_I_T_E_N_A_M_E.orb.orbproc]
StartCmd           = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasctl.cgi
start ALL
StopCmd            = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasctl.cgi stop
ALL
MonitorCmd         = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasctl.cgi
monitor ALL
ReloadCmd          = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasctl.cgi
reload ALL
;
[O_A_S_S_I_T_E_N_A_M_E.wrb]
Components         = logging, security, dad, frecovery, orb
DisplayName        = "Oracle Application Server"
InternalName       = wrb
Processes          =
wrbcfg, wrblog, wrbroker, wrbahsrv, wrbasrv, wrbrmpxy, wrksf, wrbmon, otsfacsrv
CollapseProcesses = oassrv, wrksf, otsfacsrv
ConfigURL          = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=WRB&NAME=wrb
OpenGIF            = oas.gif
CloseGIF           = oas.gif
ReloadOrder        =
wrb/wrblog, wrb/wrbahsrv, wrb/wrbasrv, wrb/wrksf, wrb/cartxSrv, wrb/wrbroker, wrb/wrbrmpxy, wrb/
wrbmon, wrb/otsfacsrv, dispatchers
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging]
Components         = system, attribute, xlf
DisplayName        = "Logging"
ConfigURL          = /ows-abin/lgadmin?FORM_CODE=LOGGER_MAIN
OpenGIF            = folder_open.gif
CloseGIF           = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.system]
DisplayName        = "System"
ConfigURL          = /ows-abin/lgadmin?FORM_CODE=LOGGER_SYS
OpenGIF            = propsheet.gif
CloseGIF           = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.attribute]

```

```

DisplayName      = "Attribute"
ConfigURL        = /ows-abin/lgadmin?FORM_CODE=LOGGER_ATTR
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.xlf]
DisplayName      = "XLF"
ConfigURL        = /ows-abin/lgadmin?FORM_CODE=LOGGER_XLF
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security]
Components       = basic,digest,ip,domain,database,encrypt,certificate
DisplayName      = "Security"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_CONFIG_FORM
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.basic]
DisplayName      = "Basic"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_BASIC_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.digest]
DisplayName      = "Digest"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_DIGEST_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.ip]
DisplayName      = "IP"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_IP_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.domain]
DisplayName      = "Domain"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_DOMAIN_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.database]
DisplayName      = "Basic_Oracle"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_BASIC_ORACLE_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.encrypt]
DisplayName      = "Crypt"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_CRYPT_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate]
Components       = realms, servers, acls
DisplayName      = "Certificate"
ConfigURL        = /ows-adoc/blank.html
OpenGIF          = folder_open.gif

```

```

CloseGIF          = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.realms]
DisplayName       = "Realms"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=CERT_REALM_MAIN
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.servers]
DisplayName       = "Servers"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=CERT_SERVER_MAIN
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.acls]
DisplayName       = "ACLs"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=CERT_ACL_MAIN
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.orb]
DisplayName       = "ORB Configuration"
ConfigURL        = /ows-abin/orbmgr?file=gencfg
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.oassrv]
DisplayName       = "Oracle Application Server"
ComponentType     = Wrb
InternalName      = oassrv
Nodes             = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.oassrv.H_O_S_T_N_A_M_E]
Instances         = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.otsfacsrv]
DisplayName       = "Transaction Server Factory"
ComponentType     = Wrb
InternalName      = otsfacsrv
Nodes             = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.otsfacsrv.H_O_S_T_N_A_M_E]
Instances         = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmon]
DisplayName       = "Monitoring Daemon"
ComponentType     = Wrb
InternalName      = wrbmon
Nodes             = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmon.H_O_S_T_N_A_M_E]
Instances         = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrblog]
DisplayName       = "Log Server"
ComponentType     = Wrb
InternalName      = wrblog
Nodes             = H_O_S_T_N_A_M_E
;

```

```

[O_A_S_S_I_T_E_N_A_M_E.wrb.wrblog.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrksf]
DisplayName         = "Cartridge Server Factory"
ComponentType       = Wrb
InternalName        = wrksf
Nodes               = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrksf.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbroker]
DisplayName         = "Resource Manager"
ComponentType       = Wrb
InternalName        = wrbroker
Nodes               = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbroker.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmpxy]
DisplayName         = "Resource Manager Proxy"
ComponentType       = Wrb
InternalName        = wrbmpxy
Nodes               = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmpxy.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbcfg]
DisplayName         = "Configuration Provider"
ComponentType       = Wrb
InternalName        = wrbcfg
Nodes               = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbcfg.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbasrv]
DisplayName         = "Authentication Server"
ComponentType       = Wrb
InternalName        = wrbasrv
Nodes               = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbasrv.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbahsrv]
DisplayName         = "Authentication Host Server"
ComponentType       = Wrb
InternalName        = wrbahsrv
Nodes               = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbahsrv.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers]
Components          = dispproc

```

```

DisplayName      = "HTTP Listeners"
InternalName     = dispatchers
ConfigURL        = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=LIST&NAME=dispatchers
OpenGIF          = listener_node_open.gif
CloseGIF         = listener_node_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc]
Components       = Net,Srv,UsrGrp,Dir,Lang,Mime,Enc,CaRoot,Sec
ComponentType    = Disp
ConfigURL        = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=LIST&NAME=dispatchers/
OpenGIF          = listener.gif
CloseGIF         = listener.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Net]
DisplayName      = "Network"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=NETWORK&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Srv]
DisplayName      = "Server"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=SERVER&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.UsrGrp]
DisplayName      = "User/Group"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=UG&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Dir]
DisplayName      = "Directory"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=DIR&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Lang]
DisplayName      = "Language"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=LANG&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Mime]
DisplayName      = "MIME"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=MIME&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Enc]
DisplayName      = "Encoding"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=ENCODING&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.CaRoot]
DisplayName      = "SSL CA Roots"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=SSLCA&orig_name=
OpenGIF          = propsheet.gif

```



```

CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec]
Components        = Basic,Digest,IP,Domain,SSL
DisplayName        = "Security"
ConfigURL          = /ows-abin/wladmin?CONFIG_CODE=SECURITY&orig_name=
OpenGIF           = folder_open.gif
CloseGIF          = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Basic]
DisplayName        = "Basic"
ConfigURL          = /ows-abin/wladmin?CONFIG_CODE=BASIC&orig_name=
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Digest]
DisplayName        = "Digest"
ConfigURL          = /ows-abin/wladmin?CONFIG_CODE=DIGEST&orig_name=
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.IP]
DisplayName        = "IP"
ConfigURL          = /ows-abin/wladmin?CONFIG_CODE=IP&orig_name=
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Domain]
DisplayName        = "Domain"
ConfigURL          = /ows-abin/wladmin?CONFIG_CODE=DOMAIN&orig_name=
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.SSL]
DisplayName        = "SSL"
ConfigURL          = /ows-abin/wladmin?CONFIG_CODE=SSL&orig_name=
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.dad]
DisplayName        = "DB Access Descriptor"
ConfigURL          = /ows-abin/dadadmin
OpenGIF           = dad_node_closed.gif
CloseGIF          = dad_node_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.frecovery]
DisplayName        = "Failure Recovery"
ConfigURL          = /ows-abin/csadmin?FORM_CODE=FAILURE_RECOVERY
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx]
DisplayName        = "Applications"
InternalName       = wrb/cartxSrv
ConfigURL          = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP
OpenGIF           = app_node_open.gif
CloseGIF          = app_node_closed.gif
Components        = owsapps,DB_Uutilities, mstage, cstage, mdeploy, ots, cdeploy
;

```

```

[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps]
ConfigURL      = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=owsapps
OpenGIF        = app.gif
CloseGIF       = app.gif
Components     = AppConfig, AppCartx
InternalName   = owsapps
ComponentType  = App
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppConf]
DisplayName    = "Configuration"
ConfigURL      = /ows-abin/csadmin?FORM_CODE=DISPLAY_CONFIG&ServerName=owsapps
OpenGIF        = folder_open.gif
CloseGIF       = folder_closed.gif
Components     = AppConfigSrv, AppConfigLog, AppConfigWeb, AppConfigTxProperty,
AppConfWebTransactions
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppConf.AppConfSrv]
DisplayName    = "Server"
ConfigURL      = /ows-abin/csadmin?FORM_CODE=SERVER_CONFIG&ServerName=owsapps
OpenGIF        = propsheet.gif
CloseGIF       = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppConf.AppConfLog]
DisplayName    = "Logging"
ConfigURL      = /ows-abin/csadmin?FORM_CODE=LOG_CONFIG&ServerName=owsapps
OpenGIF        = propsheet.gif
CloseGIF       = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppConf.AppConfWeb]
DisplayName    = "Web Parameters"
ConfigURL      = /ows-abin/csadmin?FORM_CODE=WEB_CONFIG&ServerName=owsapps
OpenGIF        = propsheet.gif
CloseGIF       = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppConf.AppConfTxProperty]
DisplayName    = "Tx Property"
ConfigURL      = /ows-abin/csadmin?FORM_CODE=TXN_PROP&ServerName=owsapps
OpenGIF        = propsheet.gif
CloseGIF       = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppConf.AppConfWebTransactions]
DisplayName    = "Transactions"
ConfigURL      = /ows-abin/csadmin?FORM_CODE=TXN_MAIN&ServerName=owsapps
OpenGIF        = txn_folder_open.gif
CloseGIF       = txn_folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppCartx]
DisplayName    = "Cartridges"
ConfigURL      =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=owsapps&NAME=owsapps
OpenGIF        = cart_node_open.gif
CloseGIF       = cart_node_closed.gif
Components     = owsstat
InternalName   = cartx/owsapps
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppCartx.owsstat]
ConfigURL      =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=owsapps&NAME=owsapps/owsstat
OpenGIF        = cart.gif

```

```

CloseGIF          = cart.gif
Components        = AppCartxConf
InternalName      = owsapps/owsstat
ComponentType     = Cartx
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppCartx.owsstat.AppCartxConf]
DisplayName       = "Configuration"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=CART_CONFIG&CartridgeName=owsapps/owsstat
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
Components       = AppCartxConfTuning, AppCartxConfVP, AppCartxConfCartlib,
AppCartxConfParam
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppCartx.owsstat.AppCartxConf.AppCartxConfTuning]
DisplayName       = "Tuning"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=LOAD_CONFIG&CartridgeName=owsapps/owsstat
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppCartx.owsstat.AppCartxConf.AppCartxConfVP]
DisplayName       = "Virtual Path"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=VPATH&CartridgeName=owsapps/owsstat
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppCartx.owsstat.AppCartxConf.AppCartxConfCartlib]
DisplayName       = "CWEB Parameters"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=CWEB_SO_CONFIG&CartridgeName=owsapps/owsstat
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.owsapps.AppCartx.owsstat.AppCartxConf.AppCartxConfParam]
DisplayName       = "Cartridge Parameters"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=ENV_CONFIG&CartridgeName=owsapps/owsstat
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities]
ConfigURL        = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=DB_Uutilities
OpenGIF          = app.gif
CloseGIF         = app.gif
Components       = AppConf, AppCartx
InternalName     = DB_Uutilities
ComponentType    = App
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppConf]
DisplayName       = "Configuration"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=DISPLAY_CONFIG&ServerName=DB_Uutilities
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
Components       = AppConfSrv, AppConfLog, AppConfWeb, AppConfTxProperty,
AppConfWebTransactions
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppConf.AppConfSrv]
DisplayName       = "Server"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=SERVER_CONFIG&ServerName=DB_Uutilities

```

```

OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppConf.AppConfLog]
DisplayName      = "Logging"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=LOG_CONFIG&ServerName=DB_Uutilities
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppConf.AppConfWeb]
DisplayName      = "Web Parameters"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=WEB_CONFIG&ServerName=DB_Uutilities
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppConf.AppConfTxProperty]
DisplayName      = "Tx Property"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=TXN_PROP&ServerName=DB_Uutilities
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppConf.AppConfWebTransactions]
DisplayName      = "Transactions"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=TXN_MAIN&ServerName=DB_Uutilities
OpenGIF         = txn_folder_open.gif
CloseGIF        = txn_folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx]
DisplayName      = "Cartridges"
ConfigURL       =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=DB_Uutilities&NAME=DB_Uutilities
OpenGIF         = cart_node_open.gif
CloseGIF        = cart_node_closed.gif
Components      = DB_Browser, Log_Analyzer
InternalName     = cartx/DB_Uutilities
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.DB_Browser]
ConfigURL       =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=DB_Uutilities&NAME=DB_Uutilities/
DB_Browser
OpenGIF         = cart.gif
CloseGIF        = cart.gif
Components      = AppCartxConf
InternalName     = DB_Uutilities/DB_Browser
ComponentType    = Cartx
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.DB_Browser.AppCartxConf]
DisplayName      = "Configuration"
ConfigURL       =
/ows-abin/csadmin?FORM_CODE=CART_CONFIG&CartridgeName=DB_Uutilities/DB_Browser
OpenGIF         = folder_open.gif
CloseGIF        = folder_closed.gif
Components      = AppCartxConfTuning, AppCartxConfPlsql, AppCartxConfVP
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.DB_Browser.AppCartxConf.AppCartxConfTu
ning]
DisplayName      = "Tuning"
ConfigURL       =
/ows-abin/csadmin?FORM_CODE=LOAD_CONFIG&CartridgeName=DB_Uutilities/DB_Browser

```

```

OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.DB_Browser.AppCartxConf.AppCartxConfPl
sql]
DisplayName      = "PLSQL Parameters"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=AGENT_CONFIG&AgentName=DB_Uutilities/DB_Browser
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.DB_Browser.AppCartxConf.AppCartxConfVP
]
DisplayName      = "Virtual Path"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=VPATH&CartridgeName=DB_Uutilities/DB_Browser
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.Log_Analyzer]
ConfigURL        =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=DB_Uutilities&NAME=DB_Uutilities/
Log_Analyzer
OpenGIF          = cart.gif
CloseGIF         = cart.gif
Components       = AppCartxConf
InternalName     = DB_Uutilities/Log_Analyzer
ComponentType    = Cartx
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.Log_Analyzer.AppCartxConf]
DisplayName      = "Configuration"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=CART_CONFIG&CartridgeName=DB_Uutilities/Log_Analyzer
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
Components       = AppCartxConfTuning, AppCartxConfPlsql, AppCartxConfVP
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.Log_Analyzer.AppCartxConf.AppCartxConf
Tuning]
DisplayName      = "Tuning"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=LOAD_CONFIG&CartridgeName=DB_Uutilities/Log_Analyzer
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.Log_Analyzer.AppCartxConf.AppCartxConf
Plsql]
DisplayName      = "PLSQL Parameters"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=AGENT_CONFIG&AgentName=DB_Uutilities/Log_Analyzer
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.DB_Uutilities.AppCartx.Log_Analyzer.AppCartxConf.AppCartxConf
VP]
DisplayName      = "Virtual Path"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=VPATH&CartridgeName=DB_Uutilities/Log_Analyzer
OpenGIF          = propsheet.gif

```

```

CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy]
ConfigURL         = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=cdeploy
OpenGIF           = app.gif
CloseGIF          = app.gif
Components        = AppConfig, AppCartx
InternalName      = cdeploy
ComponentType     = App
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppConf]
DisplayName       = "Configuration"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=DISPLAY_CONFIG&ServerName=cdeploy
OpenGIF           = folder_open.gif
CloseGIF          = folder_closed.gif
Components        = AppConfigSrv, AppConfigEnv, AppConfigLog, AppConfigJava, AppConfigWeb,
AppConfTxProperty
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppConf.AppConfSrv]
DisplayName       = "Server"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=SERVER_CONFIG&ServerName=cdeploy
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppConf.AppConfEnv]
DisplayName       = "Environment Variables"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=ENV_CONFIG&ServerName=cdeploy
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppConf.AppConfLog]
DisplayName       = "Logging"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=LOG_CONFIG&ServerName=cdeploy
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppConf.AppConfJava]
DisplayName       = "Java Environment"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=JAVA_PARAM_CONFIG&ServerName=cdeploy
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppConf.AppConfWeb]
DisplayName       = "Web Parameters"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=WEB_CONFIG&ServerName=cdeploy
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppConf.AppConfTxProperty]
DisplayName       = "Tx Property"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=TXN_PROP&ServerName=cdeploy
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppCartx]
DisplayName       = "Cartridges"
ConfigURL         =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=cdeploy&NAME=cdeploy
OpenGIF           = cart_node_open.gif

```

```

CloseGIF          = cart_node_closed.gif
InternalName      = cartx/cdeploy
Components        = cdeploy
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage]
ConfigURL         = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=mstage
OpenGIF           = app.gif
CloseGIF          = app.gif
Components        = AppConfig, AppCartx
InternalName      = mstage
ComponentType     = App
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppConf]
DisplayName       = "Configuration"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=DISPLAY_CONFIG&ServerName=mstage
OpenGIF           = folder_open.gif
CloseGIF          = folder_closed.gif
Components        = AppConfigSrv, AppConfigEnv, AppConfigLog, AppConfigJava, AppConfigWeb,
AppConfTxProperty
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppConf.AppConfSrv]
DisplayName       = "Server"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=SERVER_CONFIG&ServerName=mstage
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppConf.AppConfEnv]
DisplayName       = "Environment Variables"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=ENV_CONFIG&ServerName=mstage
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppConf.AppConfLog]
DisplayName       = "Logging"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=LOG_CONFIG&ServerName=mstage
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppConf.AppConfJava]
DisplayName       = "Java Environment"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=JAVA_PARAM_CONFIG&ServerName=mstage
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppConf.AppConfWeb]
DisplayName       = "Web Parameters"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=WEB_CONFIG&ServerName=mstage
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppConf.AppConfTxProperty]
DisplayName       = "Tx Property"
ConfigURL         = /ows-abin/csadmin?FORM_CODE=TXN_PROP&ServerName=mstage
OpenGIF           = propsheet.gif
CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppCartx]
DisplayName       = "Cartridges"
ConfigURL         =

```

```

/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=mstage&NAME=mstage
OpenGIF      = cart_node_open.gif
CloseGIF     = cart_node_closed.gif
InternalName  = cartx/mstage
Components   = mstage
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppCartx.mstage]
ConfigURL    = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=mstage
OpenGIF      = app.gif
CloseGIF     = app.gif
Components   = AppCartxConf
InternalName  = mstage/mstage
ComponentType = Cartx
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppCartx.mstage.AppCartxConf]
DisplayName   = "Configuration"
ConfigURL    = /ows-abin/csadmin?FORM_CODE=CART_CONFIG&CartridgeName=mstage/mstage
OpenGIF      = folder_open.gif
CloseGIF     = folder_closed.gif
Components   = AppCartxConfTuning, AppCartxConfVP, AppCartxConfJWeb
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppCartx.mstage.AppCartxConf.AppCartxConfTuning]
DisplayName   = "Tuning"
ConfigURL    = /ows-abin/csadmin?FORM_CODE=LOAD_CONFIG&CartridgeName=mstage/mstage
OpenGIF      = propsheet.gif
CloseGIF     = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppCartx.mstage.AppCartxConf.AppCartxConfVP]
DisplayName   = "Virtual Path"
ConfigURL    = /ows-abin/csadmin?FORM_CODE=VPATH&CartridgeName=mstage/mstage
OpenGIF      = propsheet.gif
CloseGIF     = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mstage.AppCartx.mstage.AppCartxConf.AppCartxConfJWeb]
DisplayName   = "JWeb Parameters"
ConfigURL    =
/ows-abin/csadmin?FORM_CODE=JWEB_PAR_CONF&CartridgeName=mstage/mstage
OpenGIF      = propsheet.gif
CloseGIF     = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage]
ConfigURL    = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=cstage
OpenGIF      = app.gif
CloseGIF     = app.gif
Components   = AppConf, AppCartx
InternalName  = cstage
ComponentType = App
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppConf]
DisplayName   = "Configuration"
ConfigURL    = /ows-abin/csadmin?FORM_CODE=DISPLAY_CONFIG&ServerName=cstage
OpenGIF      = folder_open.gif
CloseGIF     = folder_closed.gif
Components   = AppConfSrv, AppConfEnv, AppConfLog, AppConfJava, AppConfWeb,
AppConfTxProperty
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppConf.AppConfSrv]
DisplayName   = "Server"
ConfigURL    = /ows-abin/csadmin?FORM_CODE=SERVER_CONFIG&ServerName=cstage

```



```

OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppConf.AppConfEnv]
DisplayName      = "Environment Variables"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=ENV_CONFIG&ServerName=cstage
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppConf.AppConfLog]
DisplayName      = "Logging"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=LOG_CONFIG&ServerName=cstage
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppConf.AppConfJava]
DisplayName      = "Java Environment"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=JAVA_PARAM_CONFIG&ServerName=cstage
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppConf.AppConfWeb]
DisplayName      = "Web Parameters"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=WEB_CONFIG&ServerName=cstage
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppConf.AppConfTxProperty]
DisplayName      = "Tx Property"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=TXN_PROP&ServerName=cstage
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppCartx]
DisplayName      = "Cartridges"
ConfigURL       =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=cstage&NAME=cstage
OpenGIF         = cart_node_open.gif
CloseGIF        = cart_node_closed.gif
InternalName    = cartx/cstage
Components      = cstage
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppCartx.cstage]
ConfigURL       = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=cstage
OpenGIF         = app.gif
CloseGIF        = app.gif
Components      = AppCartxConf
InternalName    = cstage/cstage
ComponentType   = Cartx
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppCartx.cstage.AppCartxConf]
DisplayName      = "Configuration"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=CART_CONFIG&CartridgeName=cstage/cstage
OpenGIF         = folder_open.gif
CloseGIF        = folder_closed.gif
Components      = AppCartxConfTuning, AppCartxConfVP, AppCartxConfJWeb
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cstage.AppCartx.cstage.AppCartxConf.AppCartxConfTuning]
DisplayName      = "Tuning"

```



```

ConfigURL          = /ows-abin/csadmin?FORM_CODE=WEB_CONFIG&ServerName=mdeploy
OpenGIF            = propsheet.gif
CloseGIF           = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mdeploy.AppConf.AppConfTxProperty]
DisplayName        = "Tx Property"
ConfigURL          = /ows-abin/csadmin?FORM_CODE=TXN_PROP&ServerName=mdeploy
OpenGIF            = propsheet.gif
CloseGIF           = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mdeploy.AppCartx]
DisplayName        = "Cartridges"
ConfigURL          =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=mdeploy&NAME=mdeploy
OpenGIF            = cart_node_open.gif
CloseGIF           = cart_node_closed.gif
InternalName       = cartx/mdeploy
Components         = mdeploy
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mdeploy.AppCartx.mdeploy]
ConfigURL          = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=mdeploy
OpenGIF            = app.gif
CloseGIF           = app.gif
Components         = AppCartxConf
InternalName       = mdeploy/mdeploy
ComponentType      = Cartx
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mdeploy.AppCartx.mdeploy.AppCartxConf]
DisplayName        = "Configuration"
ConfigURL          =
/ows-abin/csadmin?FORM_CODE=CART_CONFIG&CartridgeName=mdeploy/mdeploy
OpenGIF            = folder_open.gif
CloseGIF           = folder_closed.gif
Components         = AppCartxConfTuning, AppCartxConfVP, AppCartxConfJWeb
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mdeploy.AppCartx.mdeploy.AppCartxConf.AppCartxConfTuning]
DisplayName        = "Tuning"
ConfigURL          =
/ows-abin/csadmin?FORM_CODE=LOAD_CONFIG&CartridgeName=mdeploy/mdeploy
OpenGIF            = propsheet.gif
CloseGIF           = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mdeploy.AppCartx.mdeploy.AppCartxConf.AppCartxConfVP]
DisplayName        = "Virtual Path"
ConfigURL          = /ows-abin/csadmin?FORM_CODE=VPATH&CartridgeName=mdeploy/mdeploy
OpenGIF            = propsheet.gif
CloseGIF           = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.mdeploy.AppCartx.mdeploy.AppCartxConf.AppCartxConfJWeb]
DisplayName        = "JWeb Parameters"
ConfigURL          =
/ows-abin/csadmin?FORM_CODE=JWEB_PAR_CONF&CartridgeName=mdeploy/mdeploy
OpenGIF            = propsheet.gif
CloseGIF           = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots]
ConfigURL          = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=ots
OpenGIF            = app.gif
CloseGIF           = app.gif

```

```

Components      = AppConf, AppCartx
InternalName    = ots
ComponentType   = App
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppConf]
DisplayName     = "Configuration"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=DISPLAY_CONFIG&ServerName=ots
OpenGIF         = folder_open.gif
CloseGIF        = folder_closed.gif
Components      = AppConfSrv, AppConfEnv, AppConfLog, AppConfJava, AppConfWeb,
AppConfTxProperty
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppConf.AppConfSrv]
DisplayName     = "Server"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=SERVER_CONFIG&ServerName=ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppConf.AppConfEnv]
DisplayName     = "Environment Variables"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=ENV_CONFIG&ServerName=ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppConf.AppConfLog]
DisplayName     = "Logging"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=LOG_CONFIG&ServerName=ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppConf.AppConfJava]
DisplayName     = "Java Environment"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=JAVA_PARAM_CONFIG&ServerName=ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppConf.AppConfWeb]
DisplayName     = "Web Parameters"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=WEB_CONFIG&ServerName=ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppConf.AppConfTxProperty]
DisplayName     = "Tx Property"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=TXN_PROP&ServerName=ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppCartx]
DisplayName     = "Cartridges"
ConfigURL       =
/ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=CARTX&APPNAME=ots&NAME=ots
OpenGIF         = cart_node_open.gif
CloseGIF        = cart_node_closed.gif
InternalName    = cartx/ots
Components      = ots
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppCartx.ots]
ConfigURL       = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=ots

```

```

OpenGIF          = app.gif
CloseGIF         = app.gif
Components       = AppCartxConf
InternalName     = ots/ots
ComponentType    = Cartx
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppCartx.ots.AppCartxConf]
DisplayName      = "Configuration"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=CART_CONFIG&CartridgeName=ots/ots
OpenGIF         = folder_open.gif
CloseGIF        = folder_closed.gif
Components      = AppCartxConfTuning, AppCartxConfVP, AppCartxConfJWeb
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppCartx.ots.AppCartxConf.AppCartxConfTuning]
DisplayName      = "Tuning"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=LOAD_CONFIG&CartridgeName=ots/ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppCartx.ots.AppCartxConf.AppCartxConfVP]
DisplayName      = "Virtual Path"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=VPATH&CartridgeName=ots/ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.ots.AppCartx.ots.AppCartxConf.AppCartxConfJWeb]
DisplayName      = "JWeb Parameters"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=JWEB_PAR_CONF&CartridgeName=ots/ots
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppCartx.cdeploy]
ConfigURL       = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP&NAME=cdeploy
OpenGIF         = app.gif
CloseGIF        = app.gif
Components      = AppCartxConf
InternalName    = cdeploy/cdeploy
ComponentType   = Cartx
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppCartx.cdeploy.AppCartxConf]
DisplayName      = "Configuration"
ConfigURL       =
/ows-abin/csadmin?FORM_CODE=CART_CONFIG&CartridgeName=cdeploy/cdeploy
OpenGIF         = folder_open.gif
CloseGIF        = folder_closed.gif
Components      = AppCartxConfTuning, AppCartxConfVP, AppCartxConfJWeb
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppCartx.cdeploy.AppCartxConf.AppCartxConfTuning]
DisplayName      = "Tuning"
ConfigURL       =
/ows-abin/csadmin?FORM_CODE=LOAD_CONFIG&CartridgeName=cdeploy/cdeploy
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppCartx.cdeploy.AppCartxConf.AppCartxConfVP]
DisplayName      = "Virtual Path"
ConfigURL       = /ows-abin/csadmin?FORM_CODE=VPATH&CartridgeName=cdeploy/cdeploy
OpenGIF         = propsheet.gif
CloseGIF        = propsheet.gif

```

```

;
[O_A_S_S_I_T_E_N_A_M_E.cartx.cdeploy.AppCartx.cdeploy.AppCartxConf.AppCartxConfJWeb]
DisplayName      = "JWeb Parameters"
ConfigURL        =
/ows-abin/csadmin?FORM_CODE=JWEB_PAR_CONF&CartridgeName=cdeploy/cdeploy
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
~~~TEMPLATE: \web\site_e.app
;
[root]
Components = wrb,dispatchers,cartx,orb,ots
DisplayName = "O_A_S_S_I_T_E_N_A_M_E Site"
InternalName = O_A_S_S_I_T_E_N_A_M_E
ConfigURL = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=SITE
OpenGIF = site.gif
CloseGIF = site.gif
NodesList = H_O_S_T_N_A_M_E
StartOrder = orb,wrb,dispatchers,cartx
;
[O_A_S_S_I_T_E_N_A_M_E.H_O_S_T_N_A_M_E]
NodeManagerPort = O_A_S_N_O_D_E
NodeType = Primary
InstallationType = List,Wrb,Cartx
UserName = admin
Password = JPPMDBLOKGHDOJMC
DomainName = D_O_M_A_I_N
;
[O_A_S_S_I_T_E_N_A_M_E.ots]
TreeLocation = O_A_S_S_I_T_E_N_A_M_E.wrb
JavaClass = oracle.ots.mgmt.OtsTree
;
[O_A_S_S_I_T_E_N_A_M_E.orb]
;TreeLocation = O_A_S_S_I_T_E_N_A_M_E.wrb
;JavaClass = oracle.orb.mgmt.OrbTree
Processes = orbproc
;
[O_A_S_S_I_T_E_N_A_M_E.orb.orbproc]
StartCmd = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasoctl.cgi
start ALL
StopCmd = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasoctl.cgi stop
ALL
MonitorCmd = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasoctl.cgi
monitor ALL
ReloadCmd = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasoctl.cgi
reload ALL
;
[O_A_S_S_I_T_E_N_A_M_E.wrb]
Components = logging,security,dad,frecovery,orb
DisplayName = "Oracle Application Server"
InternalName = wrb
Processes =
wrbcfg,wrblog,wrbroker,wrbahsrv,wrbasrv,wrbmpxy,wrksf,wrbmon,otsfacsrv
CollapseProcesses = oassrv,wrksf,otsfacsrv
ConfigURL = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=WRB&NAME=wrb
OpenGIF = oas.gif
CloseGIF = oas.gif
ReloadOrder =
wrb/wrblog,wrb/wrbahsrv,wrb/wrbasrv,wrb/wrksf,wrb/cartxSrv,wrb/wrbroker,wrb/wrbmpxy,wrb/
wrbmon,wrb/otsfacsrv,dispatchers

```

```

;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging]
Components = system,attribute,xlf
DisplayName = "Logging"
ConfigURL = /ows-abin/lgadmin?FORM_CODE=LOGGER_MAIN
OpenGIF = folder_open.gif
CloseGIF = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.system]
DisplayName = "System"
ConfigURL = /ows-abin/lgadmin?FORM_CODE=LOGGER_SYS
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.attribute]
DisplayName = "Attribute"
ConfigURL = /ows-abin/lgadmin?FORM_CODE=LOGGER_ATTR
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.xlf]
DisplayName = "XLF"
ConfigURL = /ows-abin/lgadmin?FORM_CODE=LOGGER_XLF
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security]
Components = basic,digest,ip,domain,database,crypt,certificate
DisplayName = "Security"
ConfigURL = /ows-abin/atadmin?FORM_CODE=AUTH_CONFIG_FORM
OpenGIF = folder_open.gif
CloseGIF = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.basic]
DisplayName = "Basic"
ConfigURL = /ows-abin/atadmin?FORM_CODE=AUTH_BASIC_FORM
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.digest]
DisplayName = "Digest"
ConfigURL = /ows-abin/atadmin?FORM_CODE=AUTH_DIGEST_FORM
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.ip]
DisplayName = "IP"
ConfigURL = /ows-abin/atadmin?FORM_CODE=AUTH_IP_FORM
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.domain]
DisplayName = "Domain"
ConfigURL = /ows-abin/atadmin?FORM_CODE=AUTH_DOMAIN_FORM
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.database]
DisplayName = "Basic_Oracle"

```

```

ConfigURL = /ows-abin/atadmin?FORM_CODE=AUTH_BASIC_ORACLE_FORM
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.crypt]
DisplayName = "Crypt"
ConfigURL = /ows-abin/atadmin?FORM_CODE=AUTH_CRYPT_FORM
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate]
Components = realms, servers, acs
DisplayName = "Certificate"
ConfigURL = /ows-adoc/blank.html
OpenGIF = folder_open.gif
CloseGIF = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.realms]
DisplayName = "Realms"
ConfigURL = /ows-abin/csadmin?FORM_CODE=CERT_REALM_MAIN
OpenGIF = folder_open.gif
CloseGIF = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.servers]
DisplayName = "Servers"
ConfigURL = /ows-abin/csadmin?FORM_CODE=CERT_SERVER_MAIN
OpenGIF = folder_open.gif
CloseGIF = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.acs]
DisplayName = "ACLs"
ConfigURL = /ows-abin/csadmin?FORM_CODE=CERT_ACL_MAIN
OpenGIF = folder_open.gif
CloseGIF = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.orb]
DisplayName = "ORB Configuration"
ConfigURL = /ows-abin/orbmgr?file=gencfg
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.oassrv]
DisplayName = "Oracle Application Server"
ComponentType = Wrb
InternalName = oassrv
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.oassrv.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.otsfacsrv]
DisplayName = "Transaction Server Factory"
ComponentType = Wrb
InternalName = otsfacsrv
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.otsfacsrv.H_O_S_T_N_A_M_E]
Instances = 1
;

```



```

[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmon]
DisplayName = "Monitoring Daemon"
ComponentType = Wrb
InternalName = wrbmon
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmon.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrblog]
DisplayName = "Log Server"
ComponentType = Wrb
InternalName = wrblog
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrblog.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrksf]
DisplayName = "Cartridge Server Factory"
ComponentType = Wrb
InternalName = wrksf
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrksf.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbroker]
DisplayName = "Resource Manager"
ComponentType = Wrb
InternalName = wrbroker
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbroker.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbrmpxy]
DisplayName = "Resource Manager Proxy"
ComponentType = Wrb
InternalName = wrbrmpxy
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbrmpxy.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbcfg]
DisplayName = "Configuration Provider"
ComponentType = Wrb
InternalName = wrbcfg
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbcfg.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbasrv]
DisplayName = "Authentication Server"
ComponentType = Wrb
InternalName = wrbasrv
Nodes = H_O_S_T_N_A_M_E

```

```

;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbasrv.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbahsrv]
DisplayName = "Authentication Host Server"
ComponentType = Wrb
InternalName = wrbahsrv
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbahsrv.H_O_S_T_N_A_M_E]
Instances = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbvpm]
DisplayName = "Virtual Path Manager"
ComponentType = Wrb
InternalName = wrbvpm
Nodes = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbvpm.H_O_S_T_N_A_M_E]
Instances = 1
;

[O_A_S_S_I_T_E_N_A_M_E.dispatchers]
Components = dispproc
DisplayName = "HTTP Listeners"
InternalName = dispatchers
ConfigURL = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=LIST&NAME=dispatchers
OpenGIF = listener_node_open.gif
CloseGIF = listener_node_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc]
Components = Net,Srv,UsrGrp,Dir,Lang,Mime,Enc,CaRoot,Sec
ComponentType = Disp
ConfigURL = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=LIST&NAME=dispatchers/
OpenGIF = listener.gif
CloseGIF = listener.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Net]
DisplayName = "Network"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=NETWORK&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Srv]
DisplayName = "Server"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=SERVER&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.UsrGrp]
DisplayName = "User/Group"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=UG&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Dir]
DisplayName = "Directory"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=DIR&orig_name=

```

```

OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Lang]
DisplayName = "Language"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=LANG&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Mime]
DisplayName = "MIME"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=MIME&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Enc]
DisplayName = "Encoding"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=ENCODING&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.CaRoot]
DisplayName = "SSL CA Roots"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=SSLCA&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec]
Components = Basic,Digest,IP,Domain,SSL
DisplayName = "Security"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=SECURITY&orig_name=
OpenGIF = folder_open.gif
CloseGIF = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Basic]
DisplayName = "Basic"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=BASIC&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Digest]
DisplayName = "Digest"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=DIGEST&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.IP]
DisplayName = "IP"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=IP&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Domain]
DisplayName = "Domain"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=DOMAIN&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.SSL]

```

```

DisplayName = "SSL"
ConfigURL = /ows-abin/wladmin?CONFIG_CODE=SSL&orig_name=
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.dad]
DisplayName = "DB Access Descriptor"
ConfigURL = /ows-abin/dadadmin
OpenGIF = dad_node_closed.gif
CloseGIF = dad_node_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.frecovery]
DisplayName = "Failure Recovery"
ConfigURL = /ows-abin/csadmin?FORM_CODE=FAILURE_RECOVERY
OpenGIF = propsheet.gif
CloseGIF = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx]
DisplayName = "Applications"
InternalName = wrb/cartxSrv
ConfigURL = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP
OpenGIF = app_node_open.gif
CloseGIF = app_node_closed.gif
;
~~~TEMPLATE: \web\site_s.app
;
[root]
Components            = wrb,dispatchers,cartx,orb,ots
DisplayName            = "O_A_S_S_I_T_E_N_A_M_E Site"
InternalName          = O_A_S_S_I_T_E_N_A_M_E
ConfigURL             = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=SITE
OpenGIF               = site.gif
CloseGIF              = site.gif
NodesList             = H_O_S_T_N_A_M_E
StartOrder            = orb,wrb,dispatchers,cartx
;
[O_A_S_S_I_T_E_N_A_M_E.H_O_S_T_N_A_M_E]
NodeManagerPort       = O_A_S_N_O_D_E
NodeType              = Primary
InstallationType      = List,Wrb,Cartx
UserName              = admin
Password              = JPPMDBLOKGHDOJMC
DomainName            = D_O_M_A_I_N
;
[O_A_S_S_I_T_E_N_A_M_E.ots]
TreeLocation          = O_A_S_S_I_T_E_N_A_M_E.wrb
JavaClass             = oracle.ots.mgmt.OtsTree
;
[O_A_S_S_I_T_E_N_A_M_E.orb]
;TreeLocation         = O_A_S_S_I_T_E_N_A_M_E.wrb
;JavaClass            = oracle.orb.mgmt.OrbTree
Processes            = orbproc
;
[O_A_S_S_I_T_E_N_A_M_E.orb.orbproc]
StartCmd              = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasoct1.cgi
start ALL
StopCmd               = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasoct1.cgi stop
ALL
MonitorCmd            = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasoct1.cgi

```

```

monitor ALL
ReloadCmd          = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/oasctl.cgi
reload ALL
;
[O_A_S_S_I_T_E_N_A_M_E.wrb]
Components          = logging,security,dad,frecovery,orb
DisplayName         = "Oracle Application Server"
InternalName        = wrb
Processes           = wrbcfg,wrblog,wrbroker,wrbahsrv,wrbasrv,wrbmpxy,wksf,wrbmon
CollapseProcesses  = oassrv,wksf
ConfigURL           = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=WRB&NAME=wrb
OpenGIF             = oas.gif
CloseGIF            = oas.gif
ReloadOrder         =
wrb/wrblog,wrb/wrbahsrv,wrb/wrbasrv,wrb/wksf,wrb/cartxSrv,wrb/wrbroker,wrb/wrbmpxy,wrb/
wrbmon,dispatchers
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging]
Components          = system,attribute,xlf
DisplayName         = "Logging"
ConfigURL           = /ows-abin/lgadmin?FORM_CODE=LOGGER_MAIN
OpenGIF             = folder_open.gif
CloseGIF            = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.system]
DisplayName         = "System"
ConfigURL           = /ows-abin/lgadmin?FORM_CODE=LOGGER_SYS
OpenGIF             = propsheet.gif
CloseGIF            = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.attribute]
DisplayName         = "Attribute"
ConfigURL           = /ows-abin/lgadmin?FORM_CODE=LOGGER_ATTR
OpenGIF             = propsheet.gif
CloseGIF            = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.logging.xlf]
DisplayName         = "XLF"
ConfigURL           = /ows-abin/lgadmin?FORM_CODE=LOGGER_XLF
OpenGIF             = propsheet.gif
CloseGIF            = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security]
Components          = basic,digest,ip,domain,database,crypt,certificate
DisplayName         = "Security"
ConfigURL           = /ows-abin/atadmin?FORM_CODE=AUTH_CONFIG_FORM
OpenGIF             = folder_open.gif
CloseGIF            = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.basic]
DisplayName         = "Basic"
ConfigURL           = /ows-abin/atadmin?FORM_CODE=AUTH_BASIC_FORM
OpenGIF             = propsheet.gif
CloseGIF            = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.digest]
DisplayName         = "Digest"
ConfigURL           = /ows-abin/atadmin?FORM_CODE=AUTH_DIGEST_FORM
OpenGIF             = propsheet.gif

```

```

CloseGIF          = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.ip]
DisplayName       = "IP"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_IP_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.domain]
DisplayName       = "Domain"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_DOMAIN_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.database]
DisplayName       = "Basic_Oracle"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_BASIC_ORACLE_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.crypt]
DisplayName       = "Crypt"
ConfigURL        = /ows-abin/atadmin?FORM_CODE=AUTH_CRYPT_FORM
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate]
Components       = realms, servers, acls
DisplayName       = "Certificate"
ConfigURL        = /ows-adoc/blank.html
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.realms]
DisplayName       = "Realms"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=CERT_REALM_MAIN
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.servers]
DisplayName       = "Servers"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=CERT_SERVER_MAIN
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.security.certificate.acls]
DisplayName       = "ACLs"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=CERT_ACL_MAIN
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.orb]
DisplayName       = "ORB Configuration"
ConfigURL        = /ows-abin/orbmgr?file=gencfg
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.oassrv]
DisplayName       = "Oracle Application Server"

```

```

ComponentType      = Wrb
InternalName       = oassrv
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.oassrv.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.otsfacsrv]
DisplayName        = "Transaction Server Factory"
ComponentType      = Wrb
InternalName       = otsfacsrv
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.otsfacsrv.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmon]
DisplayName        = "Monitoring Daemon"
ComponentType      = Wrb
InternalName       = wrbmon
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmon.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrblog]
DisplayName        = "Log Server"
ComponentType      = Wrb
InternalName       = wrblog
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrblog.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrksf]
DisplayName        = "Cartridge Server Factory"
ComponentType      = Wrb
InternalName       = wrksf
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrksf.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbroker]
DisplayName        = "Resource Manager"
ComponentType      = Wrb
InternalName       = wrbroker
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbroker.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmpxy]
DisplayName        = "Resource Manager Proxy"
ComponentType      = Wrb
InternalName       = wrbrmpxy
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbmpxy.H_O_S_T_N_A_M_E]

```

```

Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbcfg]
DisplayName        = "Configuration Provider"
ComponentType      = Wrb
InternalName       = wrbcfg
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbcfg.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbasrv]
DisplayName        = "Authentication Server"
ComponentType      = Wrb
InternalName       = wrbasrv
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbasrv.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbahsrv]
DisplayName        = "Authentication Host Server"
ComponentType      = Wrb
InternalName       = wrbahsrv
Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbahsrv.H_O_S_T_N_A_M_E]
Instances          = 1
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbvpm]
;DisplayName        = "Virtual Path Manager"
;ComponentType      = Wrb
;InternalName       = wrbvpm
;Nodes              = H_O_S_T_N_A_M_E
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.wrbvpm.H_O_S_T_N_A_M_E]
;Instances          = 1
;

[O_A_S_S_I_T_E_N_A_M_E.dispatchers]
Components         = dispproc
DisplayName        = "HTTP Listeners"
InternalName       = dispatchers
ConfigURL          = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=LIST&NAME=dispatchers
OpenGIF            = listener_node_open.gif
CloseGIF           = listener_node_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc]
Components         = Net,Srv,UsrGrp,Dir,Lang,Mime,Enc,CaRoot,Sec
ComponentType      = Disp
ConfigURL          = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=LIST&NAME=dispatchers/
OpenGIF            = listener.gif
CloseGIF           = listener.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Net]
DisplayName        = "Network"
ConfigURL          = /ows-abin/wladmin?CONFIG_CODE=NETWORK&orig_name=
OpenGIF            = propsheet.gif
CloseGIF           = propsheet.gif

```



```

;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Srv]
DisplayName      = "Server"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=SERVER&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.usrGrp]
DisplayName      = "User/Group"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=UG&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Dir]
DisplayName      = "Directory"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=DIR&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Lang]
DisplayName      = "Language"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=LANG&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Mime]
DisplayName      = "MIME"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=MIME&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Enc]
DisplayName      = "Encoding"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=ENCODING&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.CaRoot]
DisplayName      = "SSL CA Roots"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=SSLCA&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec]
Components       = Basic,Digest,IP,Domain,SSL
DisplayName      = "Security"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=SECURITY&orig_name=
OpenGIF          = folder_open.gif
CloseGIF         = folder_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Basic]
DisplayName      = "Basic"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=BASIC&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Digest]
DisplayName      = "Digest"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=DIGEST&orig_name=

```

```

OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.IP]
DisplayName      = "IP"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=IP&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.Domain]
DisplayName      = "Domain"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=DOMAIN&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.dispatchers.dispproc.Sec.SSL]
DisplayName      = "SSL"
ConfigURL        = /ows-abin/wladmin?CONFIG_CODE=SSL&orig_name=
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.dad]
DisplayName      = "DB Access Descriptor"
ConfigURL        = /ows-abin/dadadmin
OpenGIF          = dad_node_closed.gif
CloseGIF         = dad_node_closed.gif
;
[O_A_S_S_I_T_E_N_A_M_E.wrb.frecovery]
DisplayName      = "Failure Recovery"
ConfigURL        = /ows-abin/csadmin?FORM_CODE=FAILURE_RECOVERY
OpenGIF          = propsheet.gif
CloseGIF         = propsheet.gif
;
[O_A_S_S_I_T_E_N_A_M_E.cartx]
DisplayName      = "Applications"
InternalName     = wrb/cartxSrv
ConfigURL        = /ows-abin/oasadmin?FORM_CODE=MAIN&COMPONENT=APP
OpenGIF          = app_node_open.gif
CloseGIF         = app_node_closed.gif
;
---TEMPLATE: \web\svadmin.cfg
[MultiPort]
ANY O_A_S_B_A_S_E14 NORM H_O_S_T_N_A_M_E.D_O_M_A_I_N /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/admin/
NONE
ANY O_A_S_B_A_S_E14 NORM H_O_S_T_N_A_M_E /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/admin/
NONE
[NetInfo]
MaxConnectCount = 500
;DNSResolution = NEVER
DNSResolution = ALWAYS
ServerPID =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/admin/sva
dmin.pid
;
;
; Log Information
;

```

```

; Set values for ...
;   LogInfoFile   ... Information (Audit) Log file
;   AdminFile     ... Error Log File
;   TimeStyle     ... Time Style
;
[LogParams]
AdminRollover      = never
TimeStyle         = LOCAL
AdminFile         =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/admin/sva
dmin.err
;
; Uncomment the ConnectionLogs section if logging is to be done
; Specify the correct filename in place of 'FILENAME'
;
[ConnectionLogs]
;FILENAME CLF {clf}
;
; Server Parameters
;
; Set values for ...
;   RequestTimeout    ... Time out for incoming requests
;   ResponseTimeout   ... Time out for outgoing responses
;   ScriptTimeout     ... Time out for Script response time
;
[Server]
InitialFile       = adminIndex.html
DefaultMIMEType   = application/octet-stream
; UserDir         = public_html
; UserDirInitialFile = myinitial.html
DefaultCharset    = iso-8859-1
PreferredLanguage = en
ImageMap          = map
UseDirIndexing    = FALSE
CGITimeout        = 900
FileCaching       = ON
;
; Secure Information Parameters
;
; Set values for ...
;   UserID          ... Acquire privileges for User ID
;   GroupID         ... Acquire privileges for Group ID
;
[SecureInfo]
UserID           = I_C_S
GroupID          = G_R_O_U_P_N_A_M_E
;
;
; Directory Mappings
;
; List each mapping from a physical directory to a
; virtual directory, including the indicator whether
; the directory contains scripts or whether the
; subdirectories should be mapped recursively (R) or
; non-recursively (N).
;
[DirMaps]
; This first line which has ?/ows/4.0/doc needs to be here to keep
; the virtual path ordering correct.

```

```

O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/doc/      NR      /
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/             NR      /ows-doc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/doc/ NR    /ows-adoc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/cgi/        CR      /ows-abin/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/classes/     NR      /ows-aclass/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin/              CR      /ows-bin/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/img/        NR      /ows-img/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/img/        NR      /ows-aimg/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/              NR      /
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/             NR      /demo/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/bin/         CR      /demo/bin/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/res/         NR      /demo/img/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/             NR      /demo/src/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/img/         NR      /tr-img/

;
; Language Extensions
;
; List for each combination of language type
; and character set one or more unique
; extensions.
;
[LangExt]
en          iso-8859-1          eng
en          unicode-1-1         engU uc
fr-CA       iso-8859-1          frc
fr-FR       iso-8859-1          fr
jp-JP       iso-2022-jp         jp
jp-JP       unicode-1-1-utf-8   jpU
;
;
; MIME Types
;
; List for each combination of MIME Type
; and representation one or more unique
; extensions.
;
[MIMETypes]
application/octet-stream      bin
application/astound           asd asn
application/fastman           lcc
application/java-archive      jar
application/java-serialized-object ser
application/java-vm           class
application/mac-binhex40      hqx
application/x-stuffit         sit
application/mbedlet           mbd
application/msword            doc
application/oda               oda
application/pdf               pdf
application/postscript         ai eps ps
application/rtf               rtf
application/studiom           smp
application/timbuktu          tbt
application/vnd.ms-excel      xls xlw xla xlc xlm xlt
application/vnd.ms-powerpoint ppt pps pot
application/vnd.ms-project    mpp
application/winhelp           hlp
application/x-javascript      js

```

```

application/x-javascript;charset=UTF-8 jsu
application/x-asap asp
application/x-csh csh
application/x-dot dot
application/x-dvi dvi
application/x-earthtime etc
application/x-envoy evy
application/x-excel xls xlc xll xlm xlw
application/x-gtar gtar
application/x-cpio cpio
application/x-hdf hdf
application/x-latex latex
application/x-javascript-config jsc
application/x-maker fm
application/x-mif mif mi
application/x-mocha mocha moc
application/x-msaccess mdb
application/x-mscardfile crd
application/x-msclip clp
application/x-msmediaview m13 m14
application/x-msmetafile wmf
application/x-msmoney mny
application/x-mspublisher pub
application/x-msschedule scd
application/x-msterial trm
application/x-mswrite wri
application/x-NET-Install ins
application/x-netcdf nc cdf
application/x-ns-proxy-autoconfig proxy
application/x-pointplus css
application/x-salsa slc
application/x-sh sh
application/x-shar shar
application/x-sprite spr sprite
application/x-tar tar
application/x-tcl tcl
application/x-perl pl
application/x-tex tex
application/x-texinfo texinfo texi
application/x-timbuktu tbp
application/x-tkined tki tkined
application/x-troff-man man
application/x-troff-me me
application/x-troff-ms ms
application/x-troff t tr roff
application/x-wais-source src
application/zip zip
application/pre-encrypted enc
application/x-pkcs7-crl crl
application/x-fortezza-ckl ckl
audio/basic au snd
audio/echospeech es esl
audio/midi midi mid
audio/x-aiff aif aiff aifc
audio/x-wav wav
audio/x-pn-realaudio ra ram
audio/x-pac pac
audio/x-epac pae
audio/x-liveaudio lam

```

```

drawing/x-dwf          dwf
image/fif              fif
image/gif              gif
image/ief              ief
image/ifs              ifs
image/jpeg             jpeg jpg jpe jfif pjpeg pjp
image/png              png
image/tiff             tiff tif
image/vnd              dwg svf
image/wavelet          wi
image/bmp              bmp
image/x-photo-cd       pcd
image/x-cmu-raster     ras
image/x-portable-anymap pnm
image/x-portable-bitmap pbm
image/x-portable-graymap pgm
image/x-portable-pixmap ppm
image/x-rgb            rgb
image/x-xbitmap        xbm
image/x-xpixmap        xpm
image/x-xwindowdump    xwd
text/html              htm html
text/plain             txt c lst java
text/richtext          rtx
text/tab-separated-values tsv
text/x-setext          etx
text/x-speech          talk
video/isisvideo        fvi
video/mpeg             mpeg mpg mpe mpv vbs mpegv
video/x-mpeg2          mpv2 mp2v
video/msvideo          avi
video/quicktime        qt mov moov
video/vivo             viv vivo
video/wavelet          wv
video/x-sgi-movie      movie
x-world/x-svr          svr
x-world/x-vrml         wrl
x-world/x-vrt          vrt
appl/text              doc
model/vrml             wrl vrml
x-conference/x-cooltalk ice
x-gzip                 gz
x-compress             z
x-uencode              uu uue
application/x-x509-ca-cert cacert
application/x-x509-server-cert scert
application/x-x509-user-cert ucert
application/x-x509-email-cert ecert
;
[Encodings]
compress              Z
gzip                  gz
;
[Security]
;SSL {
;CertFile = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/osskeys/cert.der
;DistNameFile = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/osskeys/servname.der
;KeyFile = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/osskeys/privkey.der
;CADir = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/ca

```

```

;CRLDir = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/cacrls
;}
Basic {
(Users)
admin: JPPMDBLOKGHDOJMC
(Groups)
dba: admin
(Realms)
Admin Utility Server: dba
}
;
;
[Protection]
/ R Basic(Admin Utility Server)
/ows-adoc/ R Basic(Admin Utility Server)
/ows-abin/ R Basic(Admin Utility Server)
/ows-bin/ R Basic(Admin Utility Server)
/ows-doc/ R Basic(Admin Utility Server)
;/demo/ R Basic(Admin Utility Server)
;/demo/bin/ R Basic(Admin Utility Server)
;/demo/src/ R Basic(Admin Utility Server)
;
[DynApps]
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/ndwfss.so oracle_adp_init
~~~TEMPLATE: \web\svcdeploy.cfg
;; Oracle Internet Commerce listener information file
;; Copyright (C) 1997 Oracle Corporation. All rights reserved.

[MultiPort]
ANY O_A_S_B_A_S_E22 NORM H_O_S_T_N_A_M_E.D_O_M_A_I_N /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/cdeploy/
NONE
;
[NetInfo]
MaxConnectCount = 338
DNSResolution = NEVER
ServerPID =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/cdeploy/svcdep
ly.pid
;
;
; Log Information
;
; Set values for ...
; LogDir ... Place for all log files
; LogInfoFile ... Information (Audit) Log file
; LogErrorFile ... Error Log File
;
[LogParams]
AdminRollover = never
TimeStyle = GMT
AdminFile =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/cdeploy/svcdep
ly.err
;
;
; Server Parameters
;
; Set values for ...

```

```

; RequestTimeout ... Time out for incoming requests
; ResponseTimeout ... Time out for outgoing responses
; ScriptTimeout ... Time out for Script response time
;
[Server]
InitialFile = cdeploy.en.htm
DefaultMIMEType = text/html
; UserDir = public_html
; UserDirInitialFile = myinitial.html
DefaultCharset = iso-8859-1
PreferredLanguage = en
ImageMap = map
UseDirIndexing = FALSE
CGITimeout = 900
;
; Secure Information Parameters
;
; Set values for ...
; UserID ... Acquire privileges for User ID
; GroupID ... Acquire privileges for Group ID
;
[SecureInfo]
UserID = I_C_S
GroupID = G_R_O_U_P_N_A_M_E
;
;
; Directory Mappings
;
; List each mapping from a physical directory to a
; virtual directory, including the indicator whether
; the directory contains scripts or whether the
; subdirectories should be mapped recursively (R) or
; non-recursively (N).
;
[DirMaps]
; This first line which has ?/ows/doc needs to be here to keep
; the virtual path ordering correct.
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/deploy/store/templates/ NR /

;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin/ CN /ows-bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /ows-doc/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admdoc/ NR /ows-adoc/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/img/ NR /ows-img/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/sample/ NR /sample/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/sample/bin/ CR /sample/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/ NR /demo/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/bin/ CR /demo/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/res/ NR /demo/img/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/ NR /demo/src/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/img/ NR /tr-img/

;
;
; File Cache
;
; List the full virtual filename path or wild-card
; expression denoting one or more files in the ServerEs
; virtual file system.
;

```



```

;[FileCache]
;/products/*
;/products/xr25/Version*.c
;/employees/list/phones
;
;
; Language Extensions
;
; List for each combination of language type
; and character set one or more unique
; extensions.
;
[LangExt]
en iso-8859-1 eng
en unicode-1-1 engU uc
fr-CA iso-8859-1 frc
fr-FR iso-8859-1 fr
jp-JP iso-2022-jp jp
jp-JP unicode-1-1-utf-8 jpU
;
;
; MIME Types
;
; List for each combination of MIME Type
; and representation one or more unique
; extensions.
;
[MIMETypes]
text/html htm html
image/jpeg jpg jpeg
image/gif gif
appl/text doc
text/plain txt ksh lst
application/pdf pdf
application/postscript ps
x-world/x-vrml wrl vrml
;
;
[Encodings]
compress Z
gzip gz
;
;
;The ordering of the DynApps should not be changed
[DynApps]
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/ndwfss.so oracle_adp_init
---TEMPLATE: \web\svcstage.cfg
;; Oracle Internet Commerce listener information file
;; Copyright (C) 1997 Oracle Corporation. All rights reserved.

[MultiPort]
ANY O_A_S_B_A_S_E21 NORM H_O_S_T_N_A_M_E.D_O_M_A_I_N /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/cstage/
NONE
;
[NetInfo]
MaxConnectCount = 338
DNSResolution = NEVER

```

```

ServerPID =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/svcstage.pid
;
;
; Log Information
;
; Set values for ...
; LogDir ... Place for all log files
; LogInfoFile ... Information (Audit) Log file
; LogErrorFile ... Error Log File
;
[LogParams]
AdminRollover = never
TimeStyle = GMT
AdminFile =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/svcstage.err
;
;
; Server Parameters
;
; Set values for ...
; RequestTimeout ... Time out for incoming requests
; ResponseTimeout ... Time out for outgoing responses
; ScriptTimeout ... Time out for Script response time
;
[Server]
InitialFile = cstage.en.htm
DefaultMIMEType = text/html
; UserDir = public_html
; UserDirInitialFile = myinitial.html
DefaultCharset = iso-8859-1
PreferredLanguage = en
ImageMap = map
UseDirIndexing = FALSE
CGITimeout = 900
;
; Secure Information Parameters
;
; Set values for ...
; UserID ... Acquire privileges for User ID
; GroupID ... Acquire privileges for Group ID
;
[SecureInfo]
UserID = I_C_S
GroupID = G_R_O_U_P_N_A_M_E
;
;
; Directory Mappings
;
; List each mapping from a physical directory to a
; virtual directory, including the indicator whether
; the directory contains scripts or whether the
; subdirectories should be mapped recursively (R) or
; non-recursively (N).
;
[DirMaps]
; This first line which has ?/ows/doc needs to be here to keep
; the virtual path ordering correct.
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/stage/store/templates/ NR /

```

```

;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin/ CN /ows-bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /ows-doc/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admdoc/ NR /ows-adoc/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/img/ NR /ows-img/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/sample/ NR /sample/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/sample/bin/ CR /sample/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/ NR /demo/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/bin/ CR /demo/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/res/ NR /demo/img/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/ NR /demo/src/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/img/ NR /tr-img/

```

```

;
;
; File Cache
;
; List the full virtual filename path or wild-card
; expression denoting one or more files in the Server's
; virtual file system.

```

```

;[FileCache]
;/products/*
;/products/xr25/Version*.c
;/employees/list/phones

```

```

;
; Language Extensions
;
; List for each combination of language type
; and character set one or more unique
; extensions.

```

```

;[LangExt]
en iso-8859-1 eng
en unicode-1-1 engU uc
fr-CA iso-8859-1 frc
fr-FR iso-8859-1 fr
jp-JP iso-2022-jp jp
jp-JP unicode-1-1-utf-8 jpU

```

```

;
; MIME Types
;
; List for each combination of MIME Type
; and representation one or more unique
; extensions.

```

```

;[MIMETypes]
text/html htm html
image/jpeg jpg jpeg
image/gif gif
appl/text doc
text/plain txt ksh lst
application/pdf pdf
application/postscript ps
x-world/x-vrml wrl vrml

```

```

;
[Encodings]

```

```

compress Z
gzip gz
;

;
;The ordering of the DynApps should not be changed
[DynApps]
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/ndwfss.so oracle_adp_init
~~~TEMPLATE: \web\svmstage.cfg
;; Oracle Internet Commerce listener information file
;; Copyright (C) 1997 Oracle Corporation. All rights reserved.

[MultiPort]
ANY      O_A_S_B_A_S_E20      NORM      H_O_S_T_N_A_M_E.D_O_M_A_I_N      /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/mstage/
NONE
;
[NetInfo]
MaxConnectCount      =      338
DNSResolution      =      NEVER
ServerPID      =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/mstage/svmsta
ge.pid
;
;
; Log Information
;
; Set values for ...
;      LogDir      ... Place for all log files
;      LogInfoFile ... Information (Audit) Log file
;      LogErrorFile ... Error Log File
;
[LogParams]
AdminRollover      = never
TimeStyle      = GMT
AdminFile      =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/mstage/svmsta
ge.err
;
;
; Server Parameters
;
; Set values for ...
;      RequestTimeout      ... Time out for incoming requests
;      ResponseTimeout      ... Time out for outgoing responses
;      ScriptTimeout      ... Time out for Script response time
;
[Server]
InitialFile      = storDsgr.htm
DefaultMIMEType      = text/html
; UserDir      = public_html
; UserDirInitialFile = myinitial.html
DefaultCharset      = iso-8859-1
PreferredLanguage      = en
ImageMap      = map
UseDirIndexing      = FALSE
CGITimeout      = 900
;
; Secure Information Parameters

```

```

;
; Set values for ...
;   UserID          ... Acquire privileges for User ID
;   GroupID         ... Acquire privileges for Group ID
;
[SecureInfo]
UserID          = I_C_S
GroupID         = G_R_O_U_P_N_A_M_E
;
;
; Directory Mappings
;
; List each mapping from a physical directory to a
; virtual directory, including the indicator whether
; the directory contains scripts or whether the
; subdirectories should be mapped recursively (R) or
; non-recursively (N).
;
[DirMaps]
; This first line which has ?/ows/doc needs to be here to keep
; the virtual path ordering correct.
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/doc/      NR      /

O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/stage/store/templates/multimedia/      NR
/multimedia_dir/

O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/bin/      CN      /ows-bin/

;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin/      CN      /ows-bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/      NR      /ows-doc/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admdoc/      NR      /ows-adoc/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/img/      NR      /ows-img/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/sample/      NR      /sample/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/sample/bin/      CR      /sample/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/      NR      /demo/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/bin/      CR      /demo/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/res/      NR      /demo/img/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/      NR      /demo/src/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/img/      NR      /tr-img/

;
;
; File Cache
;
; List the full virtual filename path or wild-card
; expression denoting one or more files in the Server's
; virtual file system.
;
[FileCache]
;/products/*
;/products/xr25/Version*.c
;/employees/list/phones
;
;
; Language Extensions
;
; List for each combination of language type
; and character set one or more unique
; extensions.
;

```

```

[LangExt]
en          iso-8859-1          eng
en          unicode-1-1        engU uc
fr-CA       iso-8859-1          frc
fr-FR       iso-8859-1          fr
jp-JP       iso-2022-jp         jp
jp-JP       unicode-1-1-utf-8   jpU
;
;
; MIME Types
;
; List for each combination of MIME Type
; and representation one or more unique
; extensions.
;
[MIMEtypes]
text/html    htm html
image/jpeg   jpg jpeg
image/gif     gif
appl/text     doc
text/plain    txt ksh lst
application/pdf pdf
application/postscript ps
x-world/x-vrml wrl vrml

;
[Encodings]
compress      Z
gzip          gz
;

;
;The ordering of the DynApps should not be changed
[DynApps]
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/ndwfss.so oracle_adp_init
~~~TEMPLATE: \web\svnode.cfg
;
[MultiPort]
ANY O_A_S_N_O_D_E_P_O_R_T NORM
H_O_S_T_N_A_M_E.D_O_M_A_I_N /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/node/ NONE

ANY O_A_S_N_O_D_E_P_O_R_T NORM H_O_S_T_N_A_M_E
/
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/node/ NONE

;
[NetInfo]
MaxConnectCount = 500
DNSResolution = ALWAYS
ServerPID =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/node/svno
de.pid
;
[LogParams]
AdminRollover = never
TimeStyle = LOCAL
AdminFile =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/node/svno

```

```

de.err
;
[ConnectionLogs]
svnode.log CLF {CLF}
;
[Server]
InitialFile = welcome.html
DefaultMIMEType = application/octet-stream
DefaultCharset = iso-8859-1
PreferredLanguage = en
ImageMap = map
UseDirIndexing = FALSE
CGITimeout = 900
FileCaching = ON
;
[SecureInfo]
UserID = I_C_S
GroupID = G_R_O_U_P_N_A_M_E
;
[DirMaps]
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/doc/ NR /
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/cartx/jweb/ NR /jweb/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/admin/cgi/ CR /orb40-abin/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/orb/4.0/doc/ NR /orb40-adoc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/cgi/ CR /ows-abin/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/classes/ NR /ows-aclass/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/doc/ NR /ows-adoc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/img/ NR /ows-aimg/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/ NR /ows-apps/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/cgi/ CR /ows-deploy/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /ows-doc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/img/ NR /ows-img/
;
[LangExt]
en iso-8859-1 eng
en unicode-1-1 engU uc
fr-CA iso-8859-1 frc
fr-FR iso-8859-1 fr
jp-JP iso-2022-jp jp
jp-JP unicode-1-1-utf-8 jpU
;
[MIMETypes]
application/octet-stream bin
application/astound asd asn
application/fastman lcc
application/java-archive jar
application/java-serialized-object ser
application/java-vm class
application/mac-binhex40 hqx
application/x-stuffit sit
application/mbedlet mbd

```

|                                             |        |      |     |
|---------------------------------------------|--------|------|-----|
| application/msword doc                      |        |      |     |
| application/oda oda                         |        |      |     |
| application/pdf pdf                         |        |      |     |
| application/postscript ai                   | eps    | ps   |     |
| application/rtf rtf                         |        |      |     |
| application/stucom smp                      |        |      |     |
| application/timbuktu tbt                    |        |      |     |
| application/vnd.ms-excel xls                | xlw    | xla  | xlc |
| application/vnd.ms-excel xlm                |        |      |     |
| application/vnd.ms-excel xlt                |        |      |     |
| application/vnd.ms-powerpoint ppt           | pps    | pot  |     |
| application/vnd.ms-project mpp              |        |      |     |
| application/winhlb hlp                      |        |      |     |
| application/x-javascript js                 |        |      |     |
| application/x-javascript; charset=UTF-8 jsu |        |      |     |
| application/x-asap asp                      |        |      |     |
| application/x-csh csh                       |        |      |     |
| application/x-dot dot                       |        |      |     |
| application/x-dvi dvi                       |        |      |     |
| application/x-earthtime etc                 |        |      |     |
| application/x-envoy evy                     |        |      |     |
| application/x-excel xls                     | xlw    | xl1  | xlm |
| application/x-gtar gtar                     |        |      |     |
| application/x-cpio cpio                     |        |      |     |
| application/x-hdf hdf                       |        |      |     |
| application/x-latex latex                   |        |      |     |
| application/x-javascript-config jsc         |        |      |     |
| application/x-maker fm                      |        |      |     |
| application/x-mif mif                       | mi     |      |     |
| application/x-mocha mocha                   | moc    |      |     |
| application/x-msaccess mdb                  |        |      |     |
| application/x-mscardfile crd                |        |      |     |
| application/x-msclip clp                    |        |      |     |
| application/x-msmediaview m13               | m14    |      |     |
| application/x-msmetafile wmf                |        |      |     |
| application/x-msmoney mny                   |        |      |     |
| application/x-mspublisher pub               |        |      |     |
| application/x-msschedule scd                |        |      |     |
| application/x-msterial trm                  |        |      |     |
| application/x-mswrite wri                   |        |      |     |
| application/x-NET-Install ins               |        |      |     |
| application/x-netcdf nc                     | cdf    |      |     |
| application/x-ns-proxy-autoconfig proxy     |        |      |     |
| application/x-pointplus css                 |        |      |     |
| application/x-salsa slc                     |        |      |     |
| application/x-sh sh                         |        |      |     |
| application/x-shar shar                     |        |      |     |
| application/x-sprite spr                    | sprite |      |     |
| application/x-tar tar                       |        |      |     |
| application/x-tcl tcl                       |        |      |     |
| application/x-perl pl                       |        |      |     |
| application/x-tex tex                       |        |      |     |
| application/x-texinfo texinfo               | texi   |      |     |
| application/x-timbuktu tbt                  |        |      |     |
| application/x-tkined tki                    | tkined |      |     |
| application/x-troff-man man                 |        |      |     |
| application/x-troff-me me                   |        |      |     |
| application/x-troff-ms ms                   |        |      |     |
| application/x-troff t                       | tr     | roff |     |



|                            |       |       |      |      |
|----------------------------|-------|-------|------|------|
| application/x-wais-source  | src   |       |      |      |
| application/zip            | zip   |       |      |      |
| application/pre-encrypted  | enc   |       |      |      |
| application/x-pkcs7-crl    | crl   |       |      |      |
| application/x-fortezza-ckl | ckl   |       |      |      |
| audio/basic                | au    | snd   |      |      |
| audio/echospeech           | es    | esl   |      |      |
| audio/midi                 | midi  | mid   |      |      |
| audio/x-aiff               | aif   | aiff  | aifc |      |
| audio/x-wav                | wav   |       |      |      |
| audio/x-pn-realaudio       | ra    | ram   |      |      |
| audio/x-pac                | pac   |       |      |      |
| audio/x-epac               | paе   |       |      |      |
| audio/x-liveaudio          | lam   |       |      |      |
| drawing/x-dwf              | dwf   |       |      |      |
| image/fif                  | fif   |       |      |      |
| image/gif                  | gif   |       |      |      |
| image/ief                  | ief   |       |      |      |
| image/ifs                  | ifs   |       |      |      |
| image/jpeg                 | jpeg  | jpg   | jpe  | jfif |
|                            | pjpeg | pjp   |      |      |
| image/png                  | png   |       |      |      |
| image/tiff                 | tiff  | tif   |      |      |
| image/vnd                  | dwg   | svf   |      |      |
| image/wavelet              | wi    |       |      |      |
| image/bmp                  | bmp   |       |      |      |
| image/x-photo-cd           | pcd   |       |      |      |
| image/x-cmu-raster         | ras   |       |      |      |
| image/x-portable-anymap    | pnm   |       |      |      |
| image/x-portable-bitmap    | pbm   |       |      |      |
| image/x-portable-graymap   | pgm   |       |      |      |
| image/x-portable-pixmap    | ppm   |       |      |      |
| image/x-rgb                | rgb   |       |      |      |
| image/x-xbitmap            | xbm   |       |      |      |
| image/x-xpixmap            | xpm   |       |      |      |
| image/x-xwindowdump        | xwd   |       |      |      |
| text/html                  | htm   | html  |      |      |
| text/plain                 | txt   | c     | lst  | java |
| text/richtext              | rtx   |       |      |      |
| text/tab-separated-values  | tsv   |       |      |      |
| text/x-setext              | etx   |       |      |      |
| text/x-speech              | talk  |       |      |      |
| video/isisvideo            | fvi   |       |      |      |
| video/mpeg                 | mpeg  | mpg   | mpe  | mpv  |
|                            | vbs   | mpegv |      |      |
| video/x-mpeg2              | mpv2  | mp2v  |      |      |
| video/msvideo              | avi   |       |      |      |
| video/quicktime            | qt    | mov   | moov |      |
| video/vivo                 | viv   | vivo  |      |      |
| video/wavelet              | wv    |       |      |      |
| video/x-sgi-movie          | movie |       |      |      |
| x-world/x-svr              | svr   |       |      |      |
| x-world/x-vrml             | wrl   |       |      |      |
| x-world/x-vrt              | vrt   |       |      |      |
| appl/text                  | doc   |       |      |      |
| model/vrml                 | wrl   | vrml  |      |      |
| x-conference/x-cooltalk    | ice   |       |      |      |
| x-gzip                     | gz    |       |      |      |

```

x-compress z
x-uuencode uu uue
application/x-x509-ca-cert cacert
application/x-x509-server-cert scert
application/x-x509-user-cert ucert
application/x-x509-email-cert ecert
;
[Encodings]
compress Z
gzip gz
;
[Security]
Basic {
 (Users)
 admin: JPPMDBLOKGHDOJMC
 (Groups)
 dba: admin
 (Realms)
 Node Manager Server: dba
}
;
;
[Protection]
/ R Basic(Node Manager Server)
---TEMPLATE: \web\svots.cfg
;; Oracle Telephony listener information file
;; Copyright (C) 1998 Oracle Corporation. All rights reserved.

[MultiPort]
ANY O_A_S_B_A_S_E23 NORM H_O_S_T_N_A_M_E.D_O_M_A_I_N /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/ots/ NONE
;
[NetInfo]
MaxConnectCount = 338
DNSResolution = NEVER
ServerPID =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/ots/svots.pid
;
;
; Log Information
;
; Set values for ...
; LogDir ... Place for all log files
; LogInfoFile ... Information (Audit) Log file
; LogErrorFile ... Error Log File
;
[LogParams]
AdminRollover = never
TimeStyle = GMT
AdminFile =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_R_A_C_L_E_S_I_D/httpd_H_O_S_T_N_A_M_E/ots/svots.err
;
;
; Server Parameters
;
; Set values for ...
; RequestTimeout ... Time out for incoming requests
; ResponseTimeout ... Time out for outgoing responses
; ScriptTimeout ... Time out for Script response time

```

```

;
[Server]
;InitialFile = ots.en.htm
DefaultMIMEType = text/html
; UserDir = public_html
; UserDirInitialFile = myinitial.html
DefaultCharset = iso-8859-1
PreferredLanguage = en
ImageMap = map
UseDirIndexing = FALSE
CGITimeout = 900
;
; Secure Information Parameters
;
; Set values for ...
; UserID ... Acquire privileges for User ID
; GroupID ... Acquire privileges for Group ID
;
[SecureInfo]
UserID = I_C_S
GroupID = G_R_O_U_P_N_A_M_E
;
;
; Directory Mappings
;
; List each mapping from a physical directory to a
; virtual directory, including the indicator whether
; the directory contains scripts or whether the
; subdirectories should be mapped recursively (R) or
; non-recursively (N).
;
[DirMaps]
; This first line which has ?/ows/doc needs to be here to keep
; the virtual path ordering correct.
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin/ CN /ows-bin/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /ows-doc/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admdoc/ NR /ows-adoc/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/img/ NR /ows-img/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/sample/ NR /sample/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/sample/bin/ CR /sample/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/ NR /demo/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/bin/ CR /demo/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/res/ NR /demo/img/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/ NR /demo/src/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/img/ NR /tr-img/

;
;
; File Cache
;
; List the full virtual filename path or wild-card
; expression denoting one or more files in the Server's
; virtual file system.
;
[FileCache]
;/products/*
;/products/xr25/Version*.c
;/employees/list/phones

```

```

;
;
; Language Extensions
;
; List for each combination of language type
; and character set one or more unique
; extensions.
;
[LangExt]
en iso-8859-1 eng
en unicode-1-1 engU uc
fr-CA iso-8859-1 frc
fr-FR iso-8859-1 fr
jp-JP iso-2022-jp jp
jp-JP unicode-1-1-utf-8 jpU
;
;
; MIME Types
;
; List for each combination of MIME Type
; and representation one or more unique
; extensions.
;
[MIMETypes]
text/html htm html
image/jpeg jpg jpeg
image/gif gif
appl/text doc
text/plain txt ksh lst
application/pdf pdf
application/postscript ps
x-world/x-vrml wrl vrml

;
[Encodings]
compress Z
gzip gz
;
;
;The ordering of the DynApps should not be changed
[DynApps]
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/ndwfss.so oracle_adp_init
---TEMPLATE: \web\svwww.cfg
[MultiPort]
ANY O_A_S_B_A_S_E11 NORM H_O_S_T_N_A_M_E.D_O_M_A_I_N /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/www/
NONE
ANY O_A_S_B_A_S_E11 NORM H_O_S_T_N_A_M_E /
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/www/
NONE
;
[NetInfo]
MaxConnectCount = 500
DNSResolution = NEVER
ServerPID =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/www/svwww
.pid
;

```

```

;
; Log Information
;
; Set values for ...
; LogDir ... Place for all log files
; LogInfoFile ... Information (Audit) Log file
; LogErrorFile ... Error Log File
;
[LogParams]
AdminRollover = never
TimeStyle = LOCAL
AdminFile =
O_R_A_C_L_E_O_A_S_B_A_S_E/admin/ows/O_A_S_S_I_T_E_N_A_M_E/httpd_H_O_S_T_N_A_M_E/www/svwww
.err
;
;
; Server Parameters
;
; Set values for ...
; RequestTimeout ... Time out for incoming requests
; ResponseTimeout ... Time out for outgoing responses
; ScriptTimeout ... Time out for Script response time
;
[Server]
InitialFile = wwwIndex.html
DefaultMIMEType = application/octet-stream
; UserDir = public_html
; UserDirInitialFile = myinitial.html
DefaultCharset = iso-8859-1
PreferredLanguage = en
ImageMap = map
UseDirIndexing = FALSE
CGITimeout = 900
FileCaching = ON
;
; Secure Information Parameters
;
; Set values for ...
; UserID ... Acquire privileges for User ID
; GroupID ... Acquire privileges for Group ID
;
[SecureInfo]
UserID = I_C_S
GroupID = G_R_O_U_P_N_A_M_E
;
;
; Directory Mappings
;
; List each mapping from a physical directory to a
; virtual directory, including the indicator whether
; the directory contains scripts or whether the
; subdirectories should be mapped recursively (R) or
; non-recursively (N).
;
[DirMaps]
; This first line which has ?/ows/doc needs to be here to keep
; the virtual path ordering correct.
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/bin/ CN /ows-bin/

```

```
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/doc/ NR /ows-doc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/doc/ NR /ows-adoc/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/img/ NR /ows-img/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/admin/img/ NR /ows-aimg/
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/classes/ NR /ows-vbclasses/
```

```
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/ NR /demo/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/bin/ CR /demo/bin/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/res/ NR /demo/img/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/ NR /demo/src/
;O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/demo/img/ NR /tr-img/
```

```
;
;
; File Cache
;
; List the full virtual filename path or wild-card
; expression denoting one or more files in the Server's
; virtual file system.
```

```
;
;[FileCache]
;/products/*
;/products/xr25/Version*.c
;/employees/list/phones
```

```
;
; Language Extensions
;
; List for each combination of language type
; and character set one or more unique
; extensions.
```

```
;
;[LangExt]
en iso-8859-1 eng
en unicode-1-1 engU uc
fr-CA iso-8859-1 frc
fr-FR iso-8859-1 fr
jp-JP iso-2022-jp jp
jp-JP unicode-1-1-utf-8 jpU
```

```
;
; MIME Types
;
; List for each combination of MIME Type
; and representation one or more unique
; extensions.
```

```
;
;[MIMETypes]
application/octet-stream bin
application/astound asd asn
application/fastman lcc
application/java-archive jar
application/java-serialized-object ser
application/java-vm class
application/mac-binhex40 hqx
application/x-stuffit sit
application/mbedlet mbd
application/msword doc
application/oda oda
```

|                                        |                         |
|----------------------------------------|-------------------------|
| application/pdf                        | pdf                     |
| application/postscript                 | ai eps ps               |
| application/rtf                        | rtf                     |
| application/studiom                    | smp                     |
| application/timbuktu                   | tbt                     |
| application/vnd.ms-excel               | xls xlw xla xlc xlm xlt |
| application/vnd.ms-powerpoint          | ppt pps pot             |
| application/vnd.ms-project             | mpp                     |
| application/winhelp                    | hlp                     |
| application/x-javascript               | js                      |
| application/x-javascript;charset=UTF-8 | jsu                     |
| application/x-asap                     | asp                     |
| application/x-csh                      | csh                     |
| application/x-dot                      | dot                     |
| application/x-dvi                      | dvi                     |
| application/x-earthtime                | etc                     |
| application/x-envoy                    | evy                     |
| application/x-excel                    | xls xlc xll xlm xlw     |
| application/x-gtar                     | gtar                    |
| application/x-cpio                     | cpio                    |
| application/x-hdf                      | hdf                     |
| application/x-latex                    | latex                   |
| application/x-javascript-config        | jsc                     |
| application/x-maker                    | fm                      |
| application/x-mif                      | mif mi                  |
| application/x-mocha                    | mocha moc               |
| application/x-msaccess                 | mdb                     |
| application/x-mscardfile               | crd                     |
| application/x-msclip                   | clp                     |
| application/x-msmediaview              | m13 m14                 |
| application/x-msmetafile               | wmf                     |
| application/x-msmoney                  | mny                     |
| application/x-mspublisher              | pub                     |
| application/x-msschedule               | scd                     |
| application/x-msterial                 | trm                     |
| application/x-mswrite                  | wri                     |
| application/x-NET-Install              | ins                     |
| application/x-netcdf                   | nc cdf                  |
| application/x-ns-proxy-autoconfig      | proxy                   |
| application/x-pointplus                | css                     |
| application/x-salsa                    | slc                     |
| application/x-sh                       | sh                      |
| application/x-shar                     | shar                    |
| application/x-sprite                   | spr sprite              |
| application/x-tar                      | tar                     |
| application/x-tcl                      | tcl                     |
| application/x-perl                     | pl                      |
| application/x-tex                      | tex                     |
| application/x-texinfo                  | texinfo texi            |
| application/x-timbuktu                 | tbp                     |
| application/x-tkined                   | tki tkined              |
| application/x-troff-man                | man                     |
| application/x-troff-me                 | me                      |
| application/x-troff-ms                 | ms                      |
| application/x-troff                    | t tr roff               |
| application/x-wais-source              | src                     |
| application/zip                        | zip                     |
| application/pre-encrypted              | enc                     |
| application/x-pkcs7-crl                | crl                     |

```

application/x-fortezza-ckl ckl
audio/basic au snd
audio/echospeech es esl
audio/midi midi mid
audio/x-aiff aif aiff aifc
audio/x-wav wav
audio/x-pn-realaudio ra ram
audio/x-pac pac
audio/x-epac pae
audio/x-liveaudio lam
drawing/x-dwf dwf
image/fif fif
image/gif gif
image/ief ief
image/ifs ifs
image/jpeg jpeg jpg jpe jfif pjpeg pjp
image/png png
image/tiff tiff tif
image/vnd dwg svf
image/wavelet wi
image/bmp bmp
image/x-photo-cd pcd
image/x-cmu-raster ras
image/x-portable-anymap pnm
image/x-portable-bitmap pbm
image/x-portable-graymap pgm
image/x-portable-pixmap ppm
image/x-rgb rgb
image/x-xbitmap xbm
image/x-xpixmap xpm
image/x-xwindowdump xwd
text/html htm html
text/plain txt c lst java
text/richtext rtx
text/tab-separated-values tsv
text/x-setext etx
text/x-speech talk
video/isisvideo fvi
video/mpeg mpeg mpg mpe mpv vbs mpegv
video/x-mpeg2 mpv2 mp2v
video/msvideo avi
video/quicktime qt mov moov
video/vivo viv vivo
video/wavelet wv
video/x-sgi-movie movie
x-world/x-svr svr
x-world/x-vrml wrl
x-world/x-vrt vrt
appl/text doc
model/vrml wrl vrml
x-conference/x-cooltalk ice
x-gzip gz
x-compress z
x-uuencode uu uue
application/x-x509-ca-cert cacert
application/x-x509-server-cert scert
application/x-x509-user-cert ucert
application/x-x509-email-cert ecert
;

```



```

[Encodings]
compress Z
gzip gz
;

;
;The ordering of the DynApps should not be changed
[DynApps]
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/lib/ndwfss.so oracle_adp_init
~~~TEMPLATE: \web\wrb.app
;
[SYSTEM]
SiteName      = O_A_S_S_I_T_E_N_A_M_E
DisplaySiteName = O_A_S_S_I_T_E_N_A_M_E Site
WRB_primary_host = H_O_S_T_N_A_M_E.D_O_M_A_I_N
WRB_crypt      = v1.0
WRB_type       = cb5b9f52c5422e349578738a22731d5e
HostList      = H_O_S_T_N_A_M_E
CollapseProcessModel = TRUE
PriorityScheduling = yes
NextResourceId = 1001
OASEdition     = Enterprise Edition
OASVersion     = 4.0.8.1.0
OASCompatibleVersion = 4.0.8.1.0
RuntimeList    = CWEB, CCORBA, ECO4JAVA, EJB, JavaCorba, JAWAWE, JSERVLET, LiveHTML,
PERL, PLSQL
AppsList       = owsapps,DB_Uilities, mstage, cstage, mdeploy, ots, cdeploy
;
[SYSTEM.HA]
ConfigProvider = Disabled
AuthServer     = Disabled
Broker         = Disabled
Logger         = Disabled
CartridgeServerFac = Disabled
Dispatcher     = Enabled
MonitorDaemon  = Disabled
RMPProxy       = Disabled
Timeout        = 30
BrokerTimeout  = 60
;
[Basic]
Realm.Admin Server = Administrators
Group.Administrators = admin
User.admin         = 1d0258c2440a8d19e716292b231e3190
;
[AuthService]
Service.Mode     = INMEMORY
Schemes.INMEMORY = Basic, Digest, IP, Domain
Schemes.ORB      = Basic_Oracle, Cert, Crypt
Schemes.ORBHOST  = Basic_Oracle, Cert, Crypt
Scheme.Basic.Lib = %ORAWEB_HOME%/lib/libwrasbasic.so, wrASPBID_dyn_init
Scheme.Digest.Lib = %ORAWEB_HOME%/lib/libwrasdigest.so, wrASPGDI_dyn_init
Scheme.IP.Lib    = %ORAWEB_HOME%/lib/libwrasip.so, wrASPIDI_dyn_init
Scheme.Domain.Lib = %ORAWEB_HOME%/lib/libwrasdomain.so, wrASPDID_dyn_init
Scheme.Basic_Oracle.Lib = %ORAWEB_HOME%/lib/libwrasoracle.so, wrASPODI_dyn_init
Scheme.Cert.Lib  = %ORAWEB_HOME%/lib/libwrascert.so, wrASPCDI_dyn_init
Scheme.Crypt.Lib = %ORAWEB_HOME%/lib/libwrascrypt.so, wrASPRDI_dyn_init
Scheme.IP.Impl   = WRAS_IP
Scheme.Basic.Impl = WRAS_BASIC

```

```

Scheme.Digest.Impl = WRAS_DIGEST
Scheme.Domain.Impl = WRAS_DOMAIN
Scheme.Basic_Oracle.Impl = WRAS_BASIC_ORACLE
Scheme.Cert.Impl = WRAS_CERT
Scheme.Crypt.Impl = WRAS_CRYPT
;
[Logger]
logger_dad_name = DBA
logger_batch = ON
logger_rollover = Never
logger_logxlf = ON
logger_logxlf_desttype = FS
logger_logxlf_destdir = %ORAWEB_ADMIN%/O_A_S_S_I_T_E_N_A_M_E/log
logger_logxlf_destfname = xlfO_R_A_C_L_E_S_I_D.log
logger_logxlf_maxfsize = 10000000
logger_logxlf_archivedir = %ORAWEB_ADMIN%/O_A_S_S_I_T_E_N_A_M_E/log
logger_logxlf_fields = clf
logger_logsys = ON
logger_logsys_desttype = FS
logger_logsys_destdir = %ORAWEB_ADMIN%/O_A_S_S_I_T_E_N_A_M_E/log
logger_logsys_destfname = wrbO_R_A_C_L_E_S_I_D.log
logger_logsys_maxfsize = 10000000
logger_logsys_archivedir = %ORAWEB_ADMIN%/O_A_S_S_I_T_E_N_A_M_E/log
logger_logsys_mask = 0xFFFFFFFF
logger_logsys_level = 15
logger_logattrib = ON
logger_logattrib_desttype = FS
logger_logattrib_destfname = attribO_R_A_C_L_E_S_I_D.log
logger_logattrib_destdir = %ORAWEB_ADMIN%/O_A_S_S_I_T_E_N_A_M_E/log
logger_logattrib_maxfsize = 10000000
logger_logattrib_archivedir = %ORAWEB_ADMIN%/O_A_S_S_I_T_E_N_A_M_E/log
;
[RUNTIME.CWEB]
RuntimeVersion = 4.0
DisplayName = "C Web"
AppFile = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/install/CWEB.app
AddAppURL = /ows-abin/apadmin?FORM_CODE=APP_TYPE&AppType=CWEB&ConfigMode>manual
AddCartxURL = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
;
[APPLICATION.owsapps]
ServerInterface = WEB
ServerRuntime = CWEB
CartTimeout = 86400
Hosts = H_O_S_T_N_A_M_E
ExecString = wrks -s
Priority = medium
DisplayName = "Server Status Monitor App"
Cartridges = owsapps/owsstat
;
[APPLICATION.owsapps.WEB]
AppMimeTypes = - jpeg,gif
GetClientCert = Disabled
Session = Disabled
SessionIdle = 15
;
[AppDirs]
/owsapps/owsstat owsapps/owsstat %ORAWEB_HOME%/bin

```

```

/owsstat          owsapps/owsstat      %ORAWEB_HOME%/bin
/DB_Utilityies/DB_Browser DB_Utilityies/DB_Browser %ORAWEB_HOME%/bin
/DB_Utilityies/Log_Analyzer DB_Utilityies/Log_Analyzer %ORAWEB_HOME%/bin
/oec              mstage/mstage        %ORACLE_HOME%/oec/java/cartx
/cec              cstage/cstage         %ORACLE_HOME%/oec/java/cartx
/mec              mdeploy/mdeploy       %ORACLE_HOME%/oec/java/cartx
/ots              ots/ots               %ORACLE_HOME%/oec/java/tpi
/cust             cdeploy/cdeploy       %ORACLE_HOME%/oec/java/cartx
;
[SYSTEM_owsapps/owsstat]
Stateless        = FALSE
ThreadSafe       = no
Prestart         = 0
MinInstances     = 1
MaxInstances     = 10
MinThreads       = 1
MaxThreads       = 1
Application      = owsapps
DisplayName      = "Web Server Status Monitor"
;
[Apps]
owsapps/owsstat  %ORAWEB_HOME%/lib/wstat.so testentry
DB_Utilityies/DB_Browser %ORAWEB_HOME%/../cartx/plsql/lib/libndwoa.so ndwoadinit
DB_Utilityies/Log_Analyzer %ORAWEB_HOME%/../cartx/plsql/lib/libndwoa.so ndwoadinit
mstage/mstage    %ORACLE_HOME%/ows/cartx/jweb/lib/libjcartx.so ojsdinit
cstage/cstage    %ORACLE_HOME%/ows/cartx/jweb/lib/libjcartx.so ojsdinit
mdploy/mdploy    %ORACLE_HOME%/ows/cartx/jweb/lib/libjcartx.so ojsdinit
ots/ots          %ORACLE_HOME%/ows/cartx/jweb/lib/libjcartx.so ojsdinit
cdploy/cdeploy   %ORACLE_HOME%/ows/cartx/jweb/lib/libjcartx.so ojsdinit
;
[RUNTIME.CCORBA]
RuntimeVersion   = 4.0.8
DisplayName      = "C++ Corba"
AppFile          = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/install/CCORBA.app
AddAppURL        = /ows-abin/jcgi.bat?FORM_CODE=j_cpp_ccorba_install
AddCartxURL      = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL        = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL      = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
AppsDir          = ../cpp
;
[RUNTIME.ECO4JAVA]
RuntimeVersion   = 4.0
DisplayName      = "Enterprise Corba Objects for Java"
AppFile          = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/install/ECO4JAVA.app
AddAppURL        = /ows-abin/jcgi.bat?FORM_CODE=j_eco_add
AddCartxURL      = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL        = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL      = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
AppsDir          = ../apps/eco4j
;
[RUNTIME.EJB]
RuntimeVersion   = 4.0
DisplayName      = "Enterprise JavaBeans"
AppFile          = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/install/EJB.app
AddAppURL        = /ows-abin/jcgi.bat?FORM_CODE=j_ejb_add
AddCartxURL      = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL        = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL      = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
AppsDir          = ../apps/ejb

```

```

;
[RUNTIME.JavaCorba]
RuntimeVersion      = 4.0
DisplayName         = "JCorba"
AppFile            = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/install/JavaCORBA.app
AddAppURL          = /ows-abin/jcgi.bat?FORM_CODE=j_jco_add
AddCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL          = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
AppsDir            = ../apps/jco
;
[RUNTIME.JAVAWEB]
RuntimeVersion      = 4.0
DisplayName         = "JWeb"
AppFile            =
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/./cartx/jweb/install/javaweb.app
AddAppURL          =
/ows-abin/apadmin?FORM_CODE=APP_TYPE&AppType=JAVAWEB&ConfigMode=manual
AddCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL          = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
;
[RUNTIME.JSERVLET]
RuntimeVersion      = 4.0
DisplayName         = "JServlet"
AppFile            =
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/./cartx/jweb/install/jservlet.app
AddAppURL          =
/ows-abin/apadmin?FORM_CODE=APP_TYPE&AppType=JSERVLET&ConfigMode=manual
AddCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL          = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
;
[RUNTIME.LiveHTML]
RuntimeVersion      = 4.0
DisplayName         = "LiveHTML"
AppFile            =
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/./cartx/livehtml/install/livehtml.app
AddAppURL          =
/ows-abin/apadmin?FORM_CODE=APP_TYPE&AppType=LiveHTMLL&ConfigMode=manual
AddCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL          = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
;
[RUNTIME.PERL]
RuntimeVersion      = 4.0
DisplayName         = "Perl"
AppFile            = O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/cartx/perl/install/perl.app
AddAppURL          = /ows-abin/apadmin?FORM_CODE=APP_TYPE&AppType=PERL&ConfigMode=manual
AddCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL          = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL        = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
;
[RUNTIME.PLSQL]
RuntimeVersion      = 4.0
DisplayName         = "PL/SQL"
AppFile            =
O_R_A_C_L_E_O_A_S_P_R_O_D_B_A_S_E/ows/4.0/./cartx/plsql/install/runtime_plsql.app
AddAppURL          = /ows-abin/apadmin?FORM_CODE=APP_TYPE&AppType=PLSQL&ConfigMode=manual

```

```

AddCartxURL      = /ows-abin/apadmin?FORM_CODE=CARTX_ADD
DelAppURL        = /ows-abin/apadmin?FORM_CODE=APP_DEL
DelCartxURL      = /ows-abin/apadmin?FORM_CODE=CARTX_DEL
;
[APPLICATION.DB_Utilityies]
Hosts            = H_O_S_T_N_A_M_E
ExecString       = wrks -s
ServerInterface  = WEB
CartTimeout      = 86400
Priority         = medium
DisplayName      = "DB Utilityies"
ServerRuntime    = PLSQL
Cartridges       = DB_Utilityies/Log_Analyzer, DB_Utilityies/DB_Browser
;
[APPLICATION.DB_Utilityies.WEB]
AppMimeTypes     = - jpeg,gif
GetClientCert    = Disabled
Session          = Disabled
SessionIdle      = 15
;
[SYSTEM_DB_Utilityies/DB_Browser]
Stateless        = FALSE
ThreadSafe       = TRUE
Prestart         = 0
MinInstances     = 0
MaxInstances     = 10
MinThreads       = 1
MaxThreads       = 1
Application      = DB_Utilityies
DisplayName      = "DB Browser"
;
[SYSTEM_DB_Utilityies/Log_Analyzer]
Stateless        = FALSE
ThreadSafe       = TRUE
Prestart         = 0
MinInstances     = 0
MaxInstances     = 10
MinThreads       = 1
MaxThreads       = 1
Application      = DB_Utilityies
DisplayName      = "Log Analyzer"
;
[DB_Utilityies/Log_Analyzer_DB_Utilityies/Log_Analyzer]
owa_error_page   = error.html
owa_pkg_protect  = TRUE
owa_error_level  = 2
;
[DB_Utilityies/DB_Browser_DB_Utilityies/DB_Browser]
owa_error_page   = error.html
owa_pkg_protect  = TRUE
owa_error_level  = 2
;
[APPLICATION.mstage]
ServerInterface  = WEB
ServerRuntime    = JAVAWEB
CartTimeout      = 86400
Hosts            = H_O_S_T_N_A_M_E
ExecString       = wrks -s
Priority         = medium

```

```

DisplayName      = "OIC - mstage"
Cartridges       = mstage/mstage
;
[APPLICATION.mstage.ENV]
JAVA_HOME        = %ORAWEB_HOME%/jdk
CLASSPATH        =
%ORACLE_HOME%/orb/4.0/classes/session.jar:%ORACLE_HOME%/orb/4.0/classes/cache.jar:%ORAWEB
_HOME%/jdk/lib/classes.zip:%ORAWEB_HOME%/classes/services.jar:%ORACLE_HOME%/ows/cartx/jwe
b/classes/jweb.jar:%ORACLE_HOME%/orb/4.0/classes/yoj.jar:%ORACLE_HOME%/oec/java/tpi:%ORAC
LE_HOME%/oec/java/oec.zip:%ORACLE_HOME%/oec/storemgr/templates/applet/StrMgr2.zip:%ORACLE
_HOME%/oec/java/NetPerceptionsI.jar:%ORACLE_HOME%/oec/java/OrbixWeb_3.0.4.jar:%ORACLE_HOM
E%/oec/java:%CLASSPATH%
PATH             = %ORAWEB_HOME%/jdk/bin/sparc/native_threads:%PATH%
LD_LIBRARY_PATH  =
%ORAWEB_HOME%/jdk/lib/sparc/native_threads:%ORACLE_HOME%/ows/cartx/jweb/lib:%ORACLE_HOME%
/oec/lib:%LD_LIBRARY_PATH%
THREADS_FLAG     = native
;
[APPLICATION.mstage.WEB]
AppMimeTypes     = - jpeg,gif
GetClientCert    = Disabled
Session          = Disabled
SessionIdle      = 15
;
[APPLICATION.mstage.JAVA]
SYSTEM_PROPERTY  = ORAWEB_HOME=%ORAWEB_HOME%
SYSTEM_PROPERTY  = ORACLE_HOME=%ORACLE_HOME%
MAX_HEAP         = 64M
SYSTEM_PROPERTY  =
java.naming.factory.initial=oracle.oas.naming.jndi.CartxInitCtxFactory
;
[APPLICATION.mstage.LOG]
logger_logsys    = ON
logger_logsys_destdir = /tmp
logger_logsys_destfname = mstageO_R_A_C_L_E_S_I_D.log
logger_logsys_level = 0
;
[SYSTEM_mstage/mstage]
JavaWebInterface = 3.0
Stateless        = FALSE
ThreadSafe       = TRUE
Prestart         = 0
MinInstances     = 0
MaxInstances     = 1
MinThreads       = 1
MaxThreads       = 1
DisplayName      = "OIC - mstage"
Application      = mstage
;
[APPLICATION.cstage]
ServerInterface  = WEB
ServerRuntime    = JAWAWE
CartTimeout      = 86400
Hosts            = H_O_S_T_N_A_M_E
ExecString       = wrks -s
Priority          = medium
DisplayName      = "OIC - cstage"
Cartridges       = cstage/cstage
;

```

```

[APPLICATION.cstage.ENV]
JAVA_HOME           = %ORAWEB_HOME%/jdk
CLASSPATH           =
%ORACLE_HOME%/oec/java/OrbixWeb_3.0.4.jar:%ORACLE_HOME%/orb/4.0/classes/session.jar:%ORAC
LE_HOME%/orb/4.0/classes/cache.jar:%ORAWEB_HOME%/jdk/lib/classes.zip:%ORAWEB_HOME%/classe
s/services.jar:%ORACLE_HOME%/ows/cartx/jweb/classes/jweb.jar:%ORACLE_HOME%/orb/4.0/classe
s/yoj.jar:%ORACLE_HOME%/oec/java/tpi:%ORACLE_HOME%/oec/java/oec.zip:%ORACLE_HOME%/oec/jav
a/tpi:%ORACLE_HOME%/oec/java/opay.jar:%ORACLE_HOME%/oec/java/NetPerceptionsI.jar:%ORACLE_
HOME%/oec/java:%NP_HOME%/iona:%CLASSPATH%
PATH                = %ORAWEB_HOME%/jdk/bin/sparc/native_threads:%PATH%
LD_LIBRARY_PATH     =
%ORAWEB_HOME%/jdk/lib/sparc/native_threads:%ORACLE_HOME%/ows/cartx/jweb/lib:%ORACLE_HOME%
/oec/lib:%LD_LIBRARY_PATH%
THREADS_FLAG        = native
;
[APPLICATION.cstage.WEB]
AppMimeTypes        = - jpeg,gif
GetClientCert        = Disabled
Session              = Disabled
SessionIdle          = 15
;
[APPLICATION.cstage.JAVA]
SYSTEM_PROPERTY      = ORAWEB_HOME=%ORAWEB_HOME%
SYSTEM_PROPERTY      = ORACLE_HOME=%ORACLE_HOME%
MAX_HEAP              = 64M
SYSTEM_PROPERTY      =
java.naming.factory.initial=oracle.oas.naming.jndi.CartxInitCtxFactory
;
[APPLICATION.cstage.LOG]
logger_logsys        = ON
logger_logsys_destdir = /tmp
logger_logsys_destfname = cstage_O_A_S_S_I_T_E_N_A_M_Eics.log
logger_logsys_level = 15
;
[SYSTEM_cstage/cstage]
JavaWebInterface     = 3.0
Stateless             = FALSE
ThreadSafe            = TRUE
Prestart              = 0
MinInstances          = 0
MaxInstances          = 10
MinThreads            = 3
MaxThreads            = 10
DisplayName           = "OIC - cstage"
Application           = cstage
;
[APPLICATION.mdeploy]
ServerInterface       = WEB
ServerRuntime         = JAWAWE
CartTimeout           = 86400
Hosts                 = H_O_S_T_N_A_M_E
ExecString            = wrks -s
Priority               = medium
DisplayName           = "OIC - mdeploy"
Cartridges            = mdeploy/mdploy
;
[APPLICATION.mdeploy.ENV]
JAVA_HOME             = %ORAWEB_HOME%/jdk
CLASSPATH             =

```

```

%ORACLE_HOME%/orb/4.0/classes/session.jar:%ORACLE_HOME%/orb/4.0/classes/cache.jar:%ORAWEB
_HOME%/jdk/lib/classes.zip:%ORAWEB_HOME%/classes/services.jar:%ORACLE_HOME%/ows/cartx/jwe
b/classes/jweb.jar:%ORACLE_HOME%/orb/4.0/classes/yoj.jar:%ORACLE_HOME%/oec/java/tpi:%ORAC
LE_HOME%/oec/java/oec.zip:%ORACLE_HOME%/oec/storemgr/templates/applet/StrMgr2.zip:%ORACLE
_HOME%/oec/java/NetPerceptionsI.jar:%ORACLE_HOME%/oec/java/OrbixWeb_3.0.4.jar:%ORACLE_HOM
E%/oec/java:%CLASSPATH%
PATH = %ORAWEB_HOME%/jdk/bin/sparc/native_threads:%PATH%
LD_LIBRARY_PATH =
%ORAWEB_HOME%/jdk/lib/sparc/native_threads:%ORACLE_HOME%/ows/cartx/jweb/lib:%ORACLE_HOME%
/oec/lib:%LD_LIBRARY_PATH%
THREADS_FLAG = native
;
[APPLICATION.mdeploy.WEB]
AppMimeTypes = - jpeg,gif
GetClientCert = Disabled
Session = Disabled
SessionIdle = 15
;
[APPLICATION.mdeploy.JAVA]
SYSTEM_PROPERTY = ORAWEB_HOME=%ORAWEB_HOME%
SYSTEM_PROPERTY = ORACLE_HOME=%ORACLE_HOME%
MAX_HEAP = 64M
SYSTEM_PROPERTY =
java.naming.factory.initial=oracle.oas.naming.jndi.CartxInitCtxFactory
;
[APPLICATION.mdeploy.LOG]
logger_logsys = ON
logger_logsys_destdir = /tmp
logger_logsys_destfname = mdeployO_R_A_C_L_E_S_I_D.log
logger_logsys_level = 0
;
[SYSTEM_mdeploy/mdeploy]
JavaWebInterface = 3.0
Stateless = FALSE
ThreadSafe = TRUE
Prestart = 0
MinInstances = 0
MaxInstances = 1
MinThreads = 1
MaxThreads = 1
DisplayName = "OIC - mdeploy"
Application = mdeploy
;
[APPLICATION.ots]
ServerInterface = WEB
ServerRuntime = JAWAWE
CartTimeout = 86400
Hosts = H_O_S_T_N_A_M_E
ExecString = wrks -s
Priority = medium
DisplayName = "OIC - ots"
Cartridges = ots/ots
;
[APPLICATION.ots.ENV]
JAVA_HOME = %ORAWEB_HOME%/jdk
CLASSPATH =
%ORACLE_HOME%/orb/4.0/classes/session.jar:%ORACLE_HOME%/orb/4.0/classes/cache.jar:%ORAWEB
_HOME%/jdk/lib/classes.zip:%ORAWEB_HOME%/classes/services.jar:%ORACLE_HOME%/ows/cartx/jwe
b/classes/jweb.jar:%ORACLE_HOME%/orb/4.0/classes/yoj.jar:%ORACLE_HOME%/oec/java/tpi/otsBr

```



```

idge.zip:%ORACLE_HOME%/oec/java/tpi/ots.zip:%ORACLE_HOME%/oec/java/NetPerceptionsI.jar:%O
RACLE_HOME%/oec/java/OrbixWeb_3.0.4.jar:%ORACLE_HOME%/oec/java:%CLASSPATH%
PATH = %ORAWEB_HOME%/jdk/bin/sparc/native_threads:%PATH%
LD_LIBRARY_PATH =
%ORAWEB_HOME%/jdk/lib/sparc/native_threads:%ORACLE_HOME%/ows/cartx/jweb/lib:%LD_LIBRARY_P
ATH%
THREADS_FLAG = native
;
[APPLICATION.ots.WEB]
AppMimeTypes = - jpeg,gif
GetClientCert = Disabled
Session = Disabled
SessionIdle = 15
;
[APPLICATION.ots.JAVA]
SYSTEM_PROPERTY = ORAWEB_HOME=%ORAWEB_HOME%
SYSTEM_PROPERTY = ORACLE_HOME=%ORACLE_HOME%
MAX_HEAP = 64M
SYSTEM_PROPERTY =
java.naming.factory.initial=oracle.oas.naming.jndi.CartxInitCtxFactory
SYSTEM_PROPERTY = LOCAL_AREA_CODE=650
SYSTEM_PROPERTY = INTERNATIONAL_PREFIX=011
SYSTEM_PROPERTY = LONG_DISTANCE_PREFIX=1
SYSTEM_PROPERTY = LOCAL_COUNTRY_CODE=1
SYSTEM_PROPERTY = OTS_HOST=otsserver.D_O_M_A_I_N
SYSTEM_PROPERTY = OTS_PORT=7777
;
[APPLICATION.ots.LOG]
logger_logsys = ON
logger_logsys_destdir = /tmp
logger_logsys_destfname = otsO_R_A_C_L_E_S_I_D.log
logger_logsys_level = 0
;
[SYSTEM_ots/ots]
JavaWebInterface = 3.0
Stateless = FALSE
ThreadSafe = TRUE
Prestart = 0
MinInstances = 0
MaxInstances = 5
MinThreads = 1
MaxThreads = 5
DisplayName = "OIC - ots"
Application = ots
;
[APPLICATION.cdeploy]
ServerInterface = WEB
ServerRuntime = JAWAWE
CartTimeout = 86400
Hosts = H_O_S_T_N_A_M_E
ExecString = wrks -s
Priority = medium
DisplayName = "OIC - cdeploy"
Cartridges = cdeploy/cdeploy
;
[APPLICATION.cdeploy.ENV]
JAVA_HOME = %ORAWEB_HOME%/jdk
CLASSPATH =
%ORACLE_HOME%/orb/4.0/classes/session.jar:%ORACLE_HOME%/orb/4.0/classes/cache.jar:%ORAWEB

```

```

_HOME%/jdk/lib/classes.zip:%ORAWEB_HOME%/classes/services.jar:%ORACLE_HOME%/ows/cartx/jweb/
b/classes/jweb.jar:%ORACLE_HOME%/orb/4.0/classes/yoj.jar:%ORACLE_HOME%/oec/java/tpi:%ORAC
LE_HOME%/oec/java/oec.zip:%ORACLE_HOME%/oec/java/opay.jar:%ORACLE_HOME%/oec/java/NetPerce
ptionsI.jar:%ORACLE_HOME%/oec/java/OrbixWeb_3.0.4.jar:%ORACLE_HOME%/oec/java:%CLASSPATH%
PATH
    = %ORAWEB_HOME%/jdk/bin/sparc/native_threads:%PATH%
LD_LIBRARY_PATH
    =
%ORAWEB_HOME%/jdk/lib/sparc/native_threads:%ORACLE_HOME%/ows/cartx/jweb/lib:%ORACLE_HOME%
/oec/lib:%LD_LIBRARY_PATH%
THREADS_FLAG
    = native
;
[APPLICATION.cdeploy.WEB]
AppMimeTypes
    = - jpeg,gif
GetClientCert
    = Disabled
Session
    = Disabled
SessionIdle
    = 15
;
[APPLICATION.cdeploy.JAVA]
SYSTEM_PROPERTY
    = ORAWEB_HOME=%ORAWEB_HOME%
SYSTEM_PROPERTY
    = ORACLE_HOME=%ORACLE_HOME%
MAX_HEAP
    = 64M
SYSTEM_PROPERTY
    =
java.naming.factory.initial=oracle.oas.naming.jndi.CartxInitCtxFactory
;
[APPLICATION.cdeploy.LOG]
logger_logsys
    = ON
logger_logsys_destdir
    = /tmp
logger_logsys_destfname
    = cdeployO_R_A_C_L_E_S_I_D.log
logger_logsys_level
    = 0
;
[SYSTEM_cdeploy/cdeploy]
JavaWebInterface
    = 3.0
Stateless
    = FALSE
ThreadSafe
    = TRUE
Prestart
    = 0
MinInstances
    = 0
MaxInstances
    = 10
MinThreads
    = 3
MaxThreads
    = 10
DisplayName
    = "OIC - cdeploy"
Application
    = cdeploy

```

## Appendix I - User and Group Names

This section provides a summary listing of all usernames and groups ports used by the iPrototype on the UNIX.

We recommend that you should the same UNIX group for all users. Typically, this ends up being the group "dba". You may use "dba" even if that exists on your system already. If you are concerned users in the "dba" group should not be able to read files related to the iPrototype Storefront, set the privileges accordingly, or choose another group.

Each application is owned by a different user. We recommend that each username selected include the ORACLE\_SID as part of its name. On large system with many users, this helps organize the usernames so that it is easy to identify their purpose.

We recommend that you choose new usernames that do not yet exist on your UNIX system. The cloning process will create the user directory and place a ".profile" file and other files in the home directory for the user. Choosing a username that exists could result in files for that user being overwritten.

The following table shows some typical choices for usernames. These choices were made assuming you have chosen and ORACLE\_SID=ipr1

| Username | applications owned               |
|----------|----------------------------------|
| ipr1ora  | Oracle database files and code   |
| ipr1ics  | All OAS and iStore code          |
| ipr1sp   | Selling Point*                   |
| ipr1vg   | All Vignette related code        |
| ipr1ap   | All Apache related code          |
| ipr1np   | All Net Perceptions related code |
| ipr1eg   | All Engage Ad Manager code       |

\* Note that Selling Point templates for iStore are in the iStore templates directory and would be owned by ipr1ics.

## Appendix II - Port Usage

This section provides a summary listing of all ports used by the iPrototype on the UNIX server. There are approximately 20 ports required by the iPrototype, depending on the configuration chosen. Note that when the cloning scripts are executed, you are prompted for a base port number which will be used as a starting sequence for all ports numbers. This helps system administrators better keep track of the ports in use on their machines. All ports used by the iPrototype storefront will be in a consecutive range of numbers from 01 to about 40, prefixed with the base port number. Note that not every number in that range is used. The base port number entered serves as a prefix for all port numbers used. The selected base port number will be followed by a 2 digit number which needs to specifically identify a port number to be used on the UNIX system. For example, if you answer 245, then all ports will start with 245, to be followed with two more digits. The result is that you will use ports 24501, 24502, ..., up to approximately 24537.

| <i>Port Number<br/>(prefixed by base<br/>port)</i> | <i>Component Application</i> | <i>Purpose</i>                           |
|----------------------------------------------------|------------------------------|------------------------------------------|
| <b>_01</b>                                         | Apache/Vignette              | Apache Listener for Vignette CAS         |
| <b>_05</b>                                         | Apache/Vignette              | Apache Listener for Vignette             |
| <b>_06</b>                                         | Apache/Vignette              | Apache Listener for Vignette CMD         |
| <b>_07</b>                                         | Apache/Vignette              | Apache Listener for Vignette CTLD        |
| <b>_08</b>                                         | Apache/Vignette              | Apache Listener for Vignette TMD         |
| <b>_09</b>                                         | Apache/Vignette              | Apache Listener for Vignette PAD         |
| <b>_10</b>                                         | Apache/Vignette              | Apache Listener for Vignette PM<br>(CMS) |
| <b>_11</b>                                         | OAS                          | www Port                                 |
| <b>_12</b>                                         | OAS                          | Node Manager Port                        |
| <b>_14</b>                                         | OAS                          | ORB Port                                 |
| <b>_18</b>                                         | OAS                          | admin Port                               |
| <b>_20</b>                                         | OAS                          | mstage Port                              |
| <b>_21</b>                                         | OAS                          | cstage Port                              |
| <b>_22</b>                                         | OAS                          | cdeploy Port                             |
| <b>_23</b>                                         | OAS                          | ots Port                                 |
| <b>_36</b>                                         | Vignette                     | VHS Port                                 |
| <b>_37</b>                                         | Oracle                       | TNS DB Listener                          |

## Appendix III Base Port Number Restrictions

This section describes restrictions on selecting a base port number. Due to certain UNIX conventions, and also to methods used by some of the various software applications, ports set to certain numbers will not work, or will require special attention in order to make them work properly. For these reasons, we recommend that you do not use certain numbers.

You may select a zero to three digit number as the base port number. Note that UNIX requires that any port number under a certain number requires root access to start the application which uses that number. Some of the applications have a maximum port number value above which they will not work. Therefore, there are certain minimum and maximum base port numbers which are recommended.

The cutoff point requiring root access on UNIX system is 1024. If you choose, 10 as the base port number, then you would require root access to start all applications. This is because you would end up using ports 1001, 1002, ... etc., which are under the 1024 cutoff point. For this reason, we generally recommend that you choose a number greater than or equal to 11 for the base port number.

Note that Vignette requires that you start it from root. It is the only application which requires root access. All other applications can be started from a non privileged account.

Vignette has a maximum port number requirement. You should not go over 32000. Therefore you should not exceed 320 as the maximum base port number.

The recommended value for the base port number is in the range 11..320.

### Making your iPrototype Storefront the default application for your machine

Note that you may want your storefront to be the default application served when a web browser makes a request to your server. For example, you want to be able to request `http://www.myserver.com` and receive the home page of the storefront, instead of having to include a port number and making a request like `http://www.myserver.com:24501`. This can be done easily although it is not supported as an automatic feature of the scripts.

The default port number is 80 for any request to a server which does not include a port number. This means that `http://www.myserver.com` is essentially a request to `http://www.myserver.com:80`. In the iPrototype Storefront configuration, to make your server send the storefront when no port number is included, you must set the cstage listener defined in OAS listen on port 80. This implies you can't already have another application responding to port 80. You must make this change after the installation is completed.

- Edit the cstage.cfg file
- Change the port number reference to use the value of 80
- Stop and restart OAS (using the stop and start procedures in the ipr1ics user from the example)

If you reconfigure your store to use another listener, that listener must be set to listen on port 80.

## Appendix IV Required Setup Information

The following table contains all the information requested by the setup script. The first choice is to determine the type of setup to be performed. In most cases, you will want to choose option F to perform the complete setup. You have the option of selecting the individual components one at a time if you would like to place one of them on a different server, or vary the standard setup associated with a complete installation.

Columns designed with a value of TBD will have values that are subject to change and therefore could not be defined in this document. A default value will exist when you actually run the script, and the value provided will be appropriate for each release. In most cases, this value should not be changed. The production release of the cloning scripts may hide these prompts.

| <i>Setup Prompt</i>                                                 | <i>Default Value</i> | <i>Value Options</i>                                        | <i>Description</i>                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------|----------------------|-------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Please specify 1 of the 4 installation types to be performed</b> | F                    | V, I, D, F, X                                               | F = install the complete solution<br>V = install Vignette and Apache only<br>I = install iStore, OAS, and iMarketing only<br>D = install database only<br>X = exit setup without performing any actions                                                                                                                                                                              |
| <b>Will Vignette be part of the solution set (Y or N) [Y]</b>       | y                    | Y, N                                                        | Y = install Vignette<br>N = do not install Vignette<br>This question is only needed if you choose to perform a full install, but you are not including Vignette in the solution set                                                                                                                                                                                                  |
| <b>Would you like to see debugging information</b>                  | N                    | Y,N                                                         | Y = include extended debugging info in the installation log files<br>N = include standard debugging info in the installation log files                                                                                                                                                                                                                                               |
| <b>Enter the installation home directory</b>                        | current directory    |                                                             | directory where setup.sh is located. If have set your directory to where the setup.sh is located, it is automatically determined for you                                                                                                                                                                                                                                             |
| <b>Enter the base user directory</b>                                | /users               | any valid directory (existing or one that could be created) | Location under which the home directory for the users will be created. The home directories will be created if they don't already exist (recommended). You would typically choose an existing directory under which user home directories exist and you would choose new usernames which result in new directories created under the existing /users directory, e.g., /users/ipr1ora |
| <b>Enter the base applications directory</b>                        | [/u01/app]           | any valid directory (existing or one that could be created) | Directories will be created if they don't exist (recommended). The names will be the same as the username chosen to own each application, e.g., /u01/app/ipr1ora                                                                                                                                                                                                                     |

|                                                 |                                      |                     |                                                                                                                                                                                                                                           |
|-------------------------------------------------|--------------------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Enter the old hostname</b>                   | TBD                                  | Do not change       | Since this method is a clone of a working storefront built in Oracle's eBusiness Center, the installation needs to know the previous machine name so that it can be updated on your new machine. You must accept the default value.       |
| <b>Enter the old ORACLE_SID</b>                 | TBD                                  | Do not change       | Since this method is a clone of a working storefront built in Oracle's eBusiness Center, the installation needs to know the previous ORACLE_SID name so that it can be updated on your new machine. You must accept the default value.    |
| <b>Enter the old Apache Base number</b>         | TBD                                  | Do not change       | Since this method is a clone of a working storefront built in Oracle's eBusiness Center, the installation needs to know the previous Apache base number so that it can be updated on your new machine. You must accept the default value. |
| <b>Enter the Oracle OS username</b>             | ipr1ora                              | any valid username  | Please refer to the Appendix section on User and Group names                                                                                                                                                                              |
| <b>Enter the Apache OS username</b>             | ipr1ap                               | any valid username  | Please refer to the Appendix section on User and Group names                                                                                                                                                                              |
| <b>Enter the iStore OS username</b>             | ipr1ics                              | any valid username  | Please refer to the Appendix section on User and Group names                                                                                                                                                                              |
| <b>Enter the Net Perceptions OS username</b>    | ipr1np                               | any valid username  | Please refer to the Appendix section on User and Group names                                                                                                                                                                              |
| <b>Enter the Vignette OS username</b>           | ipr1vg                               | any valid username  | Please refer to the Appendix section on User and Group names                                                                                                                                                                              |
| <b>Enter the old Vignette CAS Port</b>          | TBD                                  | Do not change       | Since this method is a clone of a working storefront built in Oracle's eBusiness Center, the installation needs to know the previous Apache base number so that it can be updated on your new machine. You must accept the default value. |
| <b>Enter the old Vignette base directory</b>    | TBD                                  | Do not change       | Since this method is a clone of a working storefront built in Oracle's eBusiness Center, the installation needs to know the previous Apache base number so that it can be updated on your new machine. You must accept the default value. |
| <b>Enter the new Group name for these users</b> | dba                                  | any valid groupname | Please refer to the Appendix section on User and Group names                                                                                                                                                                              |
| <b>Enter the new ORACLE_SID</b>                 | ipr1                                 | any valid SID       | ORACLE_SID is the system identifier which uniquely identifies the database                                                                                                                                                                |
| <b>Enter the location for your ORACLE_BASE</b>  | based on base applications directory | any valid directory | You should generally accept the default value based on the base applications directory you entered earlier. It will automatically assume /bd/username where bd is the base directory from above and username is the username              |

|                                                            |                                               |                                                                         |                                                                                                                                                                                                                                                                     |
|------------------------------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enter the location for your ORACLE_HOME                    | ORACLE_B<br>ASE/produ<br>ct/805               | Do not change                                                           | owning the application<br>You must accept the default location. This is a fixed value once you determine the ORACLE_BASE location                                                                                                                                   |
| Enter the location for your ORACLE_OAS_B ASE               | based on<br>base<br>applications<br>directory | any valid<br>directory                                                  | You should generally accept the default value based on the base applications directory you entered earlier. It will automatically assume /bd/username where bd is the base directory from above and username is the username owning the iStore and OAS application  |
| Enter the location for your ORACLE_OAS_P ROD_BASE          | ORACLE_B<br>ASE/produ<br>ct/OAS4081           | Do not change                                                           | You must accept the default location. This is a fixed value once you determine the ORACLE_OAS_BASE location                                                                                                                                                         |
| Enter your new OAS_SITE_NAME                               | ORACLE_SI<br>D                                | Any valid site<br>name                                                  | This is the site name for OAS. This can be changed, but it is recommended that you use the default value of the ORACLE_SID                                                                                                                                          |
| Enter your old OAS_SITE_NAME                               | TBD                                           | Do not change                                                           | Since this method is a clone of a working storefront built in Oracle's eBusiness Center, the installation needs to know the previous Apache base number so that it can be updated on your new machine. You must accept the default value.                           |
| Enter the location for your Vignette base directory        | based on<br>base<br>applications<br>directory | any valid<br>directory                                                  | You should generally accept the default value based on the base applications directory you entered earlier. It will automatically assume /bd/username where bd is the base directory from above and username is the username owning the iStore and OAS application  |
| Enter the location for your Apache base directory          | based on<br>base<br>applications<br>directory | any valid<br>directory                                                  | You should generally accept the default value based on the base applications directory you entered earlier. It will automatically assume /bd/username where bd is the base directory from above and username is the username owning the iStore and OAS application  |
| Enter the Apache Ports Base                                | 245                                           | up to a 3 digit<br>number*                                              | Please refer to the Appendix section on Base Port numbers                                                                                                                                                                                                           |
| Enter the location for your Net Perceptions base directory | based on<br>base<br>applications<br>directory | any valid<br>directory                                                  | You should generally accept the default value based on the base applications directory you entered earlier. It will automatically assume /bd/username where bd is the base directory from above and username is the username owning the Net Perceptions application |
| Enter the new Net Perceptions port                         | 24535                                         | valid port<br>number                                                    | You should accept the default value                                                                                                                                                                                                                                 |
| Enter the parent Oracle database file directory            | /u01/orada<br>ta                              | any valid<br>directory<br>(existing or<br>one that could<br>be created) | Directories will be created if they don't exist (recommended). The names will be the same as the username chosen to own each application, e.g., /u01/app/iplora                                                                                                     |
| Enter the base Oracle database                             | based on the<br>parent                        | any valid<br>directory                                                  | You should generally accept the default value based on the parent Oracle directory you entered earlier. It will automatically assume                                                                                                                                |



|                                                              |                  |                                                 |                                                                                                                                                                                                                      |
|--------------------------------------------------------------|------------------|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>file directory</b>                                        | Oracle directory | directory                                       | entered earlier. It will automatically assume /pd/SID where pd is the parent Oracle directory from above and SID is the ORACLE_SID from above                                                                        |
| <b>Enter the database server hostname if different</b>       | current server   | valid server name                               | This is required if you plan on using a multitier approach and you are installing the iStore/OAS/iMarketing option on the middle tier. You must supply the database server name                                      |
| <b>Enter the new domain</b>                                  | TBD              | any valid domain name                           | You should enter your domain, or the domain where the server will reside, typically "company.com"                                                                                                                    |
| <b>Enter the new proxy server</b>                            | TBD              | the machine and domain name of the proxy server | You must supply the correct proxy server name and domain for you environment, e.g., proxy.company.com                                                                                                                |
| <b>Enter the new proxy port</b>                              | 80               | proper port number                              | Enter the proper port number for you proxy server                                                                                                                                                                    |
| <b>Enter the OAS Ports Base</b>                              | 245              | up to a 3 digit number                          | Refer to the Appendix section on Base Port number                                                                                                                                                                    |
| <b>Enter the directory location containing the TAR files</b> | TBD              | existing directory where tar file are located   | This is the directory where the tar files are located, either on CD, in which case it is already known, or on disk, where you would have to specify where you placed the files                                       |
| <b>Enter the directory in which to place startup scripts</b> | TBD              | enter a valid directory                         | Valid directory where you want to place your startup scripts. If you do not use the standard UNIX directory, you must copy this script to that locatoin so that the application starts up automatically at boot time |
| <b>Enter the directory to write installation log files</b>   | /tmp             | enter a valid directory                         | Valid directory where you want to place your installation log files.                                                                                                                                                 |
| <b>Enter the summary file name</b>                           | summary.log      | any valid filename                              | enter a filename for the summary log file                                                                                                                                                                            |
| <b>Enter the installation log file name</b>                  | install.log      | any valid filename                              | enter a filename for the log file                                                                                                                                                                                    |

## Appendix V Shell Script Reference

This section gives an overview of the iPrototype Cloning scripts. They actually consist of a number of individual scripts performing various functions. It is not necessary to completely understand what each script does. You may execute the scripts without having read this section, but must be familiar with all other parts of this document before performing the installation.

The following table explains the main shell scripts which comprise the cloning scripts. Note that in many cases, for each application, there is a separate version of each script performing lower level functions. For example, to create users, there is a createUsers.sh script referenced. There are actually about five scripts for creating users. In the interest of brevity, the table shall list one script for each purpose. A name followed by the symbol "\*" indicates there are multiple versions of this file.

As mentioned above, there is only one script which must be executed, and all other scripts will be called by that script, or a script which was called by the initial script. The initial script is called setup.sh.

The purpose of setup.sh is to prompt you for all the required information in order to clone the iPrototype Storefront and then to call the appropriate supporting scripts to perform actual installation.

Note that you must be logged in as root in order to execute the cloning scripts.

| Script Name            | Called By       | Purpose                                                                                                                                                                                     |
|------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>setup.sh</b>        | executed by you | This is the first and only script you must execute. It takes no parameters, prompts you for all required information, and calls the appropriate scripts to perform the desired installation |
| <b>main.sh</b>         | setup.sh        | Verifies certain information and calls the appropriate installation script                                                                                                                  |
| <b>check_access.sh</b> | main.sh         | Checks for proper privileges by verifying you are logged in as root                                                                                                                         |
| <b>check_sid.sh</b>    | main.sh         | Verifies we are not using the same ORACLE_SID as the old one                                                                                                                                |
| <b>check_setup.sh</b>  | main.sh         | Displays the value of all parameters storing the answer to the setup questions                                                                                                              |
| <b>install.sh*</b>     | main.sh         | Main installation procedure (separate version for each installation option)                                                                                                                 |
| <b>unTar.sh*</b>       | install.sh*     | Untars the appropriate tar file (separate version for each installation option)                                                                                                             |
| <b>setLinks.sh</b>     | install.sh*     | Define proper UNIX directory and file links                                                                                                                                                 |
| <b>createUsers.sh*</b> | install.sh*     | Create the appropriate user (separate version for each installation option)                                                                                                                 |

|                               |             |                                                                                                                     |
|-------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------|
| <b>setOwners.sh*</b>          | install.sh* | Sets the ownership of files just untarred to the username just created                                              |
| <b>setInit.sh</b>             | install.sh* | Creates the startup and stop scripts for starting and stopping the applications                                     |
| <b>configureApache.sh</b>     | install.sh* | Configure the Apache files for the new server                                                                       |
| <b>configureVignette.sh</b>   | install.sh* | Configure the Vignette files for the new server                                                                     |
| <b>updateNetp.sh</b>          | install.sh* | Updates Net Perceptions database                                                                                    |
| <b>reconfigureVignette.sh</b> | install.sh* | ReConfigures the new Vignette CAS on the new server. The database and Vignette must be up and running for this step |
| <b>configureOAS.sh</b>        | install.sh* | Configures the OAS files for the new machine                                                                        |
| <b>setNet.sh*</b>             | install.sh* | Creates the proper TNSNAMES and LISTENER files                                                                      |
| <b>configureNetp.sh</b>       | install.sh* | Configures the Net Perceptions files for the new machine                                                            |
| <b>configureICS.sh</b>        | install.sh* | Configures the iStore files for the new machine                                                                     |
| <b>setOratab.sh</b>           | install.sh* | Create the necessary oratab entry                                                                                   |
| <b>configureDB.sh</b>         | install.sh* | Configures the Oracle database files                                                                                |